

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

UTILITY PATENT
APPLICATION TRANSMITTAL LETTER

Box PATENT APPLICATION
Assistant Commissioner for Patents
Washington, D.C. 20231

Sir:

Enclosed for filing is the utility patent application of Shigeto OHMORI and Yuichiro ORI
for A LENS OPTICAL SYSTEM.

Also enclosed are:

- ☒ 39 sheets of drawings;
- ☒ a claim for foreign priority under 35 U.S.C. §§ 119 and/or 365 is ☐ hereby made to __
filed in __ on __;
☒ in the declaration;
- ☐ a certified copy of the priority document;
- ☐ a General Authorization for Petitions for Extensions of Time and Payment of Fees;
- ☐ _____ statement(s) claiming small entity status;
- ☒ an Assignment document;
- ☐ an Information Disclosure Statement; and
- ☐ Other: _____
- ☒ An ☒ executed ☐ unexecuted declaration of the inventor(s)
☒ also is enclosed ☐ will follow.
- ☐ Please amend the specification by inserting before the first line the sentence --This
application claims priority under 35 U.S.C. §§119 and/or 365 to __ filed in __ on __; the
entire content of which is hereby incorporated by reference.--
- ☐ A bibliographic data entry sheet is enclosed.



21839

☒ The filing fee has been calculated as follows ☐ and in accordance with the enclosed preliminary amendment:

CLAIMS					
	NO. OF CLAIMS		EXTRA CLAIMS	RATE	FEE
Basic Application Fee					\$760.00 (101)
Total Claims	15	MINUS 20 =	0	x \$18.00 (103)	0
Independent Claims	3	MINUS 3 =	0	x \$78.00 (102)	0
If multiple dependent claims are presented, add \$260.00 (104)					0
Total Application Fee					\$760.00
If verified Statement claiming small entity status is enclosed, subtract 50% of Total Application Fee					0
Add Assignment Recording Fee of if Assignment document is enclosed					\$40.00
TOTAL APPLICATION FEE DUE					\$800.00

- ☐ This application is being filed without a filing fee. Issuance of a Notice to File Missing Parts of Application is respectfully requested.
- ☒ A check in the amount of \$ 800.00 is enclosed for the fee due.
- ☐ Charge \$ _____ to Deposit Account No. 02-4800 for the fee due.
- ☒ The Commissioner is hereby authorized to charge any appropriate fees under 37 C.F.R. §§ 1.16, 1.17 and 1.21 that may be required by this paper, and to credit any overpayment, to Deposit Account No. 02-4800. This paper is submitted in duplicate.

Please address all correspondence concerning the present application to:

Platon N. Mandros
Burns, Doane, Swecker & Mathis, L.L.P.
P.O. Box 1404
Alexandria, Virginia 22313-1404.

Respectfully submitted,

BURNS, DOANE, SWECKER & MATHIS, L.L.P.

Date: November 30, 1999

By: William Chouard RN 30888, for
Platon N. Mandros
Registration No. 22,124

P.O. Box 1404
Alexandria, Virginia 22313-1404
(703) 836-6620

A LENS OPTICAL SYSTEM

This application is a continuation-in-part of U. S. Patent Application Serial No. 09/294,385, entitled "A Lens Optical System", filed on April 20, 1999, the disclosure of which is expressly incorporated herein by reference.

BACKGROUND OF THE INVENTION

Field of the Invention

The present invention relates to a lens optical system, and more particularly to a lens optical system that employs a cemented lens element having a diffraction grating.

Description of the Prior Art

A lens element that has a light-condensing ability offered by a diffraction grating formed thereon (hereafter such a lens element will be referred to as a diffractive lens element) has useful optical properties that are not found in a well-known refractive lens element. For example, a diffractive lens element offers the following advantages. First, by providing a diffractive lens element on a lens surface of an ordinary refractive lens element, it is possible to give a single lens element both light-diffracting and light-refracting abilities. Second, a diffractive lens element makes effective correction of chromatic aberration possible because, in it, the quantity that corresponds to the dispersive power of a refractive lens element has the opposite sign.

Accordingly, by providing a diffractive lens element on a lens surface of a refractive lens element, it is possible to correct chromatic aberration, which is conventionally corrected by the use of a combination of two, a positive and a negative, refractive lens elements, by the use of a single lens element. Although a diffractive lens element has
5 useful properties as described above, it also suffers from problems resulting from the fact that the diffraction efficiency of the diffraction grating is wavelength-dependent. For example, except at the design wavelength, the diffracted light of orders other than the intended order is too intense. This causes ghosts, and thereby degrades imaging performance. In particular, an optical system designed for white light, i.e. one that
10 needs to cope with a wide range of wavelengths, suffers greatly from this problem.

To solve this problem, United States Patent No. 5,847,877 and a report written by Steven M. Ebstein (the September 15, 1996 issue of Optical Society of America) each propose a diffractive optical element of the type that has a relief pattern constituting a diffraction grating formed at the cementing interface between two different optical
15 materials. Here, by exploiting the fact that the difference in refractive index between two optical materials depends on the wavelength, the wavelength-dependent variation in phase difference is successfully prevented, and thereby higher diffraction efficiency is achieved over a wide wavelength range.

However, to realize such a diffraction grating, a couple of requirements as noted
20 below need to be satisfied.

First, to obtain sufficiently high diffraction efficiency, the diffraction grating needs to be composed of an optical material that has a relatively high refractive index

and a relatively low dispersion and an optical material that has a relatively low refractive index and a relatively high dispersion.

Second, it is necessary to make the blaze vertex angle as great as possible. When the blaze shape of a diffraction grating is manufactured by molding, the larger
5 the blaze vertex angle, which is determined in terms of the grating height and the grating pitch of the diffraction grating, the more easily the material can be filled up to the very tip of the blaze vertex. Thus, the larger the blaze vertex angle, the more accurately the blaze shape can be transferred (i.e. molded). Test manufacturing revealed that, by setting the blaze vertex angle to be around 70°, it is possible to
10 achieve satisfactorily accurate transfer (i.e. molding).

Hereafter, the second requirement noted above will be described in more detail with reference to Fig. 11 illustrating a blaze shape. In Fig. 11, Θ represents the blaze vertex angle; h_0 represents the grating height (i.e. the trough-to-ridge height) of the diffraction grating; and d represents the grating pitch. If it is assumed that the
15 refractive index of the medium that exists on the incident side at the design wavelength λ_0 is n_0 , and that the refractive index of the medium that exists on the exiting side at the design wavelength λ_0 is n'_0 , then the grating height (h_0) of the diffraction grating is defined by the formula : $h_0 = \lambda_0 / (n_0 - n'_0)$.

The grating pitch (d) represents the intensity of the light-diffracting action.
20 The smaller the grating pitch (d), the stronger the light-diffracting action. That is, in a diffractive lens element, the smaller the grating pitch (d) it has, the stronger the diffractive power it exerts. Accordingly, if a diffractive lens element is used to correct

the chromatic aberration caused by a lens element made of high-dispersion glass, or by a lens element having a strong optical power, the diffractive lens element needs to be given a comparatively strong diffractive optical power. Moreover, since a diffractive lens element needs to be so shaped that its light-diffracting action becomes stronger gradually from the center to the edge, the larger the effective diameter of the lens element, the smaller the grating pitch (d) needs to be at the edge of the lens element.

Furthermore, the larger the blaze vertex angle (Θ), the more easily the material can be filled up to the very tip of the blaze vertex. This makes accurate transfer (i.e. molding) of the blaze shape possible. The lower the grating height (h_0) of the diffraction grating, and the greater the grating pitch (d), the greater the blaze vertex angle (Θ) can be made. However, to satisfy the first requirement noted above, the diffraction grating needs to have a grating height (h_0) as high as about 6 to 17 μm . Accordingly, if chromatic aberration is corrected solely by a diffractive lens element, in order to obtain a sufficiently strong diffractive optical power as required, the diffractive lens element needs to have an unduly small grating pitch (d) and thus an unduly small blaze vertex angle (Θ). This degrades the transfer accuracy of the blaze shape.

Next, how chromatic aberration is corrected by means of a diffractive lens element will be described. In general, chromatic aberration is corrected in such a way that the imaging position of light having the wavelength of the F line coincides with the imaging position of light having the wavelength of the C line. In this case, however, the imaging position of light having the wavelength of the F line deviates from the

imaging position of light having the wavelength of the d line, and simultaneously the imaging position of light having the wavelength of the d line deviates from the imaging position of light having the wavelength of the C line. This is called the secondary spectrum. The secondary spectrum tends to be larger where chromatic aberration is
5 corrected by the use of a diffractive lens element than where chromatic aberration is corrected by the use of a combination of two, a positive and a negative, refractive lens elements. To minimize also the secondary spectrum, it is preferable that chromatic aberration be corrected by the use of both a diffractive lens element and a combination of two, a positive and a negative, refractive lens elements.

SUMMARY OF THE INVENTION

An object of the present invention is to provide a lens optical system in which chromatic aberration is corrected properly by effective use of a diffractive lens element
15 that offers high diffraction efficiency over a wide wavelength range.

To achieve the above object, according to one aspect of the present invention, an optical system is provided with a cemented lens element formed by cementing at least two constituent lens elements made of different optical materials together. The cemented lens element has at its cementing interface a diffractive optical surface.
20 The two constituent lens elements have at their respective interfaces with air a radius of curvature different from the radius of curvature that they have at the cementing interface.

According to another aspect of the present invention, an optical system designed for use in a taking optical system for projecting an image on a solid-state image sensor is provided with a cemented lens element and an optical low-pass filter. The cemented lens element is formed by cementing at least two constituent lens
5 elements made of different optical materials together, with a diffractive optical surface formed at the cementing interface between the two constituent lens elements. The two constituent lens elements have at their respective interfaces with air a radius of curvature different from the radius of curvature that they have at the cementing interface. The optical low-pass filter is disposed between the optical system and the
10 image-sensing surface of the solid-state image sensor.

According to still another aspect of the present invention, a method for correcting aberration comprises a step of disposing a cemented lens element in the optical system, and a step of optimizing correction of all the aberrations occurring over the entire optical system. The cemented lens element is formed by cementing at least
15 two constituent lens elements made of different optical materials together, with a diffractive optical surface formed at the cementing interface between the two constituent lens elements. The two constituent lens elements have at their respective interfaces with air a radius of curvature that is different from the radius of curvature that they have at the cementing interface.

20

BRIEF DESCRIPTION OF THE DRAWINGS

This and other objects and features of this invention will become clear from the

following description, taken in conjunction with the preferred embodiments with reference to the accompanied drawings in which:

Figs. 1A to 1C are lens arrangement diagrams of the lens optical system of a first embodiment (Example 1) of the present invention;

5 Figs. 2A to 2C are lens arrangement diagrams of the lens optical system of a second embodiment (Example 2) of the present invention;

Figs. 3A to 3C are lens arrangement diagrams of the lens optical system of a third embodiment (Example 3) of the present invention;

10 Fig. 4 is a lens arrangement diagram of the lens optical system of a fourth embodiment (Example 4) of the present invention;

Figs. 5A to 5C are lens arrangement diagrams of a lens optical system taken up as an example for comparison (Comparison Example 1);

Figs. 6A to 6I are graphic representations of the aberrations observed in the lens optical system of Example 1;

15 Figs. 7A to 7I are graphic representations of the aberrations observed in the lens optical system of Example 2;

Figs. 8A to 8I are graphic representations of the aberrations observed in the lens optical system of Example 3;

20 Figs. 9A to 9C are graphic representations of the aberrations observed in the lens optical system of Example 4;

Figs. 10A to 10I are graphic representations of the aberrations observed in the lens optical system of Comparison Example 1;

Fig. 11 is a diagram illustrating a blaze shape;

Figs. 12A to 12C are lens arrangement diagrams of the lens optical system of a fifth embodiment (Example 5) of the present invention;

5 Figs. 13A to 13I are graphic representations of the aberrations observed in the lens optical system of Example 5;

Figs. 14A to 14C are lens arrangement diagrams of a lens optical system taken up as an example for comparison (Comparison Example 2);

Figs. 15A to 15I are graphic representations of the aberrations observed in the lens optical system of Comparison Example 2;

10 Figs. 16A to 16C are diagrams illustrating the astigmatism and the Petzval effect obtained when a diffractive lens element is used;

Figs. 17A to 17C are lens arrangement diagrams of the lens optical system of a sixth embodiment (Example 6) of the present invention;

15 Figs. 18A to 18I are graphic representations of the aberrations observed in the lens optical system of Example 6;

Figs. 19A to 19C are lens arrangement diagrams of a lens optical system taken up as an example for comparison (Comparison Example 3);

Figs. 20A to 20I are graphic representations of the aberrations observed in the lens optical system of Comparison Example 3;

20 Figs. 21A to 21C are diagrams illustrating the astigmatism and the Petzval effect obtained when a diffractive lens element is used;

Figs. 22A to 22C are lens arrangement diagrams of the lens optical system of a

seventh embodiment (Example 7) of the present invention;

Figs. 23A to 23I are graphic representations of the aberrations observed in the lens optical system of Example 7;

5 Figs. 24A to 24C are lens arrangement diagrams of the lens optical system of an eighth embodiment (Example 8) of the present invention;

Figs. 25A to 25I are graphic representations of the aberrations observed in the lens optical system of Example 8;

Figs. 26A to 26C are lens arrangement diagrams of the lens optical system of a ninth embodiment (Example 9) of the present invention;

10 Figs. 27A to 27I are graphic representations of the aberrations observed in the lens optical system of Example 9;

Figs. 28A to 28C are lens arrangement diagrams of the lens optical system of a tenth embodiment (Example 10) of the present invention;

15 Figs. 29A to 29I are graphic representations of the aberrations observed in the lens optical system of Example 10;

Figs. 30A to 30C are lens arrangement diagrams of a lens optical system taken up as an example for comparison (Comparison Example 4);

Figs. 31A to 31I are graphic representations of the aberrations observed in the lens optical system of Comparison Example 4;

20 Figs. 32A to 32C are diagrams illustrating the astigmatism and the Petzval effect obtained when a diffractive lens element is used;

Figs. 33A and 33B are diagrams illustrating the effects of the grating height in

cases where a light ray is obliquely incident on a blaze-formed diffraction grating;

Fig. 34 is a diagram showing the relationship between the grating pitch and the diffraction efficiency at an angle of incidence of 10° ;

Fig. 35 is an optical path diagram illustrating an angle of incidence with respect
5 to the lens optical system;

Figs. 36A to 36C are lens arrangement diagrams of the lens optical system of an eleventh embodiment (Example 11) of the present invention;

Figs. 37A to 37I are graphic representations of the aberrations observed in the lens optical system of Example 11;

10 Figs. 38A to 38C are lens arrangement diagrams of a lens optical system taken up as an example for comparison (Comparison Example 5);

Figs. 39A to 39I are graphic representations of the aberrations observed in the lens optical system of Comparison Example 5; and

Figs. 40A to 40C are diagrams illustrating the astigmatism and the Petzval effect
15 obtained when a diffractive lens element is used.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

Hereinafter, lens optical systems embodying the present invention will be described with reference to the drawings. Figs. 1A to 1C, 2A to 2C, 3A to 3C, and 4 are
20 lens arrangement diagrams of the lens optical systems of a first, a second, a third, and a fourth embodiment, respectively, of the present invention. The lens optical systems of the first to third embodiments are each built as a zoom lens system, and the lens

optical system of the fourth embodiment is built as a fixed-focal-length lens system. Of these diagrams, Figs. 1A, 2A, and 3A illustrate the lens arrangements of the respective lens optical systems in the wide-angle-end condition [W], Figs. 1B, 2B, and 3B illustrate the lens arrangements of the respective lens optical systems in the middle-focal-length condition [M], and Figs. 1C, 2C, and 3C illustrate the lens arrangements of the respective lens optical systems in the telephoto-end condition [T].

In these diagrams, arrow m_j ($j = 1, 2, \text{ and } 3$) schematically indicates the movement of the j th lens unit (Gr_j) during zooming, and d_i ($i = 1, 2, 3, \dots$) represents the i th axial distance counted from the object side, though only those axial distances that vary with zooming (i.e. variable axial distances) are indicated. In each lens arrangement diagram, r_i ($i = 1, 2, 3, \dots$) represents the i th surface counted from the object side (note that the last surface is the image plane (I)), a surface r_i marked with an asterisk (*) is an aspherical surface, and a surface r_i marked with # is a diffractive optical surface (i.e. a surface having a relief pattern constituting a diffraction grating formed thereon). Note that a cemented lens element having a diffraction grating is composed of a diffractive lens element marked [DOE] and a refractive lens element marked either p or g depending on whether its power bears the opposite sign to or the same sign as the power of the diffractive lens element, respectively.

Figs. 12A to 12C; 17A to 17C; 22A to 22C; 24A to 24C; 26A to 26C; 28A to 28C; and 36A to 36C are lens arrangement diagrams of the lens optical systems of a fifth, a sixth, a seventh, an eighth, a ninth, a tenth, and an eleventh embodiment, respectively, of the present invention. Of these diagrams, Figs. 12A, 17A, 22A, 24A, 26A, 28A, and

36A illustrate the lens arrangements of the respective lens optical systems in the wide-angle-end condition [W], Figs. 12B, 17B, 22B, 24B, 26B, 28B, and 36B illustrate the lens arrangements of the respective lens optical systems in the middle-focal-length condition [M], and Figs. 12C, 17C, 22C, 24C, 26C, 28C, and 36C illustrate the lens arrangements of the respective lens optical systems in the telephoto-end condition [T]. In these diagrams, an air gap marked with d_i ($i = 1, 2, 3, \dots$) is the i th axial distance counted from the object side, though only those axial distances that vary with zooming (i.e. variable axial distances) are indicated. Moreover, in these diagrams, a surface marked with r_i ($i = 1, 2, 3, \dots$) is the i th surface counted from the object side (note that the last surface is the image plane (I)), a surface r_i marked with an asterisk (*) is an aspherical surface, and a surface r_i marked with # is a diffractive lens surface, i.e. a lens surface having a diffraction grating formed thereon.

Embodiments 1 to 4

The lens optical system of the first embodiment (Figs. 1A to 1C) is composed of a first lens unit (Gr1) having a lens element (L1) and a cemented lens element (L2), a second lens unit (Gr2) having a lens element (L3) and a cemented lens element (L4), a third lens unit (Gr3) having an aperture stop (S), a cemented lens element (L5), and a lens element (L6), and a low-pass filter (LPF). The lens optical system of the second embodiment (Figs. 2A to 2C) is composed of a first lens unit (Gr1) having a cemented lens element (L1), a second lens unit (Gr2) having a lens element (L2) and a cemented lens element (L3), a third lens unit (Gr3) having an aperture stop (S) and two lens

elements (L4 and L5), and a low-pass filter (LPF). The lens optical system of the third embodiment (Figs. 3A to 3C) is composed of a first lens unit (Gr1) having a lens element (L1) and a cemented lens element (L2), a second lens unit (Gr2) having an aperture stop (S) and a cemented lens element (L3), and a low-pass filter (LPF). The

5 lens optical system of the fourth embodiment (Fig. 4) is composed of an aperture stop (S), a lens element (L1), a cemented lens element (L2), and a low-pass filter (LPF).

As described above, each of the lens optical systems of the first to fourth embodiments includes a cemented lens element composed of two lens elements made of different materials. Here, the cemented lens element has at its cementing surface
10 (interface) a diffraction grating constituted by a relief pattern, and its two constituent lens elements each have at their interfaces with air a radius of curvature different from the radius of curvature they have at the interface therebetween. In this way, in these embodiments, effective use of a diffractive lens element that offers high diffraction efficiency over a wide wavelength range makes it possible to correct chromatic
15 aberration properly.

In a lens optical system, like those of the first to fourth embodiments, having a cemented lens element, it is preferable that the cemented lens element have a diffraction grating constituted by a relief pattern formed at the interface between its two constituent lens elements and fulfill Condition (1) below.

20

$$0.1 \leq (\phi_p / v_d) / (\phi_{DOE} / v_{DOE}) \leq 35 \quad (1)$$

where

ϕ_p represents the refractive optical power of that one of the two lens elements constituting the cemented lens element which has a refractive optical power of the opposite sign to the diffractive optical power of the interface (note that ϕ_p does not include the diffractive optical power);

v_d represents the Abbe number of the material of that one of the two lens elements constituting the cemented lens element which has a refractive optical power of the opposite sign to the diffractive optical power of the interface;

ϕ_{DOE} represents the diffractive optical power of the interface; and

v_{DOE} represents the Abbe-number-equivalent value of the interface.

In a lens optical system, by correcting chromatic aberration by the use of both a diffractive lens element and a combination of two, a positive and a negative, refractive lens elements in such a way that Condition (1) is fulfilled, it is possible:

(A) to minimize the light-diffracting action required in the diffraction grating so that the grating pitch (d) can be made so great as to permit the blaze vertex angle (Θ) to be 70° or more, and

(B) to correct chromatic aberration and the secondary spectrum properly.

If the lower limit of Condition (1) is exceeded, the degree to which the diffractive lens element needs to correct chromatic aberration becomes unduly high, and thus the

blaze vertex angle of the diffraction grating needs to be made smaller than 70°, or the secondary spectrum becomes too large. If the upper limit of Condition (1) is exceeded, the degree to which the chromatic aberration caused by the optical power of one of the refractive lens elements constituting the cemented lens element is corrected by the chromatic aberration caused by the optical power of the opposite sign of the other becomes unduly high. This requires that the two refractive lens elements be given unduly large (one positive and the other negative) powers. Accordingly, the radii of curvature of the lens surfaces of those lens elements need to be reduced, and thus they cause larger aberrations. As a result, in order to correct the resultant aberrations properly, it is inevitable to use a larger number of lens elements. This leads to an undesirable increase in the manufacturing cost and the size of the optical system.

In a lens optical system, like those of the first to fourth embodiments, having a cemented lens element, it is preferable that the cemented lens element have a diffraction grating constituted by a relief pattern formed at the interface between its two constituent lens elements and fulfill Condition (2) below.

$$0.04 \leq t_p / t_g \leq 5 \quad (2)$$

where

t_p represents the axial distance of that one of the two lens elements constituting the cemented lens element which has a refractive optical power of the

opposite sign to the diffractive optical power of the interface; and
tg represents the axial distance of that one of the two lens elements constituting
the cemented lens element which has a refractive optical power of the
same sign as the diffractive optical power of the interface.

5

In a lens optical system, by correcting chromatic aberration by the use of both a
diffractive lens element and a combination of two, a positive and a negative, refractive
lens elements in such a way that Condition (2) is fulfilled, it is possible to realize a
lens optical system that offers the above-described advantages (A) and (B).

10

The lower limit of Condition (2) is significant in cases where the lens element
whose axial distance is represented by tp has a negative optical power. If the lower
limit of Condition (2) is exceeded, to give the lens element a sufficiently strong
optical power, the radii of curvature of the lens surfaces thereof need to be reduced.
This inconveniently increases the aberrations caused by those lens surfaces.

15

Accordingly, if the lower limit of Condition (2) is exceeded, it is essential to increase
the number of constituent lens elements in order to correct the resultant aberrations
properly. This leads to an undesirable increase in the manufacturing cost and the
size of the optical system.

20

The upper limit of Condition (2) is significant in cases where the lens element
whose axial distance is represented by tp has a positive optical power. If the upper
limit of Condition (2) is exceeded, to give the lens element sufficiently strong optical
power, the radii of curvature of the lens surfaces thereof need to be reduced. This

inconveniently increases the aberrations caused by those lens surfaces. Accordingly, if the upper limit of Condition (2) is exceeded, it is essential to increase the number of constituent lens elements in order to correct the resultant aberrations properly. This leads to an undesirable increase in the manufacturing cost and the size of the optical system.

Examples 1 to 4

Hereinafter, examples of lens optical systems embodying the present invention will be presented with reference to their construction data, graphic representations of aberrations, and other data. Tables 1 to 4 list the construction data of Examples 1 to 4, which respectively correspond to the first to fourth embodiments described above and have lens arrangements as shown in Figs. 1A to 1C, 2A to 2C, 3A to 3C, and 4. Moreover, Table 5 lists the construction data of an example taken up for comparison (Comparison Example 1), which corresponds to Example 1 and others and has a lens arrangement as shown in Figs. 5A to 5C.

In the construction data of each example, r_i ($i = 1, 2, 3, \dots$) represents the radius of curvature of the i th surface counted from the object side, d_i ($i = 1, 2, 3, \dots$) represents the i th axial distance counted from the object side, and N_i ($i = 1, 2, 3, \dots$) and v_i ($i = 1, 2, 3, \dots$) respectively represent the refractive index for the d line and the Abbe number of the i th optical element counted from the object side. Moreover, in the construction data, for each of the axial distances that vary with zooming (i.e. the variable axial distances), three values are given that are, from left, the axial aerial distance between the lens units at the wide-angle end [W] (i.e. in the shortest-focal-

length condition), the same distance at the middle focal length [M], and the same distance at the telephoto end [T] (i.e. in the longest-focal-length condition). Also listed are the focal length f , the half angle of view ω , and the F-number FNO of the entire lens optical system in the three focal-length conditions mentioned just above.

- 5 A surface whose radius of curvature r_i is marked with an asterisk (*) is an aspherical surface, whose surface shape is defined by Formula (AS) below. A surface whose radius of curvature r_i is marked with # is a surface formed as a diffractive optical surface, of which the phase shape of the pitch is defined by Formula (DS) below. Also listed together with the construction data are the aspherical surface data
- 10 of each aspherical surface, the diffractive optical surface data of each diffractive optical surface, and other data.

$$Z(H) = (C0 \cdot H^2) / (1 + \sqrt{1 - C0^2 \cdot H^2}) + (A4 \cdot H^4 + A6 \cdot H^6 + A8 \cdot H^8 + A10 \cdot H^{10}) \quad (AS)$$

15 where

$Z(H)$ represents the displacement along the optical axis at the height H (relative to the vertex);

H represents the height in a direction perpendicular to the optical axis;

20 $C0$ represents the paraxial curvature; and

A_i represents the aspherical coefficient of the ith order.

$$\phi(H) = (2\pi / \lambda_0) \cdot (C_1 \cdot H^2 + C_2 \cdot H^4) \quad (DS)$$

5 where

$\phi(H)$ represents the phase function;

H represents the height in a direction perpendicular to the optical axis;

C_i represents the phase function coefficient of the 2ⁱth order; and

10 λ_0 represents the design wavelength.

Figs. 6A to 6I are graphic representations of the aberrations observed in the lens optical system of Example 1; Figs. 7A to 7I are graphic representations of the aberrations observed in the lens optical system of Example 2; Figs. 8A to 8I are graphic representations of the aberrations observed in the lens optical system of Example 3; Figs. 9A to 9C are graphic representations of the aberrations observed in the lens optical system of Example 4; and Figs. 10A to 10I are graphic representations of the aberrations observed in the lens optical system of Comparison Example 1. Of all the above diagrams, Figs. 6A to 6C, 7A to 7C, 8A to 8C, and 10A to 10C show the aberrations observed at the wide-angle end [W]; Figs. 6D to 6F, 7D to 7F, 8D to 8F, and 10D to 10F show the aberrations observed at the middle focal length [M]; and Figs. 6G to 6I, 7G to 7I, 8G to 8I, and 10G to 10I show the aberrations observed at the telephoto

end [T]. Furthermore, of these diagrams, Figs. 6A, 6D, 6G, 7A, 7D, 7G, 8A, 8D, 8G, 9A, 10A, 10D, and 10G show spherical aberration; Figs. 6B, 6E, 6H, 7B, 7E, 7H, 8B, 8E, 8H, 9B, 10B, 10E, and 10H show astigmatism; and Figs. 6C, 6F, 6I, 7C, 7F, 7I, 8C, 8F, 8I, 9C, 10C, 10F, and 10I show distortion. In the spherical aberration diagrams, the
5 broken line represents the aberration for the C line (wavelength λ_C : 656. 3nm), the solid line represents the aberration for the d line (wavelength λ_d : 587. 6nm), and the dash-and-dot line represents the aberration for the g line (wavelength λ_g : 435. 8nm). For spherical aberration (taken along the horizontal axis and given as the deviation (mm) from the paraxial image plane along the optical axis), the value H/H_0 obtained by
10 normalizing the height of incidence with respect to the maximum height (i.e. the relative height at which the optical axis crosses the entrance-pupil plane) is taken along the vertical axis. For astigmatism (taken along the horizontal axis and given as the deviation (mm) from the paraxial image plane along the optical axis) and distortion (taken along the horizontal axis and given in %), the image height Y' (mm) is taken
15 along the vertical axis. In the astigmatism diagrams, the solid line X represents the astigmatism on the sagittal plane, and the solid line Y represents the astigmatism on the meridional plane.

Table 6 lists, for the diffraction grating employed in the lens optical system of each example, the grating height (h_0) and the minimum grating pitch (d_{min}) as well as
20 the blaze vertex angle (Θ) at the minimum grating pitch (d_{min}). In Examples 1 to 4, the light-diffraction action required is successfully minimized by correcting chromatic aberration by the use of both a diffractive lens element and a refractive lens element

having an optical power of the opposite sign to the light-diffraction action. This allows the minimum grating pitch (d_{\min}) and thus the blaze vertex angle (Θ) to be made relatively large. In contrast, in Comparison Example 1, the degree to which the diffractive lens element corrects chromatic aberration is relatively high. Therefore, to
5 obtain satisfactorily strong light-diffracting action as required, the minimum grating pitch (d_{\min}) and thus the blaze vertex angle (Θ) need to be made relatively small.

Table 7 lists the degree to which the diffractive lens element corrects chromatic aberration and the degree to which the refractive lens element having an optical power of the opposite sign to the light-diffracting action corrects chromatic aberration. The
10 larger the ratio of the value of (ϕ_p / v_d) in the refractive lens element to the value of (ϕ_{DOE} / v_{DOE}) in the diffractive lens element (that is, the greater the value of Condition (1)), the higher the degree to which the refractive lens element corrects chromatic aberration. From this, it will be understood that the degree to which the refractive lens element corrects chromatic aberration is higher in Example 1 than in
15 Comparison Example 1. Accordingly, by comparing the spherical aberration observed in Example 1 to that observed in Comparison Example 1, it will be understood that the spherical aberration for the g line (436nm) or the C line (656nm) (i.e. the secondary spectrum) is smaller in Example 1 than in Comparison Example 1.

Table 8 lists, for a cemented lens element having a diffraction grating, the ratio
20 of the axial distance of that one of its constituent refractive lens elements which has an optical power of the opposite sign to the diffractive lens element to the axial distance of that one of its constituent refractive lens elements which has an optical

power of the same sign as the diffractive lens element. If this ratio (i.e. the value of Condition (2)) is kept in an appropriate range, it is possible to strike a proper balance between the degree to which the diffractive lens element corrects chromatic aberration and the degree to which the refractive lens element having an optical power of the opposite sign to the light-diffraction action corrects chromatic aberration. This makes it possible to achieve proper correction of aberrations other than the secondary spectrum and chromatic aberration. By comparing Example 2 with Comparison Example 1, it will be understood that, even though the aberration correcting performance of these lens optical systems are substantially the same, the former requires fewer constituent lens elements than the latter.

As described heretofore, according to one aspect of the present invention, it is possible to achieve a lens optical system in which chromatic aberration is corrected properly by effective use of a diffractive lens element that offers high diffraction efficiency over a wide wavelength range. Moreover, according to another aspect of the present invention, it is possible to achieve a lens optical system in which chromatic aberration and the secondary spectrum are corrected properly by the use of a diffractive lens element that is easy to manufacture.

Embodiment 5

The lens optical system of the fifth embodiment is built as a three-unit zoom lens system that is composed of, from the object side, a first lens unit (Gr1) having a negative optical power, a second lens unit (Gr2) having a positive optical power, and a

third lens unit (Gr3) having a positive optical power, wherein zooming is performed by varying the distance between the first and second lens units (Gr1 and Gr2) and so forth. In this lens optical system, between the second and third lens units (Gr2 and Gr3), an aperture stop (S) is disposed that is kept in a fixed position together with the
5 third lens unit (Gr3) during zooming. Moreover, a low-pass filter (LPF) is disposed at the image-plane (I) side end of the lens optical system.

In the lens optical system of the fifth embodiment (Figs. 12A to 12C), the lens units are each composed, from the object side, as follows. The first lens unit (Gr1) is composed of a negative biconcave lens element and a positive meniscus lens element
10 convex to the object side. The second lens unit (Gr2) is composed of a cemented lens element formed by cementing together a positive biconvex lens element and a negative meniscus lens element concave to the object side, with a diffraction grating formed on its cementing surface (the sixth surface (r6)). In this way, to achieve proper correction of chromatic aberration, it is preferable that the second lens unit (Gr2) be provided with
15 a cementing surface and that a diffraction grating be formed on the cementing surface. Moreover, to make this zoom-type lens optical system satisfactorily compact, it is preferable to provide a diffraction grating in the second lens unit (Gr2) from the viewpoint of aberration correction. This will be described in detail later. The third lens unit (Gr3) is composed of a positive meniscus lens element convex to the object
20 side, a negative meniscus lens element concave to the object side, and a positive biconvex lens element.

Next, the conditions will be described that are preferably fulfilled by a lens

optical system as exemplified by the fifth embodiment, i.e. a zoom-type lens optical system having three lens units that are a negative, a positive, and a positive lens unit, wherein a diffraction grating is disposed in the second lens unit (Gr2). Note that it is not necessary that all of the conditions given below be fulfilled simultaneously; if any
5 of those conditions is fulfilled, it is possible to achieve the corresponding advantages. It is needless to say, however, that more than one condition should preferably be fulfilled to obtain satisfactory results in terms of optical performance, miniaturization, and so forth.

It is preferable that the diffraction grating fulfill Condition (3) below.

$$0.005 < \phi_{\text{doe}} / \phi_{\text{gr2}} < 0.03 \quad (3)$$

wherein

ϕ_{doe} represents the optical power of the diffraction grating; and

ϕ_{gr2} represents the optical power of the second lens unit (Gr2).

Condition (3) defines the preferable ratio of the optical power ϕ_{doe} of the
20 diffraction grating to the optical power ϕ_{gr2} of the second lens unit (Gr2) (which includes the optical power ϕ_{doe}). Fulfillment of Condition (3) makes it possible to

achieve a satisfactorily compact lens optical system. If the value of Condition (3) is less than its lower limit, the diffractive lens element does not serve to correct chromatic aberration, and thus the lens optical system as a whole becomes unduly large. In contrast, if the value of Condition (3) is greater than its upper limit, the
5 diffractive lens element causes unduly large astigmatism and thus does not serve to correct astigmatism. In this case, correction of astigmatism cannot be achieved without making the lens optical system as a whole unduly large.

It is preferable that the diffraction grating fulfill at least one of Conditions (4) and (5) below.

10

$$0.1 < tW / fW < 0.4 \quad (4)$$

$$0.4 < tT / fT < 1.2 \quad (5)$$

wherein

15

tW represents the axial distance, as converted into an aerial distance, between the diffraction grating and the aperture stop (S) at the wide-angle end [W];

tT represents the axial distance, as converted into an aerial distance, between the diffraction grating and the aperture stop (S) at the telephoto end [T];

20

fW represents the focal length of the entire zoom lens system at the wide-angle end [W]; and

fT represents the focal length of the entire zoom lens system at the telephoto end

[T].

Fulfillment of Conditions (4) or (5) or both makes it possible to achieve a lens optical system that corrects chromatic aberration properly. If the value of Condition (4) is less than its lower limit, it is impossible to hold the lens units in position. In contrast, if the value of Condition (4) is greater than its upper limit, longitudinal chromatic aberration is undercorrected at the wide-angle end [W]. On the other hand, if the value of Condition (5) is less than its lower limit, lateral chromatic aberration is undercorrected at the telephoto end [T]. In contrast, if the value of Condition (5) is greater than its upper limit, the lens optical system as a whole becomes unduly large.

It is preferable that Condition (6) below be fulfilled. Fulfillment of Condition (6) makes it possible to keep within an acceptable range the loss of brightness as occurs at the edge of image frame when an image sensor is used.

$$| Y'_{\max} / PZ | < 0.4 \quad (6)$$

wherein

Y'_{\max} represents the maximum image height; and

PZ represents the distance from the image plane (I) to the exit pupil.

Example 5

Hereinafter, an example of a lens optical system embodying the present invention will be presented with reference to its construction data, graphic representations of aberrations, and other data. Table 9 lists the construction data of Example 5, which corresponds to the fifth embodiment described above and has a lens arrangement as shown in Figs. 12A, 12B, and 12C. Table 10 lists the construction data of Comparison Example 2, which corresponds to Example 5 but has a lens arrangement as shown in Figs. 14A, 14B, and 14C (i.e. having no diffraction grating).

In the construction data of each example, r_i ($i = 1, 2, 3, \dots$) represents the radius of curvature of the i th surface counted from the object side, d_i ($i = 1, 2, 3, \dots$) represents the i th axial distance counted from the object side, and N_i ($i = 1, 2, 3, \dots$) and v_i ($i = 1, 2, 3, \dots$) respectively represent the refractive index for the d line and the Abbe number of the i th optical element counted from the object side. Moreover, in the construction data, for each of the axial distances that vary with zooming (i.e. the variable axial distances), three values are given that are, from left, the axial distance between the lens units at the wide-angle end [W] (i.e. in the shortest-focal-length condition), the same distance at the middle focal length [M], and the same distance at the telephoto end [T] (i.e. in the longest-focal-length condition). Also listed are the focal length f , the half angle of view ω ($^\circ$), and the F-number FNO of the entire lens optical system in the three focal-length conditions [W], [M], and [T] mentioned just above, and the values corresponding to Conditions noted above.

A surface whose radius of curvature r_i is marked with an asterisk (*) is an aspherical surface, whose surface shape is defined by Formula (as) below. A surface

whose radius of curvature r_i is marked with # is a diffractive lens surface, i.e. a lens surface having a diffraction grating formed thereon, of which the phase shape of the pitch is defined by Formula (ds) below. Also listed together are the aspherical surface data of each aspherical surface, the diffractive surface data of each diffractive lens surface, and other data.

Formula (as) provides that:

$$Z(H) = (C_0 \cdot H^2) / \{1 + \sqrt{1 - C_0^2 \cdot H^2}\} + (A \cdot H^4 + B \cdot H^6 + C \cdot H^8 + D \cdot H^{10}) \quad (\text{as})$$

wherein

$Z(H)$ represents the displacement along the optical axis at a height H (relative to the vertex);

H represents the height with respect to the optical axis (i.e. the height in a direction perpendicular to the optical axis);

C_0 represents the paraxial curvature; and

A , B , C , and D represent the aspherical coefficients.

Formula (ds) provides that:

$$\Phi(H) = (2\pi / \lambda_0) \cdot (C_1 \cdot H^2 + C_2 \cdot H^4 + C_3 \cdot H^6) \quad (\text{ds})$$

wherein

$\Phi(H)$ represents the phase function;

H represents the height with respect to the optical axis (i.e. the height in a
5 direction perpendicular to the optical axis);

λ_0 represents the design wavelength; and

C1, C2, and C3 represent the phase function coefficients.

The lens optical system of Comparison Example 2 is built as a three-unit zoom
10 lens system of a negative-positive-positive configuration. In this lens optical system,
each of the lens units is composed as follows. The first lens unit (Gr1) is composed
of two lens elements that are a negative lens element and a positive lens element.
The second lens unit (Gr2) is composed of two lens elements that are a positive lens
element and a negative lens element. The third lens unit (Gr3) is composed of three
15 lens elements that are a positive lens element, a negative lens element, and a positive
lens element. Table 11 lists the chromatic aberration coefficients of the entire lens
optical system, as well as of the individual lens units (Gr1, Gr2, and Gr3) thereof, of
Comparison Example 2, as observed at the wide-angle end [W] and the telephoto end [T]
(note that LC represents the longitudinal chromatic aberration coefficient and TC
20 represents the lateral chromatic aberration coefficient). In Comparison Example 2, as
will be understood from the chromatic aberration coefficients of the entire lens optical
system listed in Table 11, at the wide angle end [W], the longitudinal chromatic

aberration coefficient LC and the lateral chromatic aberration coefficient TC take great positive values, and, at the telephoto end [T], the lateral chromatic aberration coefficient TC takes a great negative value. Now, how chromatic aberration is corrected in the lens optical system of Comparison Example 2 if a diffractive lens element is provided in the first, second, or third lens unit (Gr1, Gr2, and Gr3) will be described.

Assume that a diffractive lens element is provided in the first lens unit (Gr1) of the lens optical system of Comparison Example 2. In this lens optical system, the first lens unit (Gr1) is disposed away from the aperture stop (S) on the front side thereof, and therefore the lateral chromatic aberration coefficient TC takes a great value. However, in Comparison Example 2, the lateral chromatic aberration coefficient TC changes from positive to negative over the range from the wide-angle end [W] to the telephoto end [T]. Thus, because of the lateral chromatic aberration coefficient TC produced by the diffractive lens element included in the first lens unit (Gr1), the lateral chromatic aberration coefficient TC of the entire lens optical system cannot be made to decrease gradually over the range from the wide-angle end [W] to the telephoto end [T]. Accordingly, it is not preferable to provide a diffractive lens element in the first lens unit (Gr1).

Assume that a diffractive lens element is provided in the second lens unit (Gr2) of the lens optical system of Comparison Example 2. In this case, the lens arrangement of Comparison Example 2 corresponds to the lens arrangement of Example 5. Table 12 lists, as Table 11 does, the chromatic aberration coefficients of the entire lens optical system, as well as of the individual lens units (Gr1, Gr2, and Gr3)

thereof, of Example 5, as observed at the wide angle end [W] and the telephoto end [T]. Note that, here, for the second lens unit (Gr2), two sets of values are given, with the chromatic aberration coefficients of the entire second lens unit (Gr2) listed in the left-hand column and the chromatic aberration coefficients produced by the diffractive lens element included therein listed in the right-hand column.

In this lens optical system, the second lens unit (Gr2) is disposed immediately in front of the aperture stop (S) at the wide-angle end [W], and is disposed away from the aperture stop (S) on the front side thereof at the telephoto end [T]. Thus, at the wide-angle end [W], the longitudinal chromatic aberration coefficient LC takes a great value, and, at the telephoto end [T], the lateral chromatic aberration coefficient TC takes a great value. Accordingly, the negative longitudinal chromatic aberration coefficient LC produced by the diffractive lens element included in the second lens unit (Gr2) at the wide-angle end [W] acts to reduce effectively the longitudinal chromatic aberration coefficient LC of the entire lens optical system at the wide-angle end [W]. In addition, the positive lateral chromatic aberration coefficient TC of the diffractive lens element included in the second lens unit (Gr2) at the telephoto end [T] acts to reduce effectively the lateral chromatic aberration coefficient TC of the entire lens optical system at the telephoto end [T].

Assume that a diffractive lens element is provided in the third lens unit (Gr3) of the lens optical system of Comparison Example 2. In this lens optical system, since the third lens unit (Gr3) is disposed immediately behind the aperture stop (S), the longitudinal chromatic aberration coefficient LC takes a great value. Accordingly, the

negative longitudinal chromatic aberration coefficient LC produced by the diffractive lens element included in the third lens unit (Gr3) at the wide-angle end [W] acts to reduce effectively the longitudinal chromatic aberration coefficient LC of the entire lens optical system at the wide-angle end [W]. In the light of the foregoing, it will be understood that it is preferable to provide a diffractive lens element in the second lens unit (Gr2) and that the diffractive lens element exhibits the greatest chromatic aberration correction effect when provided in the second lens unit (Gr2).

Next, the astigmatism and the Petzval effect observed when a diffractive lens element is used will be described. Here, the following three models (a), (b), and (c) of a diffractive lens element, i.e. an optical system composed of a thin lens element, as shown in Figs. 16A, 16B, and 16C, respectively, will be considered.

(a) a cemented lens element formed by cementing together a positive and a negative lens element;

(b) a cemented lens element formed by cementing together a positive and a negative lens element, with a diffractive lens surface (indicated by a broken line) formed on its cementing surface; and

(c) a single positive lens element having a diffractive lens surface (indicated by a broken line) formed thereon.

In the model (a), chromatic aberration is corrected by the combination of the positive and negative lens elements. In the model (b), chromatic aberration is corrected by the combination of the positive and negative lens elements and also by the diffractive lens surface. In the model (c), chromatic aberration is corrected solely by the diffractive

lens surface. The relationship among these models (a), (b), and (c) in terms of the degree to which they, acting as diffractive lens elements, correct chromatic aberration is given as : (a) < (b) < (c). Thus, the relationship among those models (a), (b), and (c) in terms of the power they exert as diffractive lens elements is also given as : (a) < (b) <

5 (c). Accordingly, the diffractive lens element of the model (c), which corrects chromatic aberration to the highest degree, exerts the strongest optical power.

In Comparison Example 2, the second lens unit (Gr2) is composed of a positive and a negative lens element. The positive lens element is made of a glass material that has a relatively low refractive index and a relatively low dispersion. The
10 negative lens element is made of a glass material that has a relatively high refractive index and a relatively high dispersion. Correspondingly, it is assumed that the cemented lens element constituting the models (a) and (b) employs a positive lens element made of a glass material that has a relatively low refractive index and a relatively low dispersion, and a negative lens element made of a glass material that has
15 a relatively high refractive index and a relatively high dispersion. Table 13 lists the data of the glass materials employed here (note that nd represents the refractive index for the d line and vd represents the Abbe number).

Table 14 lists the aberration coefficients of the optical system as a whole of the models (a), (b), and (c) (note that PT represents a Petzval coefficient and AS represents
20 an astigmatism coefficient). In Comparison Example 2, the second lens unit (Gr2) is disposed on the front side of the aperture stop (S). Correspondingly, the aberration coefficients are calculated on the assumption that the models (a), (b), or (c) is disposed

on the front side of the aperture stop (S). Moreover, the aberration coefficients of the models (a), (b), and (c) are calculated on the assumption that the lens surfaces are given curvatures (bending) such that the spherical aberration coefficients of the entire optical system is minimized. As will be understood from Table 14, the stronger the optical power of the diffractive lens element, the smaller the Petzval coefficient PT. On the other hand, the weaker (or the stronger) the optical power of the diffractive lens element, the greater the astigmatism coefficient AS; that is, the astigmatism coefficient AS is at its minimum when the diffractive lens element has a predetermined optical power.

Table 15 lists the Petzval coefficients PT and the astigmatism coefficients AS as observed in Comparison Example 2 and Example 5 (an optical system having a diffractive lens element disposed in its second lens unit (Gr2)). These two optical systems are designed to have such sizes as to offer equivalent lens performance. As will be understood from Table 15, in Comparison Example 2, at the telephoto end [T], the astigmatism coefficient AS takes a great positive value; in contrast, in Example 5, the diffractive lens element included in the second lens unit (Gr2) serves to reduce the astigmatism coefficient AS of that lens unit.

As will be understood from the foregoing, with a lens optical system employing a diffractive lens element, how compact it can be made depends on the balance between the effect of chromatic aberration correction and the effects of the Petzval sum and astigmatism. Moreover, by providing a diffractive lens element in the second lens unit (Gr2) of a zoom-type lens optical system having three lens units that are a negative, a positive, and a positive lens unit, like that of Example 5, it is possible to

achieve a satisfactorily compact lens optical system, thanks to the effect of chromatic aberration correction.

Figs. 13A to 13I are graphic representations of the aberrations observed in the lens optical system of Example 5, and Figs. 15A to 15I are graphic representations of the aberrations observed in the lens optical system of Comparison Example 2. Of these diagrams, Figs. 13A, 13B, 13C, 15A, 15B, and 15C show the aberrations observed at the wide-angle end [W]; Figs. 13D, 13E, 13F, 15D, 15E, and 15F show the aberrations observed at the middle focal length [M]; and Figs. 13G, 13H, 13I, 15G, 15H, and 15I show the aberrations observed at the telephoto end [T]. Furthermore, of these diagrams, Figs. 13A, 13D, 13G, 15A, 15D, and 15G show spherical aberration; Figs. 13B, 13E, 13H, 15B, 15E, and 15H show astigmatism; and Figs. 13C, 13F, 13I, 15C, 15F, and 15I show distortion. In the spherical aberration diagrams, the value H/H_0 obtained by normalizing the height H at which a light ray enters the entrance pupil with respect to the maximum height H_0 ($=1$) (i.e. the relative height at which the light ray crosses the entrance-pupil plane) is taken along the vertical axis, and the deviation (mm) from the paraxial imaging position along the optical axis is taken along the horizontal axis. In addition, the broken line represents the spherical aberration for the C line (wavelength λ_C : 656. 3nm), the solid line represents the spherical aberration for the d line (wavelength λ_d : 587. 6nm), and the dash-and-dot line represents the spherical aberration for the g line (wavelength λ_g : 435. 8nm). In the astigmatism diagrams, the image height Y' (mm) is taken along the vertical axis, and the deviation (mm) from the paraxial imaging position along the optical axis is taken along the

horizontal axis. In addition, the solid line X represents the astigmatism on the sagittal plane, and the solid line Y represents the astigmatism on the meridional plane. In the distortion diagrams, the image height Y' (mm) is taken along the vertical axis, and the amount of distortion (%) is taken along the horizontal axis.

5

Embodiment 6

The lens optical system of the sixth embodiment is built as a three-unit zoom lens system that is composed of, from the object side, a first lens unit (Gr1) having a positive optical power, a second lens unit (Gr2) having a negative optical power, and a
10 third lens unit (Gr3) having a positive optical power, wherein zooming is performed by varying the distance between the first and second lens units (Gr1 and Gr2) and so forth. In this lens optical system, between the second and third lens units (Gr2 and Gr3), an aperture stop (S) is disposed that moves together with the third lens unit (Gr3) during zooming. Moreover, a low-pass filter (LPF) is disposed at the image-
15 plane (I) side end of the lens optical system.

In the lens optical system of the sixth embodiment (Figs. 17A to 17C), the lens units are each composed, from the object side, as follows. The first lens unit (Gr1) is composed of a cemented lens element formed by cementing together a negative meniscus lens element convex to the object side and a positive meniscus lens element
20 convex to the object side. The second lens unit (Gr2) is composed of a negative meniscus lens element concave to the image side and a cemented lens element formed by cementing together a positive biconvex lens element and a negative biconcave lens

element. The third lens unit (Gr3) is composed of a positive biconvex lens element and a negative meniscus lens element concave to the object side, with a diffraction grating formed on its eleventh surface (r11). In order to make this zoom-type lens optical system satisfactorily compact, it is preferable to provide a diffraction grating in the third lens unit (Gr3) from the viewpoint of aberration correction. This will be described in detail later.

Next, the conditions will be described that are preferably fulfilled by a lens optical system as exemplified by the sixth embodiment, i.e. a zoom-type lens optical system having three lens units that are a positive, a negative, and a positive lens unit, wherein a diffraction grating is disposed in the third lens unit (Gr3). Note that it is not necessary that all of the conditions given below be fulfilled simultaneously; if any of those conditions is fulfilled, it is possible to achieve the corresponding advantages. It is needless to say, however, that more than one condition should preferably be fulfilled to obtain satisfactory results in terms of optical performance, miniaturization, and so forth.

It is preferable that the diffraction grating fulfill Condition (7) below.

$$0.01 < \phi_{\text{doe}} / \phi_{\text{gr3}} < 0.04 \quad (7)$$

wherein

ϕ_{doe} represents the optical power of the diffraction grating; and

ϕ_{gr3} represents the optical power of the third lens unit (Gr2).

Condition (7) defines the preferable ratio of the optical power ϕ_{doe} of the
5 diffraction grating to the optical power ϕ_{gr3} of the third lens unit (Gr3) (which
includes the optical power ϕ_{doe}). Fulfillment of Condition (7) makes it possible to
achieve a satisfactorily compact lens optical system. If the value of Condition (7) is
less than its lower limit, the diffractive lens element does not serve to correct
chromatic aberration, and thus the lens optical system as a whole becomes unduly
10 large. In contrast, if the value of Condition (7) is greater than its upper limit, the
diffractive lens element causes unduly large astigmatism. In this case, correction of
astigmatism cannot be achieved without making the lens optical system as a whole
unduly large.

It is preferable that the diffraction grating fulfill Condition (8) below.
15 Fulfillment of Condition (8) makes it possible to achieve a lens optical system that
corrects chromatic aberration properly. If the value of Condition (8) is less than its
lower limit, it is impossible to hold the lens units in position. In contrast, if the value
of Condition (8) is greater than its upper limit, longitudinal chromatic aberration is
undercorrected at the wide-angle end [W].

20

$$0.1 < tW / fW < 0.6 \quad (8)$$

Hereinafter, an example of a lens optical system embodying the present invention will be presented with reference to its construction data, graphic representations of aberrations, and other data. Table 16 lists the construction data of Example 6, which corresponds to the sixth embodiment described above and has a lens arrangement as shown in Figs. 17A, 17B, and 17C. Table 17 lists the construction data of Comparison Example 3, which corresponds to Example 6 but has a lens arrangement as shown in Figs. 19A, 19B, and 19C (i.e. having no diffraction grating).

In the construction data of each example, r_i ($i = 1, 2, 3, \dots$) represents the radius of curvature of the i th surface counted from the object side, d_i ($i = 1, 2, 3, \dots$) represents the i th axial distance counted from the object side, and N_i ($i = 1, 2, 3, \dots$) and v_i ($i = 1, 2, 3, \dots$) respectively represent the refractive index for the d line and the Abbe number of the i th optical element counted from the object side. Moreover, in the construction data, for each of the axial distances that vary with zooming (i.e. the variable axial distances), three values are given that are, from left, the axial distance between the lens units at the wide-angle end [W] (i.e. in the shortest-focal-length condition), the same distance at the middle focal length [M], and the same distance at the telephoto end [T] (i.e. in the longest-focal-length condition). Also listed are the focal length f , the half angle of view ω ($^\circ$), and the F-number FNO of the entire lens optical system in the three focal-length conditions [W], [M], and [T] mentioned just above, and the values corresponding to Conditions noted above.

A surface whose radius of curvature r_i is marked with an asterisk (*) is an

aspherical surface, whose surface shape is defined by Formula (as) noted previously. A surface whose radius of curvature r_i is marked with # is a diffractive lens surface, i.e. a lens surface having a diffraction grating formed thereon, of which the phase shape of the pitch is defined by Formula (ds) noted previously. Also listed together
5 are the aspherical surface data of each aspherical surface, the diffractive surface data of each diffractive lens surface, and other data.

The lens optical system of Comparison Example 3 is built as a three-unit zoom lens system of a positive-negative-positive configuration. In this lens optical system, the lens units are each composed as follows. The first lens unit (Gr1) is composed of
10 two lens elements that are a negative lens element and a positive lens element. The second lens unit (Gr2) is composed of three lens elements that are a negative lens element, a positive lens element, and a negative lens element. The third lens unit (Gr3) is composed of two lens elements that are a positive lens element and a negative lens element. Table 18 lists the chromatic aberration coefficients of the entire lens
15 optical system, as well as of the individual lens units (Gr1, Gr2, and Gr3) thereof, of Comparison Example 3, as observed at the wide angle end [W] and the telephoto end [T] (note that LC represents the longitudinal chromatic aberration coefficient, and TC represents the lateral chromatic aberration coefficient). In Comparison Example 3, as will be understood from the chromatic aberration coefficients of the entire lens optical
20 system listed in Table 18, at the wide angle end [W], the longitudinal chromatic aberration coefficient LC and the lateral chromatic aberration coefficient TC take great positive values, and, at the telephoto end [T], the lateral chromatic aberration coefficient

TC takes a great positive value. Now, how chromatic aberration is corrected in the lens optical system of Comparison Example 3 if a diffractive lens element is provided in the first, second, or third lens unit (Gr1, Gr2, and Gr3) will be described.

Assume that a diffractive lens element is provided in the first lens unit (Gr1) of the lens optical system of Comparison Example 3. In this lens optical system, since the first lens unit (Gr1) is disposed away from the aperture stop (S) on the front side thereof, the lateral chromatic aberration coefficient TC takes a great value. If, to correct this, a diffractive lens element which produces a negative lateral chromatic aberration coefficient TC is provided in the first lens unit (Gr1), the diffractive lens element will cause a positive longitudinal chromatic aberration coefficient LC. Even though this positive longitudinal chromatic aberration coefficient LC is small, it increases the longitudinal chromatic aberration coefficients LC of the entire lens optical system in the positive direction. Accordingly, it is not preferable to provide a diffractive lens element in the first lens unit (Gr1).

Assume that a diffractive lens element is provided in the second lens unit (Gr2) of the lens optical system of Comparison Example 3. In this lens optical system, the second lens unit (Gr2) is disposed away from the aperture stop (S) on the front side thereof at the wide-angle end [W], and is disposed immediately in front of the aperture stop (S) at the telephoto end [T]. Thus, at the wide-angle end [W], the lateral chromatic aberration coefficient TC takes a great value, and, at the telephoto end [T], the longitudinal chromatic aberration coefficient LC takes a great value. In Comparison Example 3, both the lateral chromatic aberration coefficient TC observed at the wide-

angle end [W] and the longitudinal chromatic aberration coefficient LC observed at the telephoto end [T] bear a positive sign. In the diffractive lens element included in the second lens unit (Gr2), however, the longitudinal chromatic aberration coefficient LC and the lateral chromatic aberration coefficients TC bear opposite signs and are thus
5 expected to be irreconcilable with each other. Accordingly, it is not preferable to provide a diffractive lens element in the second lens unit (Gr2).

Assume that a diffractive lens element is provided in the third lens unit (Gr3) of the lens optical system of Comparison Example 3. In this case, the lens arrangement of Comparison Example 3 corresponds to the lens arrangement of Example 6. Table
10 19 lists, as Table 18 does, the chromatic aberration coefficients of the entire lens optical system, as well as of the individual lens units (Gr1, Gr2, and Gr3) thereof, of Example 6, as observed at the wide angle end [W] and the telephoto end [T]. Note that, here, for the third lens unit (Gr3), two sets of values are given, with the chromatic aberration coefficients of the entire third lens unit (Gr3) listed in the left-hand column and the
15 chromatic aberration coefficients produced by the diffractive lens element included therein listed in the right-hand column.

Since the third lens unit (Gr3) is disposed immediately behind the aperture stop (S), the longitudinal chromatic aberration coefficient LC takes a great value. Accordingly, the negative longitudinal chromatic aberration coefficient LC produced by
20 the diffractive lens element included in the third lens unit (Gr3) at the wide-angle end [W] acts to reduce effectively the longitudinal chromatic aberration coefficient LC of the entire lens optical system at the wide-angle end [W]. Moreover, in Example 6, both the

longitudinal chromatic aberration coefficient LC observed at the wide-angle end [W] and the lateral chromatic aberration coefficient TC observed at the telephoto end [T] are reduced. In the light of the foregoing, it will be understood that it is preferable to provide a diffractive lens element in the third lens unit (Gr3) and that the diffractive lens element exhibits the greatest chromatic aberration correction effect when provided in the third lens unit (Gr3).

Next, the astigmatism and the Petzval effect observed when a diffractive lens element is used will be described. Here, the following three models (a), (b), and (c) of a diffractive lens element, i.e. an optical system composed of a thin lens element, as shown in Figs. 21A, 21B, and 21C, respectively, will be considered.

(a) a cemented lens element formed by cementing together a positive and a negative lens element;

(b) a cemented lens element formed by cementing together a positive and a negative lens element, with a diffractive lens surface (indicated by a broken line) formed on its cementing surface; and

(c) a single positive lens element having a diffractive lens surface (indicated by a broken line) formed thereon.

In the model (a), chromatic aberration is corrected by the combination of the positive and negative lens elements. In the model (b), chromatic aberration is corrected by the combination of the positive and negative lens elements and also by the diffractive lens surface. In the model (c), chromatic aberration is corrected solely by the diffractive lens surface. The relationship among these models (a), (b), and (c) in terms of the

degree to which they, acting as diffractive lens elements, correct chromatic aberration is given as : (a) < (b) < (c). Thus, the relationship among those models (a), (b), and (c) in terms of the power they exert as diffractive lens elements is also given as : (a) < (b) < (c). Accordingly, the diffractive lens element of the model (c), which corrects
5 chromatic aberration to the highest degree, exerts the strongest optical power.

In Comparison Example 3, the third lens unit (Gr3) is composed of a positive and a negative lens element. The positive lens element is made of a glass material that has a relatively low refractive index and a relatively low dispersion. The negative lens element is made of a glass material that has a relatively high refractive index and
10 a relatively high dispersion. Correspondingly, it is assumed that the cemented lens element constituting the models (a) and (b) employs a positive lens element made of a glass material that has a relatively low refractive index and a relatively low dispersion, and a negative lens element made of a glass material that has a relatively high refractive index and a relatively high dispersion. Table 20 lists the data of the glass
15 materials employed here (note that nd represents the refractive index for the d line and vd represents the Abbe number).

Table 21 lists the aberration coefficients of the optical system as a whole of the models (a), (b), and (c) (note that PT represents a Petzval coefficient and AS represents an astigmatism coefficient). In Comparison Example 3, the third lens unit (Gr3) is
20 disposed behind the aperture stop (S). Correspondingly, the aberration coefficients are calculated on the assumption that the models (a), (b), or (c) is disposed behind the aperture stop (S). Moreover, the aberration coefficients of the models (a), (b), and (c) are

calculated on the assumption that the lens surfaces are given curvatures (bending) such that the spherical aberration coefficients of the entire optical system is minimized. As will be understood from Table 21, the stronger the optical power of the diffractive lens element, the smaller the Petzval coefficient PT and the greater the astigmatism coefficient AS.

Table 22 lists the Petzval coefficients PT and the astigmatism coefficients AS as observed in Comparison Example 3 and Example 6 (an optical system having a diffractive lens element disposed in its third lens unit (Gr3)). These two optical systems are designed to have such sizes as to offer equivalent lens performance. As will be understood from Table 22, in Comparison Example 3, at the wide-angle end [W], the astigmatism coefficient AS takes a great positive value. On the other hand, by giving a strong optical power to the diffractive lens element included in the third lens unit (Gr3), it is possible to obtain the effect of chromatic aberration correction, but simultaneously the astigmatism coefficient AS takes an unduly great value.

As will be understood from the foregoing, with a lens optical system employing a diffractive lens element, how compact it can be made depends on the balance between the effect of chromatic aberration correction and the effects of the Petzval sum and astigmatism. Moreover, by providing a diffractive lens element in the third lens unit (Gr3) of a zoom-type lens optical system having three lens units that are a positive, a negative, and a positive lens unit, like that of Example 6, it is possible to achieve a satisfactorily compact lens optical system, thanks to the effect of chromatic aberration correction.

Figs. 18A to 18I are graphic representations of the aberrations observed in the lens optical system of Example 6, and Figs. 20A to 20I are graphic representations of the aberrations observed in the lens optical system of Comparison Example 3. Of these diagrams, Figs. 18A, 18B, 18C, 20A, 20B, and 20C show the aberrations observed at the wide-angle end [W]; Figs. 18D, 18E, 18F, 20D, 20E, and 20F show the aberrations observed at the middle focal length [M]; and Figs. 18G, 18H, 18I, 20G, 20H, and 20I show the aberrations observed at the telephoto end [T]. Furthermore, of these diagrams, Figs. 18A, 18D, 18G, 20A, 20D, and 20G show spherical aberration; Figs. 18B, 18E, 18H, 20B, 20E, and 20H show astigmatism; and Figs. 18C, 18F, 18I, 20C, 20F, and 20I show distortion. In the spherical aberration diagrams, the value H/H_0 obtained by normalizing the height H at which a light ray enters the entrance pupil with respect to the maximum height H_0 ($=1$) (i.e. the relative height at which the light ray crosses the entrance-pupil plane) is taken along the vertical axis, and the deviation (mm) from the paraxial imaging position along the optical axis is taken along the horizontal axis. In addition, the broken line represents the spherical aberration for the C line (wavelength λ_C : 656. 3nm), the solid line represents the spherical aberration for the d line (wavelength λ_d : 587. 6nm), and the dash-and-dot line represents the spherical aberration for the g line (wavelength λ_g : 435. 8nm). In the astigmatism diagrams, the image height Y' (mm) is taken along the vertical axis, and the deviation (mm) from the paraxial imaging position along the optical axis is taken along the horizontal axis. In addition, the solid line X represents the astigmatism on the sagittal plane, and the solid line Y represents the astigmatism on the meridional plane. In the

distortion diagrams, the image height Y' (mm) is taken along the vertical axis, and the amount of distortion (%) is taken along the horizontal axis.

Embodiments 7 to 10

- 5 The lens optical systems of the seventh and eighth embodiments are each built as a four-unit zoom lens system that is composed of, from the object side, a first lens unit (Gr1) having a positive optical power, a second lens unit (Gr2) having a negative optical power, a third lens unit (Gr3) having a positive optical power, and a fourth lens unit (Gr4) having a positive optical power. The lens optical system of the ninth
- 10 embodiment is built as a five-unit zoom lens system that is composed of, from the object side, a first lens unit (Gr1) having a positive optical power, a second lens unit (Gr2) having a negative optical power, a third lens unit (Gr3) having a positive optical power, a fourth lens unit (Gr4) having a positive optical power, and a fifth lens unit (Gr5) having a negative optical power. The lens optical system of the tenth
- 15 embodiment is built as a five-unit zoom lens system that is composed of, from the object side, a first lens unit (Gr1) having a positive optical power, a second lens unit (Gr2) having a negative optical power, a third lens unit (Gr3) having a positive optical power, a fourth lens unit (Gr4) having a negative optical power, and a fifth lens unit (Gr5) having a positive optical power.
- 20 In any of the seventh to tenth embodiments, the lens optical system is built as a zoom-type lens optical system having four lens units that are a positive, a negative, a positive, and a positive (or a negative) lens unit and having a diffraction grating

disposed in its third lens unit (Gr3), wherein zooming is performed by varying the distance between the first and second lens units (Gr1 and Gr2), the distance between the third and fourth lens units (Gr3 and Gr4), and so forth. Moreover, in this lens optical system, between the second lens unit (Gr2) and the third lens unit (Gr3), an aperture stop (S) is disposed that moves together with the third lens unit (Gr3) during zooming. In addition, a low-pass filter (LPF) is disposed at the image-plane (I) side end of the lens optical system.

In the lens optical system of the seventh embodiment (Figs. 22A to 22C), the lens units are each composed, from the object side, as follows. The first lens unit (Gr1) is composed of a cemented lens element formed by cementing together a negative meniscus lens element concave to the image side and a positive biconvex lens element, and a positive meniscus lens element convex to the object side. The second lens unit (Gr2) is composed of a negative meniscus lens element concave to the image side and a cemented lens element formed by cementing together a negative biconcave lens element and a positive biconvex lens element. The third lens unit (Gr3) is composed of a cemented lens element formed by cementing together a positive meniscus lens element convex to the object side and a negative meniscus lens element concave to the image side, with a diffraction grating formed on its fourteenth surface (r14). The fourth lens unit (Gr4) is composed of a positive biconvex lens element and a negative biconcave lens element.

In the lens optical system of the eighth embodiment (Figs. 24A to 24C), the lens units are each composed, from the object side, as follows. The first lens unit (Gr1) is

composed of a negative meniscus lens element concave to the image side and a positive biconvex lens element. The second lens unit (Gr2) is composed of a negative meniscus lens element concave to the image side and a cemented lens element formed by cementing together a negative biconcave lens element and a positive meniscus lens element convex to the object side, with a diffraction grating formed on its eighth surface (r8). The third lens unit (Gr3) is composed of a cemented lens element formed by cementing together two positive meniscus lens elements convex to the object side, with a diffraction grating formed on its twelfth surface (r12). The fourth lens unit (Gr4) is composed of a positive biconvex lens element and a negative meniscus lens element concave to the image side.

In the lens optical system of the ninth embodiment (Figs. 26A to 26C), the lens units are each composed, from the object side, as follows. The first lens unit (Gr1) is composed of a cemented lens element formed by cementing together a negative meniscus lens element concave to the image side and a positive biconvex lens element, and a positive meniscus lens element convex to the object side. The second lens unit (Gr2) is composed of a negative meniscus lens element concave to the image side and a cemented lens element formed by cementing together a negative biconcave lens element and a positive meniscus lens element convex to the object side. The third lens unit (Gr3) is composed of a cemented lens element formed by cementing together a positive meniscus lens element convex to the object side and a negative meniscus lens element concave to the image side, with a diffraction grating formed on its fourteenth surface (r14). The fourth lens unit (Gr4) is composed of a positive

biconvex lens element and a negative biconcave lens element. The fifth lens unit (Gr5) is composed of a negative meniscus lens element concave to the object side.

In the lens optical system of the tenth embodiment (Figs. 28A to 28C), the lens units are each composed, from the object side, as follows. The first lens unit (Gr1) is
5 composed of a cemented lens element formed by cementing together a negative meniscus lens element concave to the image side and a positive biconvex lens element, and a positive meniscus lens element convex to the object side. The second lens unit (Gr2) is composed of a negative meniscus lens element concave to the image side and a cemented lens element formed by cementing together a negative biconcave lens
10 element and a positive meniscus lens element convex to the object side. The third lens unit (Gr3) is composed of a cemented lens element formed by cementing together a positive biconvex lens element and a negative biconcave lens element, with a diffraction grating formed on its fourteenth surface (r14). The fourth lens unit (Gr4) is composed of a negative meniscus lens element concave to the image side. The fifth
15 lens unit (Gr5) is composed of a positive biconvex lens element and a negative biconcave lens element.

In order to make compact a zoom-type lens optical system including a positive, a negative, a positive, and a positive (or a negative) lens unit, it is preferable to provide, as in the lens optical systems of the seventh to tenth embodiments, a diffraction grating
20 in the third lens unit (Gr3) from the viewpoint of aberration correction. Moreover, it is preferable that the third lens unit (Gr3) include a cemented lens element having a diffraction grating formed at its cementing interface (i.e. the interface between two

different optical materials), and that the cementing interface have a curvature different from the curvatures of the incident and exiting surfaces of the cemented lens element. This will be described in detail later.

Next, the conditions will be described that are preferably fulfilled by a lens
5 optical system as exemplified by the seventh to tenth embodiments, i.e. a zoom-type lens optical system having four lens units that are a positive, a negative, a positive, and a positive (or a negative) lens unit and having a diffraction grating disposed in its third lens unit (Gr3), wherein the third lens unit (Gr3) has a cemented lens element having a diffraction grating formed at its cementing interface, and the cementing
10 interface has a curvature different from the curvatures of the incident and exiting surfaces of the cemented lens element. Note that it is not necessary that all of the conditions given below be fulfilled simultaneously; if any of those conditions is fulfilled, it is possible to achieve the corresponding advantages. It is needless to say, however, that more than one condition should preferably be fulfilled to obtain
15 satisfactory results in terms of optical performance, miniaturization, and so forth.

It is preferable that the diffraction grating fulfill Condition (10) below.

$$0.02 < \phi_{\text{doe}} / \phi_{\text{gr3}} < 0.1 \quad (10)$$

20 wherein

ϕ_{doe} represents the optical power of the diffraction grating; and

ϕ_{gr3} represents the optical power of the third lens unit (Gr3).

Condition (10) defines the preferable ratio of the optical power ϕ_{doe} of the diffraction grating to the optical power ϕ_{gr3} of the third lens unit (Gr3) (which includes the optical power ϕ_{doe}). Fulfillment of Condition (10) makes it possible to achieve a satisfactorily compact lens optical system. If the value of Condition (10) is less than its lower limit, the diffractive lens element does not serve to correct chromatic aberration, and thus the lens optical system as a whole becomes unduly large. In contrast, if the value of Condition (10) is greater than its upper limit, the diffractive lens element causes unduly large astigmatism. In this case, correction of astigmatism cannot be achieved without making the lens optical system as a whole unduly large.

It is preferable that the diffraction grating fulfill Condition (11) below. Fulfillment of Condition (11) makes it possible to achieve a lens optical system that corrects chromatic aberration properly. If the value of Condition (11) is less than its lower limit, it is impossible to hold the lens units in position. In contrast, if the value of Condition (11) is greater than its upper limit, longitudinal chromatic aberration is undercorrected at the wide-angle end [W].

$$0.05 < tW/fW < 0.4 \quad (11)$$

wherein

tW represents the axial distance, as converted into an aerial distance, between the diffraction grating and the aperture stop (S) at the wide-angle end [W]; and
fW represents the focal length of the entire zoom lens system at the wide-angle end [W].

It is preferable that Condition (12) below be fulfilled. Fulfillment of Condition (12) makes it possible to keep within an acceptable range the loss of brightness as occurs at the edge of image frame when an image sensor is used.

$$| Y'_{\max} / PZ | < 0.4 \quad (12)$$

wherein

Y'_{\max} represents the maximum image height; and

PZ represents the distance from the image plane (I) to the exit pupil.

Here, the conditions will be described that are preferably fulfilled by a lens optical system that has, like those of the seventh to tenth embodiments, a diffraction grating acting as a lens formed at the cementing interface between two different optical materials. Note that, as in Conditions (10) and (12) mentioned above, it is not necessary that all of the conditions given below be fulfilled simultaneously; if any of

those conditions is fulfilled, it is possible to achieve the corresponding advantages. However, it is more preferable that more than one condition be fulfilled to obtain satisfactory results in terms of optical performance, miniaturization, and so forth.

It is preferable that the diffraction grating fulfill Condition (13) below which defines the blaze shape at an arbitrary height H in a direction perpendicular to the optical axis. The degradation of the diffraction efficiency for an obliquely-incident light ray does not lead to any serious problem as long as the diffraction grating fulfills Condition (13) below. If the value of Condition (13) is greater than its upper limit, the diffractive lens element does not exhibit sufficiently high diffraction efficiency.

$$|(h/d)\tan\theta| \leq 0.045 \quad (13)$$

wherein

h represents the grating height of the diffraction grating;

d represents the grating pitch; and

θ represents the angle of incidence.

Here, based on the formula of the phase function $\Phi(H)$

$$\Phi(H) = (2\pi / \lambda_0) \cdot \sum_{i=1} (C_i \cdot H^{2i})$$

(where C_i represents the phase function coefficient and λ_0 represents the design wavelength), the grating pitch d is given by the following formula, for a specific height

5 H in a direction perpendicular to the optical axis:

$$d(H) = -2\pi / (d\Phi/dH)$$

It is preferable that the diffraction grating fulfill Condition (14) below. The
 10 degradation of the diffraction efficiency for an obliquely-incident light ray does not lead to any serious problem as long as the diffraction grating fulfills Condition (14) below. If the value of Condition (14) is less than its lower limit, the diffractive lens element undercorrects chromatic aberration. In contrast, if the value of Condition (14) is greater than its upper limit, the diffractive lens element does not exhibit
 15 sufficiently high diffraction efficiency.

$$0.01 \leq | \{ (h \cdot \phi_{\text{doe}} \cdot D_{\text{doe}}) / (2 \cdot \lambda_0) \} \cdot \tan(\omega_{\text{max}}) | \leq 0.06 \quad (14)$$

wherein

20

h represents the grating height of the diffraction grating;

λ_0 represents the design wavelength;

ϕ_{doe} represents the optical power of the diffraction grating;

D_{doe} represents the effective diameter of the diffraction grating acting as a

5 lens; and

ω_{max} represents the maximum value of the half angle of view of the lens optical system.

It is preferable that the diffraction grating fulfill Condition (15) below. In an
10 ordinary taking lens system, the degradation of the diffraction efficiency for an
obliquely-incident light ray does not lead to any serious problem as long as the
diffraction grating fulfills Condition (15) below. If the value of Condition (15) is less
than its lower limit, the diffractive lens element undercorrects chromatic aberration.
In contrast, if the value of Condition (15) is greater than its upper limit, the diffractive
15 lens element does not exhibit sufficiently high diffraction efficiency.

$$0.005 \leq |(h/d_{\text{min}}) \cdot \tan(\omega_{\text{max}})| \leq 0.07 \quad (15)$$

wherein

20

h represents the grating height of the diffraction grating;

d_{min} represents the minimum grating pitch within the effective diameter of the

diffraction grating acting as a lens; and

ω_{\max} represents the maximum value of the half angle of view of the lens optical system.

5 Next, in connection with Conditions (13), (14), and (15) noted above, the diffraction efficiency obtained when a light ray is obliquely incident on the diffraction grating employed in the lens optical systems of the seventh to tenth embodiments will be described. Figs. 33A and 33B are enlarged views each showing a state in which a light ray is obliquely incident on a blaze-formed diffraction grating. Of these two diagrams,
10 Fig. 33A shows a case where the grating height h is low, corresponding to a case where the diffraction grating is provided on a lens surface bordering air. Fig. 33B shows a case where the grating height h is high, corresponding to a case where the diffraction grating is provided at the interface between two different optical materials. Note that, in Figs. 33A and 33B, the dotted line AX' indicates a line parallel to the optical axis (AX shown
15 in Fig. 35) of the lens optical system, and the hatched area $D0$ indicates a non-diffractive region that results from the grating height h .

As will be understood from Figs. 33A and 33B, the higher the grating height h , the wider the non-diffractive region $D0$. Accordingly, it is expected that, as the grating pitch d becomes smaller, the grating height h becomes higher relatively, and
20 thus the non-diffractive region $D0$ becomes wider. Moreover, it is also expected that, the larger the angle of incidence θ , the wider the non-diffractive region $D0$. In addition, as will be understood from the relationship between Figs. 33A and 33B, the

size of the non-diffractive region D0 is proportional to $(h/d)\tan\theta$.

Fig. 34 is a graph showing the relationship between the grating pitch (d/λ_0) and the diffraction efficiency. This graph shows calculation results of how the diffraction efficiency varies with respect to the grating pitch d when a light ray of the design wavelength $\lambda_0 = 587\text{nm}$ is incident, at an angle of incidence $\theta = 10^\circ$, on a blaze-formed diffraction grating having a grating height of $h = 17\text{ }\mu\text{m}$. It is experimentally known that diffraction efficiency as high as 0.9 or more is required in practical use. Thus, in Fig. 34, the range indicated by arrow α_1 is the range of diffraction efficiency required in practical use. Based on this range of diffraction efficiency required in practical use, the range, indicated by arrow α_2 in Fig. 34, that should be fulfilled by the grating pitch d is determined. If the value of $(h/d)\tan\theta$, which depends on the grating height h of the blaze-formed diffraction grating, the grating pitch d , and the angle of incidence θ at which a light ray is incident on the diffraction grating, lies within the range defined by Condition (13), it is possible to obtain sufficiently high diffraction efficiency required in practical use.

$$|(h/d)\tan\theta| \leq 0.045 \quad (13)$$

Next, the grating pitch d will be described. In a case where a diffraction grating acts as a lens, if it is assumed that C_i represents the phase function coefficient and λ_0 represents the design wavelength, then, for a height H with respect to the

optical axis, the phase function $\Phi(H)$ of the diffraction grating is defined by the following formula:

$$\Phi(H) = (2\pi / \lambda_0) \cdot \sum_{i=1} (C_i \cdot H^{2i})$$

5 In particular, the optical power ϕ doe of the diffraction grating is defined by the following formula:

$$\phi \text{ doe} = -2 \cdot C_1$$

10 The grating pitch d is defined by the following formula, which is obtained by the first-order differentiation of the phase function $\Phi(H)$ with respect to the height H in a direction perpendicular to the optical axis:

$$d(H) = -2 \pi / (d\Phi/dH)$$

15

In an ordinary diffractive lens element, the phase function coefficient C_1 (i.e. C_i with $i=1$) used to determine the optical power thereof is so great that, for a height H in a direction perpendicular to the optical axis smaller than the effective radius, the grating pitch $d(H)$ decreases monotonically. Here, the phase function coefficient C_i with $i > 1$ is very small, and thus, if it is ignored and the effective diameter of the

20

diffraction grating acting as a lens is assumed to be D_{doe} , then the minimum value d_{min} of the grating pitch $d(H)$ is defined by Condition (16) below. From Condition (16), it will be understood that, the stronger the optical power ϕ_{doe} of the diffractive lens element, and the larger the effective diameter D_{doe} , the narrower the grating
5 pitch $d(H)$.

$$d_{min} = d(D_{doe}/2) = -(2 \cdot \lambda_0) / (2 \cdot C_1 \cdot D_{doe}) = (2 \cdot \lambda_0) / (\phi_{doe} \cdot D_{doe}) \quad (16)$$

Next, the angle of incidence θ will be described. In a lens optical system, as
10 shown in Fig. 35, the angle of incidence θ varies according to the angle of view (in Fig. 35, AX represents the optical axis of the lens optical system). Thus, when the angle of view is at its maximum, the angle of incidence θ is at its maximum. Strictly speaking, the angle of incidence θ with respect to the lens surface varies with the lens arrangement of the entire lens optical system. However, in Condition (13) noted
15 previously, even if the angle of incidence θ is replaced with the maximum half angle of view ω_{max} , it is still possible to grasp how the diffraction efficiency varies with the angle of incidence θ . Thus, by substituting Condition (16) in Condition (13) and then revising the value of the constant on the right side accordingly, the following condition (17) is obtained:

20

$$| \{ (h \cdot \phi_{doe} \cdot D_{doe}) / (2 \cdot \lambda_0) \} \cdot \tan(\omega_{max}) | \leq 0.06 \quad (17)$$

Example 7 to 10

Hereinafter, examples of lens optical systems embodying the present invention will be presented with reference to their construction data, graphic representations of aberrations, and other data. Tables 23, 24, 25, and 26 list the construction data of Examples 7, 8, 9, and 10, which respectively correspond to the seventh, eighth, ninth, and tenth embodiments described above and have lens arrangements as shown in Figs. 22A to 22C; 24A to 24C; 26A to 26C; and 28A to 28C. Table 27 lists the construction data of Comparison Example 4, which corresponds to Example 7 but has a lens arrangement as shown in Figs. 30A to 30C (i.e. having no diffraction grating).

In the construction data of each example, r_i ($i = 1, 2, 3, \dots$) represents the radius of curvature of the i th surface counted from the object side, d_i ($i = 1, 2, 3, \dots$) represents the i th axial distance counted from the object side, and N_i ($i = 1, 2, 3, \dots$) and v_i ($i = 1, 2, 3, \dots$) respectively represent the refractive index for the d line and the Abbe number of the i th optical element counted from the object side. Moreover, in the construction data, for each of the axial distances that vary with zooming (i.e. the variable axial distances), three values are given that are, from left, the axial aerial distance between the lens units at the wide-angle end [W] (i.e. in the shortest-focal-length condition), the same distance at the middle focal length [M], and the same distance at the telephoto end [T] (i.e. in the longest-focal-length condition). Also listed are the focal length f , the half angle of view ω ($^\circ$), and the F-number FNO of the entire lens optical system in the three focal-length conditions [W], [M], and [T]

mentioned just above, and the values corresponding to Conditions (10), (11), and (12) noted above. Moreover, Table 28 lists the values corresponding to Condition (13), and Table 29 lists the values corresponding to Conditions (14) and (15). Note that, in Table 28, the reason that the value of Condition (13) is given as a particular range is that the value of the grating pitch d varies according to the height H with respect to the optical axis.

A surface whose radius of curvature r_i is marked with an asterisk (*) is an aspherical surface, whose surface shape is defined by Formula (as) noted earlier. A surface whose radius of curvature r_i is marked with # is a diffractive lens surface, i.e. a lens surface having a diffraction grating formed thereon, of which the phase shape of the pitch is defined by Formula (ds) noted earlier. Also listed together are the aspherical surface data of each aspherical surface, the diffractive surface data of each diffractive lens surface, and other data.

The lens optical system of Comparison Example 4 is built as a four-unit zoom lens system of a positive-negative-positive-positive configuration. In this lens optical system, the lens units are each composed as follows. The first lens unit (Gr1) is composed of three lens elements that are a negative lens element, a positive lens element, and a positive lens element. The second lens unit (Gr2) is composed of three lens elements that are a negative lens element, a negative lens element, and a positive lens element. The third lens unit (Gr3) is composed of two lens elements that are a positive lens element and a negative lens element. The fourth lens unit (Gr4) is composed of two lens elements that are a positive lens element and a negative

lens element. Table 30 lists the chromatic aberration coefficients of the entire lens optical system, as well as of the individual lens units (Gr1, Gr2, Gr3, and Gr4) thereof, of Comparison Example 4, as observed at the wide angle end [W] and the telephoto end [T] (note that LC represents the longitudinal chromatic aberration coefficient and TC represents the lateral chromatic aberration coefficient).

In Comparison Example 4, as will be understood from the chromatic aberration coefficients of the entire lens optical system listed in Table 30, at the wide angle end [W], the longitudinal chromatic aberration coefficient LC and the lateral chromatic aberration coefficient TC take great positive values, and, at the telephoto end [T], the lateral chromatic aberration coefficient TC takes a great negative value. Moreover, the degree to which the longitudinal chromatic aberration observed at the wide angle end [W] affects adversely on the entire lens optical system is great relative to the degree to which the lateral chromatic aberration observed at the wide angle end [W] (and at the telephoto end [T]) affects adversely on the entire lens optical system. Accordingly, correcting the longitudinal chromatic aberration observed at the wide angle end [W] is effective in correcting overall aberrations.

On the other hand, the longitudinal chromatic aberration coefficient LC originates mostly in the vicinity of the aperture stop (S), i.e., in the position corresponding to the third lens unit (Gr3) at the wide-angle end [W]. Accordingly, by providing a diffractive lens element in the third lens unit (Gr3), it will be possible to correct chromatic aberration effectively. The lens arrangement of the lens optical system of Comparison Example 4, if a diffractive lens element is provided in its third

lens unit (Gr3), corresponds to the lens arrangement of the lens optical system of Example 7. Table 31 lists, as Table 30 does, the chromatic aberration coefficients of the entire lens optical system, as well as of the individual lens units (Gr1, Gr2, Gr3, and Gr4) thereof, of Example 7, as observed at the wide angle end [W] and the telephoto end [T]. Note that, here, for the third lens unit (Gr3), two sets of values are given, with the chromatic aberration coefficients of the entire third lens unit (Gr3) listed in the left-hand column and the chromatic aberration coefficients produced by the diffractive lens element included therein listed in the right-hand column. As will be understood from Table 31, the negative longitudinal chromatic aberration coefficient LC produced by the diffractive lens element included in the third lens unit (Gr3) acts to improve the longitudinal chromatic aberration coefficient LC of the entire lens optical system as observed at the wide-angle end [W].

Next, the astigmatism and the Petzval effect observed when a diffractive lens element is used will be described. Here, the following three models (a), (b), and (c) of a diffractive lens element, i.e. an optical system composed of a thin lens element, as shown in Figs. 32A, 32B, and 32C, respectively, will be considered.

(a) a cemented lens element formed by cementing together a positive and a negative lens element;

(b) a cemented lens element formed by cementing together a positive and a negative lens element, with a diffractive lens surface (indicated by a broken line) formed on its cementing surface; and

(c) a single positive lens element having a diffractive lens surface (indicated by a

broken line) formed thereon.

In the model (a), chromatic aberration is corrected by the combination of the positive and negative lens elements. In the model (b), chromatic aberration is corrected by the combination of the positive and negative lens elements and also by the diffractive lens surface. In the model (c), chromatic aberration is corrected solely by the diffractive lens surface. The relationship among these models (a), (b), and (c) in terms of the degree to which they, acting as diffractive lens elements, correct chromatic aberration is given as : (a) < (b) < (c). Thus, the relationship among those models (a), (b), and (c) in terms of the power they exert as diffractive lens elements is also given as : (a) < (b) < (c). Accordingly, the diffractive lens element of the model (c), which corrects chromatic aberration to the highest degree, exerts the strongest optical power.

In Comparison Example 4, the third lens unit (Gr3) is composed of a positive and a negative lens element. The positive lens element is made of a glass material that has a relatively low refractive index and a relatively low dispersion. The negative lens element is made of a glass material that has a relatively high refractive index and a relatively high dispersion. Correspondingly, it is assumed that the cemented lens element constituting the models (a) and (b) employs a positive lens element made of a glass material that has a relatively low refractive index and a relatively low dispersion, and a negative lens element made of a glass material that has a relatively high refractive index and a relatively high dispersion. In the third lens unit (Gr3) of the lens optical system of Example 7, the positive lens element is made of a glass material that has a relatively high refractive index and a relatively low dispersion, and the

negative lens element is made of a glass material that has a relatively low refractive index and a relatively high dispersion. Accordingly, here, as a cemented lens element of the model (b), two types will be considered, i.e. a positive lens element made of a glass material that has a relatively high refractive index and a relatively low dispersion and a negative lens element made of a glass material that has a relatively low refractive index and a relatively high dispersion. Table 32 lists the data of the glass materials employed here (note that n_d represents the refractive index for the d line and v_d represents the Abbe number).

Table 33 lists the aberration coefficients of the optical system as a whole of the models (a), (b), and (c) (note that PT represents a Petzval coefficient and AS represents an astigmatism coefficient). In Comparison Example 4, the third lens unit (Gr3) is disposed behind the aperture stop (S). Correspondingly, the aberration coefficients are calculated on the assumption that the models (a), (b), or (c) is disposed behind the aperture stop (S). Moreover, the aberration coefficients of the models (a), (b), and (c) are calculated on the assumption that the lens surfaces are given curvatures (bending) such that the spherical aberration coefficients of the entire optical system is minimized. As will be understood From Table 33, the stronger the optical power of the diffractive lens element, the smaller the Petzval coefficient PT and the greater the astigmatism coefficient AS.

Table 34 lists the Petzval coefficients PT and the astigmatism coefficients AS as observed in Comparison Example 4 and Example 7 (an optical system having a diffractive lens element disposed in its third lens unit (Gr3)). These two optical systems

are designed to have such sizes as to offer equivalent lens performance. As will be understood from Table 34, in Comparison Example 4, at the wide-angle end [W], the astigmatism coefficient AS takes a fairly great positive value. The diffractive lens element serves to reduce the Petzval coefficient PT of the third lens unit (Gr3). This makes correction of aberrations easier, and thereby helps achieve a compact zoom-type lens optical system.

As will be understood from the foregoing, with a lens optical system employing a diffractive lens element, how compact it can be made depends on the balance between the effect of chromatic aberration correction and the effects of the Petzval sum and astigmatism. Moreover, by providing a diffractive lens element in the third lens unit (Gr3) of a zoom-type lens optical system having four lens units that are a positive, a negative, a positive, and a positive (or negative) lens unit, like those of Examples 7 to 10, it is possible to achieve a satisfactorily compact lens optical system, thanks to the effect of chromatic aberration correction.

Figs. 23A to 23I, 25A to 25I, 27A to 27I, and 29A to 29I are graphic representations of the aberrations observed in the lens optical systems of Examples 7, 8, 9, and 10, respectively. Figs. 31A to 31I are graphic representations of the aberrations observed in the lens optical system of Comparison Example 4. Of these diagrams, Figs. 23A, 23B, 23C, 25A, 25B, 25C, 27A, 27B, 27C, 29A, 29B, 29C, 31A, 31B, and 31C show the aberrations observed at the wide-angle end [W]; Figs. 23D, 23E, 23F, 25D, 25E, 25F, 27D, 27E, 27F, 29D, 29E, 29F, 31D, 31E, and 31F show the aberrations observed at the middle focal length [M]; and Figs. 23G, 23H, 23I, 25G, 25H, 25I, 27G,

27H, 27I, 29G, 29H, 29I, 31G, 31H, and 31I show the aberrations observed at the telephoto end [T]. Furthermore, of these diagrams, Figs. 23A, 23D, 23G, 25A, 25D, 25G, 27A, 27D, 27G, 29A, 29D, 29G, 31A, 31D, and 31G show spherical aberration; Figs. 23B, 23E, 23H, 25B, 25E, 25H, 27B, 27E, 27H, 29B, 29E, 29H, 31B, 31E, and 31H show astigmatism; and Figs. 23C, 23F, 23I, 25C, 25F, 25I, 27C, 27F, 27I, 29C, 29F, 29I, 31C, 31F, and 31I show distortion. In the spherical aberration diagrams, the value H/H_0 obtained by normalizing the height H at which a light ray enters the entrance pupil with respect to the maximum height H_0 ($=1$) (i.e. the relative height at which the light ray crosses the entrance-pupil plane) is taken along the vertical axis, and the deviation (mm) from the paraxial imaging position along the optical axis is taken along the horizontal axis. In addition, the broken line represents the spherical aberration for the C line (wavelength λ_C : 656. 3nm), the solid line represents the spherical aberration for the d line (wavelength λ_d : 587. 6nm), and the dash-and-dot line represents the spherical aberration for the g line (wavelength λ_g : 435. 8nm). In the astigmatism diagrams, the image height Y' (mm) is taken along the vertical axis, and the deviation (mm) from the paraxial imaging position along the optical axis is taken along the horizontal axis. In addition, the solid line X represents the astigmatism on the sagittal plane, and the solid line Y represents the astigmatism on the meridional plane. In the distortion diagrams, the image height Y' (mm) is taken along the vertical axis, and the amount of distortion (%) is taken along the horizontal axis.

Embodiment 11

The lens optical system of the eleventh embodiment is built as a four-unit zoom lens system that is composed of, from the object side, a first lens unit (Gr1) having a negative optical power, a second lens unit (Gr2) having a positive optical power, a third lens unit (Gr3) having a negative optical power, and a fourth lens unit (Gr4) having a positive optical power, wherein zooming is performed by varying the distance between the first and second lens units (Gr1 and Gr2), the distance between the third and fourth lens units (Gr3 and Gr4), and so forth. In this lens optical system, between the second and third lens units (Gr2 and Gr3), an aperture stop (S) is disposed that is substantially kept in a fixed position during zooming. Moreover, a low-pass filter (LPF) is disposed at the image-plane (I) side end of the lens optical system.

In the lens optical system of the eleventh embodiment (Figs. 36A to 36C), the lens units are each composed, from the object side, as follows. The first lens unit (Gr1) is composed of a negative biconcave lens element and a positive meniscus lens element convex to the object side. The second lens unit (Gr2) is composed of a cemented lens element formed by cementing together a negative meniscus lens element concave to the image side and a positive biconvex lens element, and a positive meniscus lens element convex to the object side. The third lens unit (Gr3) is composed of a cemented lens element formed by cementing together a positive meniscus lens element convex to the image side and a negative biconcave lens element. The fourth lens unit (Gr4) is composed of a positive biconvex lens element and a cemented lens element formed by cementing together a negative meniscus lens

element concave to the image side and a positive biconvex lens element, with a diffraction grating formed on its fourteenth surface (r14). In order to make this zoom-type lens optical system satisfactorily compact, it is preferable to provide a diffraction grating in the fourth lens unit (Gr4) from the viewpoint of aberration correction. This will be described in detail later.

Next, the conditions will be described that are preferably fulfilled by a lens optical system as exemplified by the eleventh embodiment, i.e. a zoom-type lens optical system having four lens units that are a negative, a positive, a negative, and a positive lens unit, wherein a diffraction grating is disposed in the fourth lens unit (Gr4). Note that it is not necessary that all of the conditions given below be fulfilled simultaneously; if any of those conditions is fulfilled, it is possible to achieve the corresponding advantages. It is needless to say, however, that more than one condition should preferably be fulfilled to obtain satisfactory results in terms of optical performance, miniaturization, and so forth.

It is preferable that the diffraction grating fulfill Condition (18) below.

$$0.001 < \phi_{\text{doe}} / \phi_{\text{gr4}} < 0.01 \quad (18)$$

wherein

ϕ_{doe} represents the optical power of the diffraction grating; and

ϕ_{gr4} represents the optical power of the fourth lens unit (Gr4).

Condition (18) defines the preferable ratio of the optical power ϕ_{doe} of the diffraction grating to the optical power ϕ_{gr4} of the fourth lens unit (Gr4) (which includes the optical power ϕ_{doe}). Fulfillment of Condition (18) makes it possible to achieve a satisfactorily compact lens optical system. If the value of Condition (18) is less than its lower limit, the diffractive lens element does not serve to correct chromatic aberration, and thus the lens optical system as a whole becomes unduly large. In contrast, if the value of Condition (18) is greater than its upper limit, the diffractive lens element causes unduly large astigmatism. In this case, correction of astigmatism cannot be achieved without making the lens optical system as a whole unduly large.

It is preferable that the diffraction grating fulfill at least one of Conditions (19) and (20) below.

$$1.0 < tW / fW < 4.0 \quad (19)$$

$$tT / fT < 1.0 \quad (20)$$

wherein

tW represents the axial distance, as converted into an aerial distance, between the diffraction grating and the aperture stop (S) at the wide-angle end [W];

tT represents the axial distance, as converted into an aerial distance, between the diffraction grating and the aperture stop (S) at the telephoto end [T];

5 fW represents the focal length of the entire zoom lens system at the wide-angle end [W]; and

fT represents the focal length of the entire zoom lens system at the telephoto end [T].

10 Fulfillment of Conditions (19) or (20) or both makes it possible to achieve a lens optical system that corrects chromatic aberration properly. If the value of Condition (19) is less than its lower limit, lateral chromatic aberration is undercorrected at the wide-angle end [W]. In contrast, if the value of Condition (19) is greater than its upper limit, the lens optical system as a whole becomes unduly large. On the other
15 hand, if the value of Condition (20) is greater than its upper limit, lateral chromatic aberration becomes unduly large at the telephoto end [T].

It is preferable that Condition (21) below be fulfilled. Fulfillment of Condition (21) makes it possible to keep within an acceptable range the loss of brightness as occurs at the edge of image frame when an image sensor is used.

20

$$|Y'_{\max}/PZ| < 0.4 \quad (21)$$

wherein

Y'_{\max} represents the maximum image height; and

PZ represents the distance from the image plane (I) to the exit pupil.

5

Example 11

Hereinafter, an example of a lens optical system embodying the present invention will be presented with reference to its construction data, graphic representations of aberrations, and other data. Table 35 lists the construction data of

10 Example 11, which corresponds to the eleventh embodiment described above and has a lens arrangement as shown in Figs. 36A, 36B, and 36C. Table 36 lists the construction data of Comparison Example 5, which corresponds to Example 11 but has a lens arrangement as shown in Figs. 38A, 38B, and 38C (i.e. having no diffraction grating).

15 In the construction data of each example, r_i ($i = 1, 2, 3, \dots$) represents the radius of curvature of the i th surface counted from the object side, d_i ($i = 1, 2, 3, \dots$) represents the i th axial distance counted from the object side, and N_i ($i = 1, 2, 3, \dots$) and v_i ($i = 1, 2, 3, \dots$) respectively represent the refractive index for the d line and the Abbe number of the i th optical element counted from the object side. Moreover, in

20 the construction data, for each of the axial distances that vary with zooming (i.e. the variable axial distances), three values are given that are, from left, the axial aerial distance between the lens units at the wide-angle end [W] (i.e. in the shortest-focal-

length condition), the same distance at the middle focal length [M], and the same distance at the telephoto end [T] (i.e. in the longest-focal-length condition). Also listed are the focal length f , the half angle of view ω ($^\circ$), and the F-number FNO of the entire lens optical system in the three focal-length conditions [W], [M], and [T] mentioned just above, and the values corresponding to Conditions noted above.

A surface whose radius of curvature r_i is marked with an asterisk (*) is an aspherical surface, whose surface shape is defined by Formula (as) noted earlier. A surface whose radius of curvature r_i is marked with # is a diffractive lens surface, i.e. a lens surface having a diffraction grating formed thereon, of which the phase shape of the pitch is defined by Formula (ds) noted earlier. Also listed together are the aspherical surface data of each aspherical surface, the diffractive surface data of each diffractive lens surface, and other data.

The lens optical system of Comparison Example 5 is built as a four-unit zoom lens system of a negative-positive-negative-positive configuration. In this lens optical system, the lens units are each composed as follows. The first lens unit (Gr1) is composed of two lens elements that are a negative lens element and a positive lens element. The second lens unit (Gr2) is composed of three lens elements that are a negative lens element, a positive lens element, and a positive lens element. The third lens unit (Gr3) is composed of two lens elements that are a positive lens element and a negative lens element. The fourth lens unit (Gr4) is composed of three lens elements that are a positive lens element, a negative lens element, and a positive lens element. Table 37 lists the chromatic aberration coefficients of the entire lens optical system, as

well as of the individual lens units (Gr1, Gr2, Gr3, and Gr4) thereof, of Comparison Example 5, as observed at the wide angle end [W] and the telephoto end [T] (note that LC represents the longitudinal chromatic aberration coefficient and TC represents the lateral chromatic aberration coefficient). In Comparison Example 5, as will be understood
5 from the chromatic aberration coefficients of the entire optical system listed in Table 37, at the wide angle end [W], the lateral chromatic aberration coefficient TC takes a great positive value. Now, how chromatic aberration is corrected in the lens optical system of Comparison Example 5 if a diffractive lens element is provided in the first, second, third, or fourth lens unit (Gr1, Gr2, Gr3, and Gr4) will be described.

10 Assume that a diffractive lens element is provided in the first lens unit (Gr1) of the lens optical system of Comparison Example 5. In this lens optical system, since the first lens unit (Gr1) is disposed away from the aperture stop (S) on the front side thereof, the lateral chromatic aberration coefficient TC takes a great value. If, to correct this, a diffractive lens element which produces a negative lateral chromatic aberration
15 coefficient TC is provided in the first lens unit (Gr1), the diffractive lens element will cause a positive longitudinal chromatic aberration coefficient LC. Even though this positive longitudinal chromatic aberration coefficient LC is small, it increases the longitudinal chromatic aberration coefficients LC of the entire lens optical system in the positive direction. Accordingly, it is not preferable to provide a diffractive lens
20 element in the first lens unit (Gr1).

Assume that a diffractive lens element is provided in the second lens unit (Gr2) of the lens optical system of Comparison Example 5. In this lens optical system, the

second lens unit (Gr2) is disposed immediately in front of the aperture stop (S) at the wide-angle end [W], and is disposed away from the aperture stop (S) on the front side thereof at the telephoto end [T]. Thus, at the wide-angle end [W], the longitudinal chromatic aberration coefficient LC takes a great value, and, at the telephoto end [T], the lateral chromatic aberration coefficients TC takes a great value. This is inconsistent with the fact that, in Comparison Example 5, it is necessary to improve the lateral chromatic aberration coefficient TC observed at the wide-angle end [W]. Accordingly, it is expected that providing a diffractive lens element in the second lens unit (Gr2) will be ineffective.

Assume that a diffractive lens element is provided in the third lens unit (Gr3) of the lens optical system of Comparison Example 5. In this lens optical system, the third lens unit (Gr3) is disposed immediately behind the aperture stop (S) at the wide-angle end [W], and is disposed away from the aperture stop (S) on the back side thereof at the telephoto end [T]. Thus, at the wide-angle end [W], the longitudinal chromatic aberration coefficient LC takes a great value, and, at the telephoto end [T], the lateral chromatic aberration coefficients TC takes a great value. This is inconsistent with the fact that, in Comparison Example 5, it is necessary to improve the lateral chromatic aberration coefficient TC observed at the wide-angle end [W]. Accordingly, it is expected that providing a diffractive lens element in the third lens unit (Gr3) will be ineffective.

Assume that a diffractive lens element is provided in the fourth lens unit (Gr4) of the lens optical system of Comparison Example 5. In this case, the lens

arrangement of Comparison Example 5 corresponds to the lens arrangement of Example 11. Table 38 lists, as Table 37 does, the chromatic aberration coefficients of the entire lens optical system, as well as of the individual lens units (Gr1, Gr2, Gr3, and Gr4) thereof, of Example 11, as observed at the wide angle end [W] and the telephoto end [T]. Note that, here, for the fourth lens unit (Gr4), two sets of values are given, with the chromatic aberration coefficients of the entire fourth lens unit (Gr4) listed in the left-hand column and the chromatic aberration coefficients produced by the diffractive lens element included therein listed in the right-hand column.

Since the fourth lens unit (Gr4) is disposed away from the aperture stop (S) on the back side of the lens optical system, the lateral chromatic aberration coefficient TC takes a great value. If, to correct this, a diffractive lens element which produces a negative lateral chromatic aberration coefficient TC is provided in the fourth lens unit (Gr4), the diffractive lens element will cause a negative longitudinal chromatic aberration coefficient LC. In Comparison Example 5, the longitudinal chromatic aberration coefficient LC takes a positive value, and is thus canceled by the longitudinal chromatic aberration coefficient LC produced by the diffractive lens element. This helps enhance the effect of chromatic aberration correction exerted by the diffractive lens element. Moreover, in Example 11, the lateral chromatic aberration coefficient TC takes a small value at the wide angle end [W]. Accordingly, it will be understood that it is preferable to provide a diffractive lens element in the fourth lens unit (Gr4) and that the diffractive lens element exhibits the greatest chromatic aberration correction effect when provided in the fourth lens unit (Gr4).

Next, the astigmatism and the Petzval effect observed when a diffractive lens element is used will be described. Here, the following three models (a), (b), and (c) of a diffractive lens element, i.e. an optical system composed of a thin lens element, as shown in Figs. 40A, 40B, and 40C, respectively, will be considered.

5 (a) a cemented lens element formed by cementing together a positive and a negative lens element;

(b) a cemented lens element formed by cementing together a positive and a negative lens element, with a diffractive lens surface (indicated by a broken line) formed on its cementing surface; and

10 (c) a single positive lens element having a diffractive lens surface (indicated by a broken line) formed thereon.

In the model (a), chromatic aberration is corrected by the combination of the positive and negative lens elements. In the model (b), chromatic aberration is corrected by the combination of the positive and negative lens elements and also by the diffractive
15 lens surface. In the model (c), chromatic aberration is corrected solely by the diffractive lens surface. The relationship among these models (a), (b), and (c) in terms of the degree to which they, acting as diffractive lens elements, correct chromatic aberration is given as : (a) < (b) < (c). Thus, the relationship among those models (a), (b), and (c) in terms of the power they exert as diffractive lens elements is also given as : (a) < (b) <
20 (c). Accordingly, the diffractive lens element of the model (c), which corrects chromatic aberration to the highest degree, exerts the strongest optical power.

In Comparison Example 5, the fourth lens unit (Gr4) is composed of a positive

and a negative lens element. The positive lens element is made of a glass material that has a relatively low refractive index and a relatively low dispersion. The negative lens element is made of a glass material that has a relatively high refractive index and a relatively high dispersion. Correspondingly, it is assumed that the cemented lens element constituting the models (a) and (b) employs a positive lens element made of a glass material that has a relatively low refractive index and a relatively low dispersion, and a negative lens element made of a glass material that has a relatively high refractive index and a relatively high dispersion. Table 39 lists the data of the glass materials employed here (note that n_d represents the refractive index for the d line and v_d represents the Abbe number).

Table 40 lists the aberration coefficients of the optical system as a whole of the models (a), (b), and (c) (note that PT represents a Petzval coefficient and AS represents an astigmatism coefficient). In Comparison Example 5, the fourth lens unit (Gr4) is disposed behind the aperture stop (S). Correspondingly, the aberration coefficients are calculated on the assumption that the models (a), (b), or (c) is disposed behind the aperture stop (S). Moreover, the aberration coefficients of the models (a), (b), and (c) are calculated on the assumption that the lens surfaces are given curvatures (bending) such that the spherical aberration coefficients of the entire optical system is minimized. As will be understood from Table 40, the stronger the optical power of the diffractive lens element, the smaller the Petzval coefficient PT and the greater the astigmatism coefficient AS.

Table 41 lists the Petzval coefficients PT and the astigmatism coefficients AS as

observed in Comparison Example 5 and Example 11 (an optical system having a diffractive lens element disposed in its fourth lens unit (Gr4)). These two optical systems are designed to have such sizes as to offer equivalent lens performance. As will be understood from Table 41, in Comparison Example 5, the Petzval coefficient PT of the entire lens optical system takes a great positive value. The diffractive lens element serves to reduce the Petzval coefficient PT of the fourth lens unit (Gr4). This makes correction of aberrations easier, and thereby helps achieve a compact zoom-type lens optical system.

As will be understood from the foregoing, with a lens optical system employing a diffractive lens element, how compact it can be made depends on the balance between the effect of chromatic aberration correction and the effects of the Petzval sum and astigmatism. Moreover, by providing a diffractive lens element in the fourth lens unit (Gr4) of a zoom-type lens optical system having four lens units that are a negative, a positive, a negative, and a positive lens unit, like that of Example 11, it is possible to achieve a satisfactorily compact lens optical system, thanks to the effect of chromatic aberration correction.

Figs. 37A to 37I are graphic representations of the aberrations observed in the lens optical system of Example 11, and Figs. 39A to 39I are graphic representations of the aberrations observed in the lens optical system of Comparison Example 5. Of these diagrams, Figs. 37A, 37B, 37C, 39A, 39B, and 39C show the aberrations observed at the wide-angle end [W]; Figs. 37D, 37E, 37F, 39D, 39E, and 39F show the aberrations observed at the middle focal length [M]; and Figs. 37G, 37H, 37I, 39G, 39H,

and 39I show the aberrations observed at the telephoto end [T]. Furthermore, of these diagrams, Figs. 37A, 37D, 37G, 39A, 39D, and 39G show spherical aberration; Figs. 37B, 37E, 37H, 39B, 39E, and 39H show astigmatism; and Figs. 37C, 37F, 37I, 39C, 39F, and 39I show distortion. In the spherical aberration diagrams, the value H/H_0 obtained by normalizing the height H at which a light ray enters the entrance pupil with respect to the maximum height $H_0 (=1)$ (i.e. the relative height at which the light ray crosses the entrance-pupil plane) is taken along the vertical axis, and the deviation (mm) from the paraxial imaging position along the optical axis is taken along the horizontal axis. In addition, the broken line represents the spherical aberration for the C line (wavelength λ_C : 656. 3nm), the solid line represents the spherical aberration for the d line (wavelength λ_d : 587. 6nm), and the dash-and-dot line represents the spherical aberration for the g line (wavelength λ_g : 435. 8nm). In the astigmatism diagrams, the image height Y' (mm) is taken along the vertical axis, and the deviation (mm) from the paraxial imaging position along the optical axis is taken along the horizontal axis. In addition, the solid line X represents the astigmatism on the sagittal plane, and the solid line Y represents the astigmatism on the meridional plane. In the distortion diagrams, the image height Y' (mm) is taken along the vertical axis, and the amount of distortion (%) is taken along the horizontal axis.

TABLE 1
Construction Data of Example 1

$f=5.1\sim 16.0\sim 48.8$
 $\omega=31.3\sim 11.0\sim 3.63(^{\circ})$
 $FNO=2.75\sim 3.5\sim 4.1$

Radius of Curvature	Axial Distance	Refractive Index	Abbe Number
$r1^{*}= 15.99$			
	$d1= 0.40$	$N1= 1.84666$	$\nu 1= 23.82$
$r2= 13.05$	$d2= 0.06$		
$r3^{*}= 12.93$	$d3= 2.99$	$N2= 1.60311$	$\nu 2= 60.74$
$r4^{*}\#=-611.98$	$d4= 0.34$	$N3= 1.5644$	$\nu 3= 35.1$
$r5^{*}= 1275.53$	$d5= 0.1\sim 7.78\sim 11.83$		
$r6^{*}= 10.52$	$d6= 0.50$	$N4= 1.51728$	$\nu 4= 69.43$
$r7^{*}= 3.78$	$d7= 3.78$		
$r8^{*}= -9.54$	$d8= 0.69$	$N5= 1.62017$	$\nu 5= 24.01$
$r9^{*}\#=-7.17$	$d9= 0.50$	$N6= 1.713$	$\nu 6= 53.92$
$r10^{*}= -28.56$	$d10=18.01\sim 8.03\sim 0.5$		
$r11= \infty\{\text{Aperture Stop (S)}\}$	$d11= 0.10$		
$r12^{*}= 5.48$	$d12= 2.99$	$N7= 1.60311$	$\nu 7= 60.74$
$r13^{*}\#=-7.73$	$d13= 0.53$	$N8= 1.5644$	$\nu 8= 35.1$
$r14^{*}= -11.46$	$d14= 0.11$		
$r15^{*}= -13.96$	$d15= 3.22$	$N9= 1.7495$	$\nu 9= 35.17$
$r16^{*}= 36.98$			

$d16 = 6.70 \sim 10.46 \sim 17.44$
 $r17 = \infty$
 $d17 = 3.40 \quad N10 = 1.5168 \quad \sqrt{10} = 64.12$
 $r18 = \infty$
 $d18 = 1.02$
 $r19 = \infty \{ \text{Image Plane(I)} \}$

Aspherical Surface Data of First Surface (r1)

$A4 = 2.93 \times 10^{-6}$
 $A6 = 1.3532 \times 10^{-7}$
 $A8 = -3.1 \times 10^{-9}$

Aspherical Surface Data of Third Surface (r3)

$A4 = -1.3 \times 10^{-5}$
 $A6 = -5.051 \times 10^{-7}$
 $A8 = 5.5 \times 10^{-9}$
 $A10 = 9.26 \times 10^{-13}$

Aspherical Surface Data of Fourth Surface (r4)

$A4 = -2.4 \times 10^{-5}$
 $A6 = 1.3231 \times 10^{-7}$
 $A8 = 6.85 \times 10^{-9}$
 $A10 = -2.4 \times 10^{-11}$

Aspherical Surface Data of Fifth Surface (r5)

$A4 = 6.22 \times 10^{-6}$
 $A6 = -3.554 \times 10^{-7}$
 $A8 = 2.02 \times 10^{-9}$
 $A10 = -6.2 \times 10^{-12}$

Aspherical Surface Data of Sixth Surface (r6)

$A4 = 0.000941$
 $A6 = -0.0001001$
 $A8 = 3.49 \times 10^{-6}$
 $A10 = -4.5 \times 10^{-8}$

Aspherical Surface Data of Seventh Surface (r7)

$A4 = 0.001073$
 $A6 = -0.0001082$
 $A8 = 9.64 \times 10^{-7}$

$$A10 = -9.9 \times 10^{-8}$$

Aspherical Surface Data of Eighth Surface (r8)

$$A4 = -0.00046$$

$$A6 = 5.1001 \times 10^{-5}$$

$$A8 = -3.9 \times 10^{-6}$$

$$A10 = -1.4 \times 10^{-8}$$

Aspherical Surface Data of Ninth Surface (r9)

$$A4 = -0.00147$$

$$A6 = 1.3879 \times 10^{-5}$$

$$A8 = 1.99 \times 10^{-6}$$

$$A10 = -7.5 \times 10^{-9}$$

Aspherical Surface Data of Tenth Surface (r10)

$$A4 = -0.00094$$

$$A6 = 3.4959 \times 10^{-5}$$

$$A8 = -3 \times 10^{-6}$$

Aspherical Surface Data of Twelfth Surface (r12)

$$A4 = -0.00018$$

$$A6 = -6.571 \times 10^{-6}$$

$$A8 = 1.16 \times 10^{-7}$$

$$A10 = 1.25 \times 10^{-8}$$

Aspherical Surface Data of Thirteenth Surface (r13)

$$A4 = 0.000544$$

$$A6 = 1.7189 \times 10^{-5}$$

$$A8 = -9.4 \times 10^{-7}$$

$$A10 = -1.3 \times 10^{-8}$$

Aspherical Surface Data of Fourteenth Surface (r14)

$$A4 = 0.000763$$

$$A6 = -4.062 \times 10^{-5}$$

$$A8 = -9.6 \times 10^{-7}$$

$$A10 = 3.36 \times 10^{-8}$$

Aspherical Surface Data of Fifteenth Surface (r15)

$$A4 = 0.000348$$

$$A6 = -7.975 \times 10^{-6}$$

$$A8 = -3.3 \times 10^{-6}$$

Aspherical Surface Data of Sixteenth Surface (r16)

$$A4= 0.001374$$

$$A6= 6.2198 \times 10^{-5}$$

$$A8= 1.73 \times 10^{-6}$$

Diffraction Surface Data of Fourth Surface (r4)

$$C1=-0.00046$$

$$C2= 8.4405 \times 10^{-7}$$

Diffraction Surface Data of Ninth Surface (r9)

$$C1= 0.002731$$

$$C2=-8.219 \times 10^{-5}$$

Diffraction Surface Data of Thirteenth Surface (r13)

$$C1=-0.00169$$

$$C2= 5.6339 \times 10^{-5}$$

TABLE 2
Construction Data of Example 2

f=5.1~16.0~48.8
 $\omega=31.2\sim 11.0\sim 3.64(^{\circ})$
 FNO=2.75~3.5~4.1

Radius of Curvature	Axial Distance	Refractive Index	Abbe Number
r1*= 15.47			
	d1= 0.30	N1= 1.5644	ν 1= 35.1
r2*#= 8.03			
	d2= 5.08	N2= 1.600	ν 2= 64.38
r3*= -378.30			
	d3= 0.1~5.476~9.457		
r4*= -117.62			
	d4= 0.50	N3= 1.58913	ν 3= 61.11
r5*= 4.31			
	d5= 2.19		
r6*= 9.61			
	d6= 2.14	N4= 1.62017	ν 4= 24.01
r7*#= -5.77			
	d7= 0.50	N5= 1.65446	ν 5= 33.86
r8*= 7.63			
	d8= 16.19~7.114~0.496		
r9= ∞ {Aperture Stop(S)}			
	d9= 0.10		
r10*= 5.31			
	d10= 2.64	N6= 1.58913	ν 6= 61.11
r11*= -8.79			
	d11= 0.01		
r12*= -21.90			
	d12= 4.01	N7= 1.84666	ν 7= 23.82
r13*= 22.30			
	d13= 1.55~5.74~10.58		
r14= ∞			
	d14= 3.40	N8= 1.5168	ν 8= 64.12
r15= ∞			
	d15= 5.66		

$r16 = \infty \{ \text{Image Plane(I)} \}$

Aspherical Surface Data of First Surface (r1)

$$A4 = -1 \times 10^{-5}$$

$$A6 = 8.7235 \times 10^{-7}$$

$$A8 = -1.5 \times 10^{-8}$$

$$A10 = 1.67 \times 10^{-10}$$

Aspherical Surface Data of Second Surface (r2)

$$A4 = 6.28 \times 10^{-5}$$

$$A6 = -1.108 \times 10^{-5}$$

$$A8 = 2.48 \times 10^{-7}$$

$$A10 = -2.4 \times 10^{-9}$$

Aspherical Surface Data of Third Surface (r3)

$$A4 = 3.15 \times 10^{-5}$$

$$A6 = 9.6774 \times 10^{-7}$$

$$A8 = -1.9 \times 10^{-8}$$

$$A10 = 2.77 \times 10^{-10}$$

Aspherical Surface Data of Fourth Surface (r4)

$$A4 = 0.000384$$

$$A6 = 3.3912 \times 10^{-5}$$

$$A8 = -1.5 \times 10^{-6}$$

$$A10 = 1.75 \times 10^{-8}$$

Aspherical Surface Data of Fifth Surface (r5)

$$A4 = -0.002$$

$$A6 = 2.0385 \times 10^{-5}$$

$$A8 = 6.47 \times 10^{-6}$$

$$A10 = -2.2 \times 10^{-7}$$

Aspherical Surface Data of Sixth Surface (r6)

$$A4 = -0.00436$$

$$A6 = 1.3465 \times 10^{-6}$$

$$A8 = 7.78 \times 10^{-6}$$

$$A10 = -3.2 \times 10^{-7}$$

Aspherical Surface Data of Seventh Surface (r7)

$$A4 = -0.00806$$

$$A6 = 0.00028396$$

$$A8 = 2.44 \times 10^{-5}$$
$$A10 = -1.1 \times 10^{-6}$$

Aspherical Surface Data of Eighth Surface (r8)

$$A4 = -0.00495$$
$$A6 = 0.00018033$$
$$A8 = -4.5 \times 10^{-6}$$

Aspherical Surface Data of Ninth Surface (r9)

$$A4 = -0.00088$$
$$A6 = -2.088 \times 10^{-5}$$
$$A8 = -6.1 \times 10^{-6}$$
$$A10 = 1.06 \times 10^{-8}$$

Aspherical Surface Data of Eleventh Surface (r11)

$$A4 = 0.000763$$
$$A6 = -4.062 \times 10^{-5}$$
$$A8 = -9.6 \times 10^{-7}$$
$$A10 = 3.36 \times 10^{-8}$$

Aspherical Surface Data of Twelfth Surface (r12)

$$A4 = 0.000675$$
$$A6 = 9.9201 \times 10^{-6}$$
$$A8 = 2.94 \times 10^{-6}$$

Aspherical Surface Data of Thirteenth Surface (r13)

$$A4 = 0.001621$$
$$A6 = 9.5672 \times 10^{-5}$$
$$A8 = 2.95 \times 10^{-6}$$

Diffraction Surface Data of Second Surface (r2)

$$C1 = -0.00019$$
$$C2 = -7.154 \times 10^{-7}$$

Diffraction Surface Data of Seventh Surface (r7)

$$C1 = 0.000379$$
$$C2 = 5.4451 \times 10^{-5}$$

TABLE 3
Construction Data of Example 3

$f=3.34\sim 5.50\sim 9.65$
 $\omega=29.1\sim 18.7\sim 10.9(^{\circ})$
 $FNO=3\sim 3.5\sim 5.3$

Radius of Curvature	Axial Distance	Refractive Index	Abbe Number
$r1^{*}= 13.55$			
	$d1= 1.09$	$N1= 1.7725$	$\nu 1= 49.77$
$r2^{*}= 4.17$			
	$d2= 1.11$		
$r3^{*}= 6.82$			
	$d3= 2.19$	$N2= 1.65446$	$\nu 2= 33.86$
$r4^{*}\# = 2.30$			
	$d4= 0.65$	$N3= 1.62017$	$\nu 3= 24.01$
$r5^{*}= 4.67$			
	$d5= 6.11\sim 2.68\sim 0.4$		
$r6= \infty$	{Aperture Stop (S)}		
	$d6= 0.00$		
$r7^{*}= 43.18$			
	$d7= 3.26$	$N4= 1.6$	$\nu 4= 64.38$
$r8^{*}\# = -2.02$			
	$d8= 0.41$	$N5= 1.5644$	$\nu 5= 35.1$
$r9^{*}= -3.70$			
	$d9= 0.61\sim 2.87\sim 7.22$		
$r10= \infty$			
	$d10= 3.60$	$N6= 1.5168$	$\nu 6= 64.12$
$r11= \infty$			
	$d11= 5.88$		
$r12= \infty$	{Image Plane (I)}		

Aspherical Surface Data of First Surface (r1)

$A4= 0.009071$
 $A6=-0.0001235$
 $A8=-4.4\times 10^{-6}$

Aspherical Surface Data of Second Surface (r2)

A4= 0.012871
A6= 0.00211106
A8= 9.85×10^{-5}

Aspherical Surface Data of Third Surface (r3)

A4=-0.00584
A6= 0.00141341
A8=-0.00014

Aspherical Surface Data of Fourth Surface (r4)

A4= 0.036276
A6=-0.015181
A8= 0.002011

Aspherical Surface Data of Fifth Surface (r5)

A4=-0.01326
A6= 0.0018055
A8=-0.00037

Aspherical Surface Data of Seventh Surface (r7)

A4=-0.00695
A6=-0.0008778
A8= 0.000301
A10=-0.00013

Aspherical Surface Data of Eighth Surface (r8)

A4=-0.01369
A6= 0.0051316
A8=-0.00021

Aspherical Surface Data of Ninth Surface (r9)

A4= 0.000919
A6=-0.0003216
A8= 3.39×10^{-5}

Diffraction Surface Data of Fourth Surface (r4)

C1= 0.003039
C2=-0.0007736

Diffraction Surface Data of Eighth Surface (r8)

C1=-0.00146
C2= 0.00030703

TABLE 4
Construction Data of Example 4

f=6.68
 $\omega=24.6(^{\circ})$
 FNO=4.1

Radius of Curvature	Axial Distance	Refractive Index	Abbe Number
------------------------	-------------------	---------------------	----------------

r1= ∞ {Aperture Stop (S)}	d1= 0.38		
r2= -2.64	d2= 1.50	N1=1.744	ν 1=44.8
r3*= -2.46	d3= 2.77		
r4*= -5.13	d4= 2.00	N2=1.62017	ν 2=24.01
r5#= 17.33	d5= 2.00	N3=1.6935	ν 3=53.2
r6*= -4.29	d6= 0.10		
r7= ∞	d7= 4.21	N4=1.5168	ν 4=64.12
r8= ∞	d8= 4.00		
r9= ∞ {Image Plane(I)}			

Aspherical Surface Data of Third Surface (r3)

A4= 0.006759
 A6= 0.00076404
 A8= 7.49×10^{-5}

Aspherical Surface Data of Fourth Surface (r4)

A4= 0.005799
 A6=-0.0001718
 A8=- 1.8×10^{-5}

Aspherical Surface Data of Sixth Surface (r6)

A4= 0.002042
 A6= 1.6469×10^{-6}
 A8= 2.4×10^{-6}

Diffractive Surface Data of Fifth Surface (r5)

$$C1 = -0.00151$$

$$C2 = 6.3854 \times 10^{-5}$$

TABLE 5
Construction Data of Comparison Example 1

f=5.1~16.0~48.8
 $\omega=31.3\sim 11.0\sim 3.64(^{\circ})$
 FNO=2.75~3.5~4.1

Radius of Curvature	Axial Distance	Refractive Index	Abbe Number
r1*= 16.06			
	d1= 0.68	N1= 1.80518	ν 1= 25.43
r2= 13.71			
	d2= 0.10		
r3*= 13.31			
	d3= 3.47	N2= 1.600	ν 2= 64.38
r4*#= 404.00			
	d4= 0.05	N3= 1.5644	ν 3= 35.1
r5*= 404.00			
	d5= 0.2997~7.6707~11.50614		
r6*= 12.89			
	d6= 0.66	N4= 1.58913	ν 4= 61.11
r7*= 3.78			
	d7= 2.90		
r8*= -28.23			
	d8= 0.05	N5= 1.62017	ν 5= 24.01
r9*#= -28.23			
	d9= 2.24	N6= 1.65446	ν 6= 33.86
r10*= 65.12			
	d10=17.61083~7.973~0.5		
r11= ∞ {Aperture Stop (S)}			
	d11= 0.10		
r12*= 5.48			
	d12= 2.50	N7= 1.600	ν 7= 64.38
r13*#=-31.40			
	d13= 0.05	N8= 1.5644	ν 8= 35.1
r14*= -31.40			
	d14= 0.28		
r15*= -39.72			
	d15= 3.73	N9= 1.7495	ν 9= 35.17

r16*= 36.21

d16= 6.340415~10.06~16.875505

r17= ∞

d17= 3.40 N10=1.5168 ν 10=64.12

r18= ∞

d18= 1.70

r19= ∞ {Image Plane (I)}

Aspherical Surface Data of First Surface (r1)

A4=-5.5 $\times 10^{-6}$

A6= 2.1002 $\times 10^{-7}$

A8=-2.7 $\times 10^{-9}$

Aspherical Surface Data of Third Surface (r3)

A4=-7.4 $\times 10^{-6}$

A6=-6.535 $\times 10^{-7}$

A8= 5.81 $\times 10^{-9}$

A10=-1.2 $\times 10^{-11}$

Aspherical Surface Data of Fourth Surface (r4)

A4=-2.9 $\times 10^{-6}$

A6=-3.052 $\times 10^{-7}$

A8= 2.75 $\times 10^{-9}$

A10=-1.3 $\times 10^{-11}$

Aspherical Surface Data of Fifth Surface (r5)

A4=-2.9 $\times 10^{-6}$

A6=-3.052 $\times 10^{-7}$

A8= 2.75 $\times 10^{-9}$

A10=-1.3 $\times 10^{-11}$

Aspherical Surface Data of Sixth Surface (r6)

A4= 0.001166

A6=-0.0001044

A8= 3.19 $\times 10^{-6}$

A10=-3.6 $\times 10^{-8}$

Aspherical Surface Data of Seventh Surface (r7)

A4= 0.00122

A6=-0.0001005

$$A8 = 1.02 \times 10^{-6}$$
$$A10 = -1.5 \times 10^{-7}$$

Aspherical Surface Data of Eighth Surface (r8)

$$A4 = -0.00184$$
$$A6 = 9.1967 \times 10^{-5}$$
$$A8 = -2.4 \times 10^{-6}$$
$$A10 = -7.5 \times 10^{-8}$$

Aspherical Surface Data of Ninth Surface (r9)

$$A4 = -0.00184$$
$$A6 = 9.1967 \times 10^{-5}$$
$$A8 = -2.4 \times 10^{-6}$$
$$A10 = -7.5 \times 10^{-8}$$

Aspherical Surface Data of Tenth Surface (r10)

$$A4 = -0.00193$$
$$A6 = 7.4375 \times 10^{-5}$$
$$A8 = -3.6 \times 10^{-6}$$

Aspherical Surface Data of Twelfth Surface (r12)

$$A4 = -6 \times 10^{-5}$$
$$A6 = -8.051 \times 10^{-6}$$
$$A8 = 1.92 \times 10^{-7}$$
$$A10 = 1.27 \times 10^{-8}$$

Aspherical Surface Data of Thirteenth Surface (r13)

$$A4 = 0.000484$$
$$A6 = -4.434 \times 10^{-5}$$
$$A8 = -1.8 \times 10^{-6}$$
$$A10 = 6.09 \times 10^{-8}$$

Aspherical Surface Data of Fourteenth Surface (r14)

$$A4 = 0.000484$$
$$A6 = -4.434 \times 10^{-5}$$
$$A8 = -1.8 \times 10^{-6}$$
$$A10 = 6.09 \times 10^{-8}$$

Aspherical Surface Data of Fifteenth Surface (r15)

$$A4 = 0.000242$$
$$A6 = -2.076 \times 10^{-5}$$

$$A8 = -3.3 \times 10^{-6}$$

Aspherical Surface Data of Sixteenth Surface (r16)

$$A4 = 0.001559$$

$$A6 = 5.5353 \times 10^{-5}$$

$$A8 = 2.83 \times 10^{-6}$$

Diffraction Surface Data of Fourth Surface (r4)

$$C1 = -0.0009$$

$$C2 = 1.8993 \times 10^{-6}$$

Diffraction Surface Data of Ninth Surface (r9)

$$C1 = 0.005716$$

$$C2 = -2.475 \times 10^{-5}$$

Diffraction Surface Data of Thirteenth Surface (r13)

$$C1 = -0.00269$$

$$C2 = 5.7229 \times 10^{-5}$$

TABLE 6

Example	Unit	Diffractional Lens	h_0 (μm)	d_{min} (μm)	Blaze Vertex Angle $\Theta(^{\circ})$ at d_{min}
1	Gr1	L2DOE	15.2	108	82
	Gr2	L4DOE	6.3	69	85
	Gr3	L5DOE	15.2	117	83
2	Gr1	L1DOE	16.5	147	84
	Gr2	L3DOE	17.1	83	78
3	Gr1	L2DOE	17.1	177	84
	Gr2	L3DOE	16.5	917	89
4	Gr1	L2DOE	7.9	243	88
Comparison Example 1	Gr1	L2DOE	16.5	36	65
	Gr2	L4DOE	17.1	10	30
	Gr3	L5DOE	16.5	32	63

TABLE 7

Example	Unit	Lens	ϕp or ϕDOE	$\phi p/\nu d$ or $\phi DOE/\nu DOE$	Value of Condition (1): $(\phi p/\nu d)/(\phi DOE/\nu DOE)$
1	Gr1	L2DOE	0.00091116	-0.0002641	0.15
		L2p	-0.0013648	-3.888×10^{-5}	
	Gr2	L4p	0.02388635	0.00099485	0.63
		L4DOE	-0.005462	0.00158319	
	Gr3	L5DOE	0.0033754	-0.0009784	0.66
		L5p	-0.022576	-0.0006432	
2	Gr1	L1p	-0.0333112	-0.000949	8.70
		L1DOE	0.00037642	-0.0001091	
	Gr2	L3p	0.16285393	0.00678275	30.84
		L3DOE	-0.0007588	0.00021994	
3	Gr1	L2DOE	-0.0060784	0.00176186	3.57
		L2p	0.15097448	0.00628798	
	Gr2	L3DOE	0.0029188	-0.000846	3.89
		L3p	-0.0007588	-0.0032921	
4	Gr1	L2p	-0.1619081	-0.0067434	7.70
		L2DOE	0.0030216	-0.0008758	
Comparison Example 1	Gr1	L2DOE	0.00180948	-0.0005245	0
		L2p	0	0	
	Gr2	L4p	0	0	0
		L4DOE	-0.011432	0.00331362	
	Gr3	L5DOE	0.0053898	-0.0015623	0
		L5p	0	0	

TABLE 8

Example	Unit	Lens	Axial Distance	Value of Condition (2) : tp/tg
1	Gr1	L2g	2.99	0.11
		L2p	0.34	
	Gr2	L4p	0.69	1.38
		L4g	0.5	
	Gr3	L5g	2.99	0.18
		L5p	0.53	
2	Gr1	L1p	0.3	0.06
		L1g	5.08	
	Gr2	L3p	2.14	4.28
		L3g	0.5	
3	Gr1	L2g	2.19	0.30
		L2p	0.65	
	Gr2	L3g	3.26	0.13
		L3p	0.41	
4	Gr1	L2p	2.00	1.00
		L2g	2.00	
Comparison Example 1	Gr1	L2g	3.47	0.01
		L2p	0.05	
	Gr2	L4p	0.05	0.02
		L4g	2.24	
	Gr3	L5g	2.5	0.02
		L5p	0.05	

TABLE 9
Construction Data of Example 5

f= 4.1~ 6.9~11.75
 $\omega=39.1\sim24.2\sim14.8(^{\circ})$
 FNO= 4.1~ 4.1~ 4.1

Radius of Curvature	Axial Distance	Refractive Index	Abbe Number
r1*=-199.087			
	d1= 0.20	N1=1.62	ν 1=60.3
r2= 6.18			
	d2= 0.82		
r3= 6.66			
	d3= 1.37	N2=1.755	ν 2=27.6
r4= 8.70			
	d4= 15.0~5.9~0.3		
r5*= 10.46			
	d5= 3.72	N3=1.5	ν 3=69
r6#= -4.01			
	d6= 1.27	N4=1.741	ν 4=28.6
r7*= -5.96			
	d7= 0.1~2.7~7.3		
r8= ∞ (S)			
	d8= 0.10		
r9= 1.94			
	d9= 0.30	N5=1.746	ν 5=39.4
r10= 2.09			
	d10= 2.37		
r11*= -1.85			
	d11= 1.01	N6=1.755	ν 6=27.6
r12*= -3.83			
	d12= 0.17		
r13*= 4.89			
	d13= 1.79	N7=1.487	ν 7=70.4
r14*=-10.78			
	d14= 0.10		
r15= ∞			
	d15= 3.40	N8=1.517	ν 8=64.1

$$r16 = \infty$$

$$d16 = 2.40$$

$$r17 = \infty (I)$$

Aspherical Surface Data of First Surface (r1)

$$A = 2.33 \times 10^{-4}, B = -1.80 \times 10^{-6}, C = 1.66 \times 10^{-8}$$

Aspherical Surface Data of Fifth Surface (r5)

$$A = -7.21 \times 10^{-4}, B = -1.77 \times 10^{-5}, C = -5.35 \times 10^{-7}$$

Aspherical Surface Data of Seventh Surface (r7)

$$A = 6.72 \times 10^{-5}, B = -7.66 \times 10^{-6}, C = -7.23 \times 10^{-9}$$

Aspherical Surface Data of Eleventh Surface (r11)

$$A = 5.01 \times 10^{-2}, B = 1.22 \times 10^{-3}, C = -2.03 \times 10^{-3}$$

Aspherical Surface Data of Twelfth Surface (r12)

$$A = 2.24 \times 10^{-2}, B = 2.35 \times 10^{-3}, C = -5.63 \times 10^{-4}$$

Aspherical Surface Data of Thirteenth Surface (r13)

$$A = -1.24 \times 10^{-2}, B = 1.51 \times 10^{-3}, C = -8.17 \times 10^{-5}$$

Aspherical Surface Data of Fourteenth Surface (r14)

$$A = -8.52 \times 10^{-3}, B = -1.82 \times 10^{-4}, C = 3.67 \times 10^{-5}$$

Diffractive Surface Data of Sixth Surface (r6)

$$C1 = -6.82 \times 10^{-4}, C2 = 3.33 \times 10^{-5}$$

Values corresponding to Conditions

$$\text{Condition(3): } \phi_{\text{doe}} / \phi_{\text{gr2}} = 0.013$$

$$\text{Condition(4): } tW / fW = 0.20$$

$$\text{Condition(5): } tT / fT = 0.68$$

$$\text{Condition(6) (At Wide-angle End [W] and Telephoto End [T]): } |Y'_{\text{max}} / PZ| = 0.27$$

TABLE 10
Construction Data of Comparison Example 2

f= 4.1~ 6.9~11.75
 $\omega=39.3\sim24.2\sim14.8(^{\circ})$
 FNO= 4.1~ 4.1~ 4.1

Radius of Curvature	Axial Distance	Refractive Index	Abbe Number
r1*=-1227.278			
	d1= 1.40	N1=1.773	ν 1=49.8
r2= 6.46	d2= 0.81		
r3= 7.13	d3= 2.51	N2=1.799	ν 2=22.6
r4= 9.68	d4= 13.4~5.6~0.9		
r5*= 9.38	d5= 4.13	N3=1.517	ν 3=69.4
r6= -4.30	d6= 1.60	N4=1.843	ν 4=23.7
r7*= -6.28	d7= 0.5~3.6~9.1		
r8= ∞ (S)	d8= 0.10		
r9= 2.33	d9= 0.98	N5=1.646	ν 5=31.9
r10= 1.92	d10= 1.79		
r11*= -2.33	d11= 0.65	N6=1.799	ν 6=22.6
r12*= -3.97	d12= 0.10		
r13*= 7.65	d13= 2.39	N7=1.530	ν 7=67.6
r14*= -5.94	d14= 0.30		
r15= ∞	d15= 3.40	N8=1.517	ν 8=64.1

$$r16 = \infty$$

$$d16 = 2.40$$

$$r17 = \infty (I)$$

Aspherical Surface Data of First Surface (r1)

$$A = 1.87 \times 10^{-4}, B = -1.25 \times 10^{-6}, C = 9.52 \times 10^{-9}$$

Aspherical Surface Data of Fifth Surface (r5)

$$A = -6.17 \times 10^{-4}, B = -1.66 \times 10^{-5}, C = -1.47 \times 10^{-7}$$

Aspherical Surface Data of Seventh Surface (r7)

$$A = 1.11 \times 10^{-4}, B = -5.37 \times 10^{-6}, C = 9.83 \times 10^{-8}$$

Aspherical Surface Data of Eleventh Surface (r11)

$$A = 3.86 \times 10^{-2}, B = 1.82 \times 10^{-3}, C = -1.78 \times 10^{-3}$$

Aspherical Surface Data of Twelfth Surface (r12)

$$A = 2.31 \times 10^{-2}, B = 2.86 \times 10^{-3}, C = -8.77 \times 10^{-4}$$

Aspherical Surface Data of Thirteenth Surface (r13)

$$A = -7.05 \times 10^{-3}, B = 1.65 \times 10^{-3}, C = -1.35 \times 10^{-4}$$

Aspherical Surface Data of Fourteenth Surface (r14)

$$A = -4.00 \times 10^{-3}, B = -3.30 \times 10^{-4}, C = 3.88 \times 10^{-5}$$

TABLE 11

Chromatic Aberration Coefficients in Comparison Example 2
(having no diffractive lens element)

			Whole	First unit	Second unit	Third unit
Chromatic Aberration Coefficients	W	LC	13	-8	25	-4
		TC	32	28	15	-10
	T	LC	1	-8	10	0
		TC	-15	75	-80	-10

TABLE 12

Chromatic Aberration Coefficients in Example 5
(having diffractive lens element in Second Lens Unit)

			Whole	First unit	Second unit		Third unit
					Whole	Diffractive Lens Element	
Chromatic Aberration Coefficients	W	LC	9	-5	14	-17	0
		TC	32	29	9	3	-6
	T	LC	0	-5	5	-5	0
		TC	3	47	-37	44	-6

TABLE 13

Data on Glass Material

Glass Material	nd	ν d
Low Refractive Index/Low Dispersion	1.5	60
High Refractive Index/High Dispersion	1.8	30
Diffractive Lens Surface	∞	-3.45

TABLE 14

Aberration Coefficients of Models (a) to (c)

Lens Position	Aberration Coefficients	(a)	(b)	(c)	
				Low Refractive Index /Low Dispersion	High Refractive Index /High Dispersion
Without Regard to Position	PT	0.778	0.759	0.63	0.498
Front side of Aperture Stop	AS	1.964	1.027	1.601	1.333
Aperture Position	AS	1	1	1	1

TABLE 15

Aberration Coefficients in Comparison Example 2 and Example 5

			Whole	First Unit	Second Unit	Third Unit
Comparison Example 2	W	AS	39	629	258	-848
	T	AS	401	433	815	-848
	PT		201	-514	821	-107
Example 5	W	AS	-80	624	435	-1139
	T	AS	282	834	586	-1137
	PT		245	-487	803	-71

TABLE 16
Construction Data of Example 6

f= 5.2 ~12.2~29.4
 $\omega=30.9 \sim 14.2 \sim 6.0(^{\circ})$
 FNO= 2.75~ 3.5~ 4.1

Radius of Curvature	Axial Distance	Refractive Index	Abbe Number
r1*= 9.99			
	d1= 0.28	N1=1.755	ν 1=27.6
r2*= 6.17			
	d2= 2.41	N2=1.667	ν 2=52.6
r3*= 59.98			
	d3= 0.3~2.8~5.9		
r4*= 23.81			
	d4= 0.28	N3=1.72	ν 3=50.3
r5*= 3.63			
	d5= 2.15		
r6*= 19.99			
	d6= 1.56	N4=1.805	ν 4=25.4
r7= -4.72			
	d7= 0.28	N5=1.75	ν 5=35.2
r8*= 12.50			
	d8=12.8~5.1~0.1		
r9= ∞ (S)			
	d9= 0.10		
r10*= 5.63			
	d10=2.97	N6=1.713	ν 6=53.9
r11*#=-8.33			
	d11=0.10		
r12*= -6.42			
	d12=1.34	N7=1.805	ν 7=25.4
r13*=-27.54			
	d13=6.53~10.3~14.6		
r14= ∞			
	d14=3.40	N8=1.517	ν 8=64.1
r15= ∞			
	d15=1.42		
r16= ∞ (I)			

Aspherical Surface Data of First Surface (r1)

$$A=-1.14 \times 10^{-4}, B=3.31 \times 10^{-6}, C=-1.21 \times 10^{-7}, D=2.55 \times 10^{-9}$$

Aspherical Surface Data of Second Surface (r2)

$$A=-8.21 \times 10^{-4}, B=3.13 \times 10^{-5}, C=-1.58 \times 10^{-6}, D=2.13 \times 10^{-8}$$

Aspherical Surface Data of Third Surface (r3)

$$A=-5.33 \times 10^{-6}, B=-1.34 \times 10^{-7}, C=6.52 \times 10^{-8}, D=-2.45 \times 10^{-10}$$

Aspherical Surface Data of Fourth Surface (r4)

$$A=-1.90 \times 10^{-4}, B=2.79 \times 10^{-6}, C=1.01 \times 10^{-6}, D=-2.38 \times 10^{-8}$$

Aspherical Surface Data of Fifth Surface (r5)

$$A=-1.93 \times 10^{-3}, B=-2.31 \times 10^{-5}, C=-3.04 \times 10^{-6}, D=-1.01 \times 10^{-7}$$

Aspherical Surface Data of Sixth Surface (r6)

$$A=-3.98 \times 10^{-3}, B=7.53 \times 10^{-5}, C=-2.21 \times 10^{-6}, D=-2.84 \times 10^{-8}$$

Aspherical Surface Data of Eighth Surface (r8)

$$A=-4.40 \times 10^{-3}, B=1.48 \times 10^{-4}, C=-5.67 \times 10^{-6}$$

Aspherical Surface Data of Tenth Surface (r10)

$$A=-7.81 \times 10^{-4}, B=-5.46 \times 10^{-5}, C=-7.39 \times 10^{-6}, D=-4.74 \times 10^{-7}$$

Aspherical Surface Data of Eleventh Surface (r11)

$$A=1.99 \times 10^{-3}, B=-1.56 \times 10^{-4}, C=-1.40 \times 10^{-5}, D=7.32 \times 10^{-7}$$

Aspherical Surface Data of Twelfth Surface (r12)

$$A=8.10 \times 10^{-3}, B=-2.30 \times 10^{-4}, C=4.00 \times 10^{-6}$$

Aspherical Surface Data of Thirteenth Surface (r13)

$$A=6.58 \times 10^{-3}, B=6.09 \times 10^{-5}, C=1.33 \times 10^{-5}$$

Diffraction Surface Data of Eleventh Surface (r11)

$$C1=-1.28 \times 10^{-3}, C2=3.05 \times 10^{-5}$$

Values corresponding to Conditions

Condition(7): $\phi_{\text{doe}}/\phi_{\text{gr3}}=0.021$

Condition(8): $\text{tw}/\text{fw}=0.35$

Condition(9) (At Wide-angle End [W]): $|Y'_{\text{max}}/\text{PZ}|=0.24$

Condition(9) (At Telephoto End [T]): $|Y'_{\text{max}}/\text{PZ}|=0.15$

TABLE 17
Construction Data of Comparison Example 3

$f = 5.2 \sim 12.2 \sim 29.4$

$\omega = 31.0 \sim 14.2 \sim 6.0(^{\circ})$

$FNO = 2.75 \sim 3.5 \sim 4.1$

Radius of Curvature	Axial Distance	Refractive Index	Abbe Number
$r1^* = 12.39$	$d1 = 0.28$	$N1 = 1.697$	$\nu 1 = 30.4$
$r2^* = 5.94$	$d2 = 2.91$	$N2 = 1.675$	$\nu 2 = 51.5$
$r3^* = 109.43$	$d3 = 0.3 \sim 3.2 \sim 6.7$		
$r4^* = 158.75$	$d4 = 0.28$	$N3 = 1.72$	$\nu 3 = 50.3$
$r5^* = 4.24$	$d5 = 1.98$		
$r6^* = 21.94$	$d6 = 1.58$	$N4 = 1.805$	$\nu 4 = 25.4$
$r7 = -4.79$	$d7 = 0.28$	$N5 = 1.75$	$\nu 5 = 35.2$
$r8^* = 15.57$	$d8 = 13.9 \sim 5.4 \sim 0.1$		
$r9 = \infty (S)$	$d9 = 0.10$		
$r10^* = 5.92$	$d10 = 3.39$	$N6 = 1.713$	$\nu 6 = 53.9$
$r11^* = -5.99$	$d11 = 0.10$		
$r12^* = -5.70$	$d12 = 1.65$	$N7 = 1.805$	$\nu 7 = 25.4$
$r13^* = -50.19$	$d13 = 6.58 \sim 10.2 \sim 14.3$		
$r14 = \infty$	$d14 = 3.40$	$N8 = 1.517$	$\nu 8 = 64.1$
$r15 = \infty$	$d15 = 1.00$		
$r16 = \infty (I)$			

Aspherical Surface Data of First Surface (r1)

$$A=-5.36 \times 10^{-6}, B=1.43 \times 10^{-6}, C=-2.28 \times 10^{-8}, D=7.88 \times 10^{-10}$$

Aspherical Surface Data of Second Surface (r2)

$$A=-1.26 \times 10^{-3}, B=6.23 \times 10^{-5}, C=-2.44 \times 10^{-6}, D=2.46 \times 10^{-8}$$

Aspherical Surface Data of Third Surface (r3)

$$A=8.05 \times 10^{-5}, B=-1.51 \times 10^{-6}, C=1.16 \times 10^{-7}, D=-1.19 \times 10^{-9}$$

Aspherical Surface Data of Fourth Surface (r4)

$$A=7.22 \times 10^{-4}, B=9.51 \times 10^{-6}, C=-1.11 \times 10^{-6}, D=1.62 \times 10^{-8}$$

Aspherical Surface Data of Fifth Surface (r5)

$$A=-1.01 \times 10^{-3}, B=1.17 \times 10^{-4}, C=-3.54 \times 10^{-6}, D=4.70 \times 10^{-7}$$

Aspherical Surface Data of Sixth Surface (r6)

$$A=-4.04 \times 10^{-3}, B=7.04 \times 10^{-5}, C=4.41 \times 10^{-6}, D=-3.40 \times 10^{-7}$$

Aspherical Surface Data of Eighth Surface (r8)

$$A=-4.01 \times 10^{-3}, B=1.34 \times 10^{-4}, C=-5.00 \times 10^{-6}$$

Aspherical Surface Data of Tenth Surface (r10)

$$A=-8.75 \times 10^{-4}, B=-5.15 \times 10^{-5}, C=-4.27 \times 10^{-6}, D=-5.78 \times 10^{-7}$$

Aspherical Surface Data of Eleventh Surface (r11)

$$A=2.32 \times 10^{-3}, B=-9.64 \times 10^{-5}, C=-1.10 \times 10^{-5}, D=6.38 \times 10^{-7}$$

Aspherical Surface Data of Twelfth Surface (r12)

$$A=6.91 \times 10^{-3}, B=-2.33 \times 10^{-4}, C=1.10 \times 10^{-5}$$

Aspherical Surface Data of Thirteenth Surface (r13)

$$A=5.28 \times 10^{-3}, B=-2.64 \times 10^{-5}, C=1.67 \times 10^{-5}$$

TABLE 18

Chromatic Aberration Coefficients in Comparison Example 3
(having no diffractive lens element)

			Whole	First unit	Second unit	Third unit
Chromatic Aberration Coefficients	W	LC	12	1	0	15
		TC	32	-6	48	-19
	T	LC	0	1	-1	0
		TC	16	-17	58	-31

TABLE 19

Chromatic Aberration Coefficients in Example 6
(having diffractive lens element in Third Lens Unit)

			Whole	First unit	Second unit	Third unit	
						Whole	Diffractive Lens Element
Chromatic Aberration Coefficients	W	LC	2	2	-2	6	-33
		TC	33	-18	61	-19	-12
	T	LC	0	2	-2	0	-3
		TC	0	-39	63	-30	-12

TABLE 20

Data on Glass Material

Glass Material	nd	ν d
Low Refractive Index/Low Dispersion	1.5	60
High Refractive Index/High Dispersion	1.8	30
Diffractive Lens Surface	∞	-3.45

TABLE 21

Aberration Coefficients of Models (a) to (c)

Lens Position	Aberration Coefficients	(a)	(b)	(c)	
				Low Refractive Index /Low Dispersion	High Refractive Index /High Dispersion
Without Regard to Position	PT	0.778	0.759	0.63	0.498
Aperture Position	AS	1	1	1	1
Behind Aperture Stop	AS	0.036	0.973	1.366	1.138

TABLE 22

Aberration Coefficients in Comparison Example 3 and Example 6

			Whole	First Unit	Second Unit	Third Unit
Comparison Example 3	W	AS	554	512	-76	194
	T	AS	79	658	-531	-18
	PT		-5	282	-991	705
Example 6	W	AS	537	359	-81	335
	T	AS	79	344	-405	169
	PT		-33	315	-1055	707

TABLE 23
Construction Data of Example 7

$f = 5.1 \sim 12.0 \sim 29.4$
 $\omega = 33.2 \sim 14.5 \sim 6.0(^{\circ})$
 $FNO = 2.96 \sim 3.4 \sim 4.1$

Radius of Curvature	Axial Distance	Refractive Index	Abbe Number
r1= 77.00			
	d1= 0.24	N1= 1.833	$\nu 1 = 21$
r2= 20.26			
	d2= 1.60	N2= 1.732	$\nu 2 = 45.7$
r3= -75.04			
	d3= 0.10		
r4= 13.38			
	d4= 1.07	N3= 1.686	$\nu 3 = 50.2$
r5= 28.58			
	d5= 0.5~5.8~9.9		
r6*= 44.71			
	d6= 0.24	N4= 1.773	$\nu 4 = 49.8$
r7*= 6.12			
	d7= 2.33		
r8= -8.83			
	d8= 0.24	N5= 1.773	$\nu 5 = 49.8$
r9= 9.66			
	d9= 0.01	N6= 1.514	$\nu 6 = 57$
r10= 9.66			
	d10= 0.76	N7= 1.833	$\nu 7 = 21$
r11= -41.63			
	d11= 9.9~4.6~0.5		
r12= ∞ (S)			
	d12= 0.50		
r13= 8.33			
	d13= 0.57	N8= 1.694	$\nu 8 = 53.2$
r14#=109.14			
	d14= 0.24	N9= 1.62	$\nu 9 = 24$
r15*= 15.20			
	d15= 5.1~2.7~0.1		
r16= 5.65			

$d16 = 4.16$ $N10 = 1.676$ $\nu 10 = 50.6$
 $r17 = -13.61$
 $d17 = 0.10$
 $r18^* = -29.14$
 $d18 = 0.51$ $N11 = 1.847$ $\nu 11 = 23.8$
 $r19^* = 11.83$
 $d19 = 1 \sim 3.4 \sim 6.0$
 $r20 = \infty$
 $d20 = 3.40$ $N12 = 1.517$ $\nu 12 = 64.1$
 $r21 = \infty$
 $d21 = 4.97$
 $r22 = \infty (I)$

Aspherical Surface Data of Sixth Surface (r6)

$A = 1.98 \times 10^{-4}$, $B = 2.18 \times 10^{-5}$, $C = -5.66 \times 10^{-7}$

Aspherical Surface Data of Seventh Surface (r7)

$A = 9.23 \times 10^{-5}$, $B = 2.98 \times 10^{-5}$, $C = 1.83 \times 10^{-6}$

Aspherical Surface Data of Fifteenth Surface (r15)

$A = 1.59 \times 10^{-4}$, $B = 3.82 \times 10^{-5}$, $C = -8.18 \times 10^{-6}$, $D = 6.25 \times 10^{-7}$

Aspherical Surface Data of Eighteenth Surface (r18)

$A = 1.60 \times 10^{-3}$, $B = -1.84 \times 10^{-4}$, $C = 2.09 \times 10^{-6}$

Aspherical Surface Data of Nineteenth Surface (r19)

$A = 4.01 \times 10^{-3}$, $B = -7.71 \times 10^{-5}$, $C = 4.53 \times 10^{-6}$

Diffraction Surface Data of Fourteenth Surface (r14)

$C1 = -9.46 \times 10^{-4}$, $C2 = 2.73 \times 10^{-5}$

Values corresponding to Conditions

Condition(10): $\phi_{\text{doe}} / \phi_{\text{gr3}} = 0.042$

Condition(11): $tW / fW = 0.16$

Condition(12) (At Wide-angle End [W]): $|Y'_{\text{max}} / PZ| = 0.18$

Condition(12) (At Telephoto End [T]): $|Y'_{\text{max}} / PZ| = 0.19$

TABLE 24
Construction Data of Example 8

f= 5.1 ~12.0~29.4
 $\omega=33.2 \sim 14.5 \sim 6.0(^{\circ})$
 FNO= 2.96~ 3.4~ 4.1

Radius of Curvature	Axial Distance	Refractive Index	Abbe Number
r1= 15.40			
	d1= 0.25	N1= 1.833	ν 1= 21
r2= 9.27	d2= 0.10		
r3*= 7.69	d3= 1.92	N2= 1.668	ν 2= 52.4
r4= -66.59	d4= 0.5~4.0~6.5		
r5= 25.06	d5= 0.25	N3= 1.773	ν 3= 49.8
r6*= 4.41	d6= 1.66		
r7*= -17.55	d7= 0.25	N4= 1.694	ν 4= 53.2
r8#= 4.56	d8= 0.74	N5= 1.62	ν 5= 24
r9= 27.33	d9= 6.5~3.0~0.5		
r10= ∞ (S)	d10= 0.10		
r11*= 8.36	d11= 0.53	N6= 1.694	ν 6= 53.2
r12#= 25.60	d12= 0.25	N7= 1.62	ν 7= 24
r13*= 26.12	d13= 6.1~3.4~0.1		
r14*= 4.52	d14= 2.20	N8= 1.452	ν 8= 52.2
r15= -20.82	d15= 0.10		
r16*= 53.02			

$d16= 1.22 \quad N9= 1.847 \quad \nu 9= 23.8$
 $r17*= 7.82$
 $d17= 1\sim 3.7\sim 7.0$
 $r18= \infty$
 $d18= 3.40 \quad N10=1.517 \quad \nu 10=64.1$
 $r19= \infty$
 $d19= 4.91$
 $r20= \infty (I)$

Aspherical Surface Data of Third Surface (r3)
 $A=-1.25 \times 10^{-4}, B=-1.06 \times 10^{-6}, C=-4.87 \times 10^{-8}$

Aspherical Surface Data of Sixth Surface (r6)
 $A=-3.28 \times 10^{-4}, B= 6.87 \times 10^{-5}, C=-4.27 \times 10^{-6}$

Aspherical Surface Data of Seventh Surface (r7)
 $A=-4.26 \times 10^{-3}, B= 2.75 \times 10^{-4}, C=-2.03 \times 10^{-5}$

Aspherical Surface Data of Eleventh Surface (r11)
 $A= 8.72 \times 10^{-4}, B=-1.08 \times 10^{-4}, C= 2.32 \times 10^{-5}$

Aspherical Surface Data of Thirteenth Surface (r13)
 $A= 1.24 \times 10^{-3}, B=-7.98 \times 10^{-5}, C= 1.54 \times 10^{-5}, D= 1.02 \times 10^{-6}$

Aspherical Surface Data of Fourteenth Surface (r14)
 $A=-4.03 \times 10^{-4}, B=-3.29 \times 10^{-5}, C=-3.90 \times 10^{-6}$

Aspherical Surface Data of Sixteenth Surface (r16)
 $A= 1.96 \times 10^{-3}, B= 2.36 \times 10^{-5}, C=-2.19 \times 10^{-6}$

Aspherical Surface Data of Seventeenth Surface (r17)
 $A= 5.41 \times 10^{-3}, B= 2.47 \times 10^{-4}, C= 1.09 \times 10^{-5}$

Diffractive Surface Data of Eighth Surface (r8)
 $C1= 2.69 \times 10^{-3}, C2=-2.58 \times 10^{-4}, C3=-1.52 \times 10^{-5}$

Diffractive Surface Data of Twelfth Surface (r12)
 $C1=-2.26 \times 10^{-3}, C2=3.48 \times 10^{-5}, C3=5.95 \times 10^{-6}$

Values corresponding to Conditions
 Condition(10): $\phi_{doe}/\phi_{gr3}=0.073$

Condition(11): $tW/fW=0.08$

Condition(12) (At Wide-angle End [W]): $|Y'max/PZ|=0.17$

Condition(12) (At Telephoto End [T]): $|Y'max/PZ|=0.19$

TABLE 25
Construction Data of Example 9

$f = 5.1 \sim 12.0 \sim 29.4$
 $\omega = 33.3 \sim 14.5 \sim 6.0(^{\circ})$
 $FNO = 2.96 \sim 3.43 \sim 4.1$

Radius of Curvature	Axial Distance	Refractive Index	Abbe Number
$r1 = 35.68$			
	$d1 = 0.22$	$N1 = 1.833$	$\nu 1 = 21$
$r2 = 16.60$			
	$d2 = 2.32$	$N2 = 1.705$	$\nu 2 = 48.1$
$r3 = -178.64$			
	$d3 = 0.10$		
$r4 = 11.59$			
	$d4 = 1.14$	$N3 = 1.654$	$\nu 3 = 54.4$
$r5 = 18.42$			
	$d5 = 0.50 \sim 6.0 \sim 10.1$		
$r6^* = 16.67$			
	$d6 = 0.22$	$N4 = 1.773$	$\nu 4 = 49.8$
$r7^* = 5.40$			
	$d7 = 1.90$		
$r8 = -12.34$			
	$d8 = 0.22$	$N5 = 1.773$	$\nu 5 = 49.8$
$r9 = 6.14$			
	$d9 = 0.01$	$N6 = 1.514$	$\nu 6 = 57$
$r10 = 6.14$			
	$d10 = 0.81$	$N7 = 1.833$	$\nu 6 = 21$
$r11 = 28.95$			
	$d11 = 10.1 \sim 4.6 \sim 0.5$		
$r12 = \infty (S)$			
	$d12 = 0.50$		
$r13 = 6.70$			
	$d13 = 0.53$	$N8 = 1.694$	$\nu 8 = 53.2$
$r14\# = 23.76$			
	$d14 = 0.22$	$N9 = 1.62$	$\nu 9 = 24$
$r15^* = 14.06$			
	$d15 = 4.3 \sim 2.4 \sim 0.1$		
$r16 = 5.90$			

$d_{16}= 4.06 \quad N_{10}=1.666 \quad \nu_{10}=52.7$
 $r_{17}= -9.13$
 $d_{17}= 0.10$
 $r_{18*}=-12.93$
 $d_{18}= 0.22 \quad N_{11}=1.847 \quad \nu_{11}=23.8$
 $r_{19*}= 25.63$
 $d_{19}= 1\sim 3\sim 5.2$
 $r_{20}= -7.70$
 $d_{20}= 2.00 \quad N_{12}=1.755 \quad \nu_{12}=27.6$
 $r_{21}= -9.76$
 $d_{21}= 0.25$
 $r_{22}= \infty$
 $d_{22}= 3.40 \quad N_{13}=1.517 \quad \nu_{13}=64.1$
 $r_{23}= \infty$
 $d_{23}= 3.40$
 $r_{24}= \infty (I)$

Aspherical Surface Data of Sixth Surface (r6)

$A=-1.03 \times 10^{-3}, B= 1.20 \times 10^{-4}, C=-2.65 \times 10^{-6}$

Aspherical Surface Data of Seventh Surface (r7)

$A=-1.02 \times 10^{-3}, B= 7.26 \times 10^{-5}, C= 6.52 \times 10^{-6}$

Aspherical Surface Data of Fifteenth Surface (r15)

$A= 2.18 \times 10^{-4}, B= 3.14 \times 10^{-5}, C=-6.47 \times 10^{-6}, D= 6.70 \times 10^{-7}$

Aspherical Surface Data of Eighteenth Surface (r18)

$A= 1.97 \times 10^{-3}, B=-2.51 \times 10^{-4}, C= 2.20 \times 10^{-6}$

Aspherical Surface Data of Nineteenth Surface (r19)

$A= 4.27 \times 10^{-3}, B=-1.41 \times 10^{-4}, C= 3.02 \times 10^{-6}$

Diffraction Surface Data of Fourteenth Surface (r14)

$C_1=-1.20 \times 10^{-3}, C_2=2.38 \times 10^{-5}$

Values corresponding to Conditions

Condition(10): $\phi_{\text{doe}}/\phi_{\text{gr3}}=0.039$

Condition(11): $tW/fW=0.16$

Condition(12) (At Wide-angle End [W]): $|Y'_{\text{max}}/PZ|=0.17$

Condition(12) (At Telephoto End [T]): $|Y'_{\text{max}}/PZ|=0.19$

TABLE 26
Construction Data of Example 10

$f = 5.1 \sim 12.0 \sim 29.4$
 $\omega = 33.2 \sim 14.5 \sim 6.0(^{\circ})$
 $FNO = 2.96 \sim 3.43 \sim 4.1$

Radius of Curvature	Axial Distance	Refractive Index	Abbe Number
r1= 88.87			
	d1= 0.22	N1= 1.833	ν 1= 21
r2= 19.88			
	d2= 1.73	N2= 1.728	ν 2= 46
r3= -58.73			
	d3= 0.10		
r4= 13.51			
	d4= 1.05	N3= 1.686	ν 3= 50.2
r5= 28.21			
	d5= 0.5~5.5~9.8		
r6*= 23.58			
	d6= 0.22	N4= 1.773	ν 4= 49.8
r7*= 5.96			
	d7= 1.96		
r8= -10.50			
	d8= 0.22	N5= 1.773	ν 5= 49.8
r9= 6.76			
	d9= 0.01	N6= 1.514	ν 6= 57
r10= 6.76			
	d10= 0.83	N7= 1.833	ν 6= 21
r11= 114.41			
	d11=10.8~4.9~0.5		
r12= ∞ (S)			
	d12= 0.50		
r13= 5.95			
	d13= 0.74	N8= 1.694	ν 8= 53.2
r14#=-276.97			
	d14= 0.22	N9= 1.62	ν 9= 24
r15*= 14.65			
	d15= 0.01~0.9~1		
r16= 6.40			

$d_{16} = 1.00$ $N_{10} = 1.755$ $\nu_{10} = 27.6$
 $r_{17}^* = 5.02$
 $d_{17} = 6.1 \sim 3.4 \sim 1$
 $r_{18} = 4.77$
 $d_{18} = 2.93$ $N_{11} = 1.66$ $\nu_{11} = 43.4$
 $r_{19} = -18.69$
 $d_{19} = 0.27$
 $r_{20}^* = -19.29$
 $d_{20} = 0.22$ $N_{12} = 1.847$ $\nu_{12} = 23.8$
 $r_{21}^* = 11.94$
 $d_{21} = 1 \sim 3.6 \sim 6.1$
 $r_{22} = \infty$
 $d_{22} = 3.40$ $N_{13} = 1.517$ $\nu_{13} = 64.1$
 $r_{23} = \infty$
 $d_{23} = 3.49$
 $r_{24} = \infty (I)$

Aspherical Surface Data of Sixth Surface (r6)

$A = -3.69 \times 10^{-4}$, $B = 4.50 \times 10^{-5}$, $C = -9.55 \times 10^{-7}$

Aspherical Surface Data of Seventh Surface (r7)

$A = -4.32 \times 10^{-4}$, $B = 3.68 \times 10^{-5}$, $C = 1.77 \times 10^{-6}$

Aspherical Surface Data of Fifteenth Surface (r15)

$A = 6.37 \times 10^{-4}$, $B = 2.58 \times 10^{-5}$, $C = -1.08 \times 10^{-5}$, $D = 9.99 \times 10^{-7}$

Aspherical Surface Data of Seventeenth Surface (r17)

$A = -3.92 \times 10^{-4}$, $B = 3.83 \times 10^{-5}$, $C = -1.29 \times 10^{-6}$

Aspherical Surface Data of Twentieth Surface (r20)

$A = 1.53 \times 10^{-3}$, $B = -1.49 \times 10^{-4}$, $C = 2.09 \times 10^{-6}$

Aspherical Surface Data of Twenty-first Surface (r21)

$A = 4.22 \times 10^{-3}$, $B = -4.32 \times 10^{-5}$, $C = 7.38 \times 10^{-6}$

Diffraction Surface Data of Fourteenth Surface (r14)

$C_1 = -1.15 \times 10^{-3}$, $C_2 = 4.13 \times 10^{-5}$

Values corresponding to Conditions

Condition(10): $\phi_{\text{doe}} / \phi_{\text{gr3}} = 0.029$

Condition(11): $tW / fW = 0.18$

Condition(12) (At Wide-angle End [W]): $|Y'_{\max}/PZ|=0.17$
Condition(12) (At Telephoto End [T]): $|Y'_{\max}/PZ|=0.19$

TABLE 27
Construction Data of Comparison Example 4

f= 5.1 ~12.0~29.4
 $\omega=33.3 \sim 14.5 \sim 6.0(^{\circ})$
 FNO= 2.96~ 3.4~ 4.1

Radius of Curvature	Axial Distance	Refractive Index	Abbe Number
r1= 72.91			
	d1= 0.80	N1= 1.833	ν 1= 21
r2= 24.95			
	d2= 3.01	N2= 1.733	ν 2= 52.3
r3= -88.40			
	d3= 0.10		
r4= 14.50			
	d4= 1.79	N3= 1.659	ν 3= 55.5
r5= 30.07			
	d5= 0.5~6.1~10.4		
r6*= 63.22			
	d6= 0.75	N4= 1.773	ν 4= 49.8
r7*= 7.36			
	d7= 2.68		
r8= -8.19			
	d8= 0.70	N5= 1.773	ν 5= 49.8
r9= 8.49			
	d9= 0.01	N6= 1.514	ν 6= 57
r10= 8.49			
	d10= 1.35	N7= 1.833	ν 7= 21
r11=-101.05			
	d11=10.4~4.8~0.5		
r12= ∞ (S)			
	d12= 0.50		
r13= 10.71			
	d13= 1.58	N8= 1.722	ν 8= 51.4
r14= -18.10			
	d14= 0.01	N9= 1.514	ν 9= 57
r15= -18.10			
	d15= 1.00	N10=1.847	ν 10=23.8
r16*= 95.26			

$d16 = 5.1 \sim 2.6 \sim 0.2$
 $r17 = 5.58$
 $d17 = 3.13 \quad N11 = 1.7 \quad \nu 11 = 49.6$
 $r18 = -23.43$
 $d18 = 0.10$
 $r19^* = -95.40$
 $d19 = 1.00 \quad N12 = 1.847 \quad \nu 12 = 23.8$
 $r20^* = 9.41$
 $d20 = 1 \sim 3.4 \sim 5.9$
 $r21 = \infty$
 $d21 = 3.40 \quad N13 = 1.517 \quad \nu 13 = 64.1$
 $r22 = \infty$
 $d22 = 4.61$
 $r23 = \infty (I)$

Aspherical Surface Data of Sixth Surface (r6)

$A = 7.67 \times 10^{-4}, B = -1.15 \times 10^{-5}, C = 8.18 \times 10^{-8}$

Aspherical Surface Data of Seventh Surface (r7)

$A = 8.54 \times 10^{-4}, B = 1.62 \times 10^{-5}, C = 5.77 \times 10^{-7}$

Aspherical Surface Data of Sixteenth Surface (r16)

$A = 9.53 \times 10^{-5}, B = 2.01 \times 10^{-5}, C = -4.61 \times 10^{-6}, D = 3.69 \times 10^{-7}$

Aspherical Surface Data of Nineteenth Surface (r19)

$A = 1.66 \times 10^{-3}, B = -1.25 \times 10^{-4}, C = 1.37 \times 10^{-6}$

Aspherical Surface Data of Twentieth Surface (r20)

$A = 4.20 \times 10^{-3}, B = -2.46 \times 10^{-5}, C = 5.03 \times 10^{-6}$

TABLE 28

Values corresponding to Condition (13)

		$ (h/d)\tan\theta $
Example 7	Diffractive Surface in Third Unit	0.012~0.016
Example 8	Diffractive Surface in Second Unit	0.027~0.042
Example 8	Diffractive Surface in Third Unit	0.019~0.043
Example 9	Diffractive Surface in Third Unit	0.012~0.027
Example 10	Diffractive Surface in Third Unit	0.009~0.021

TABLE 29

Values corresponding to Conditions (14) and (15)

Example	Lens Unit with Diffractive Surface	Condition (14)	Condition (15)
		$ \{(h \cdot \phi_{\text{doe}} \cdot D_{\text{doe}})/(2 \cdot \lambda_0)\} \cdot \tan(\omega_{\text{max}}) $	$ (h/d_{\text{min}}) \cdot \tan(\omega_{\text{max}}) $
7	Third Unit	0.020	0.027
8	Second Unit	0.054	0.040
8	Third Unit	0.053	0.061
9	Third Unit	0.026	0.039
10	Third Unit	0.026	0.030

TABLE 30

Chromatic Aberration Coefficients in Comparison Example 4
(having no diffractive lens element)

			Whole	First unit	Second unit	Third Unit	Fourth Unit
Chromatic Aberration Coefficients	W	LC	12	1	0	-11	27
		TC	38	-2	38	-14	10
	T	LC	1	1	-1	-1	1
		TC	-22	-36	54	-19	-28

TABLE 31

Chromatic Aberration Coefficients in Example 7
(having diffractive lens element in Third Lens Unit)

			Whole	First Unit	Second Unit	Third unit		Fourth Unit
						Whole	Diffractive Lens Element	
Chromatic Aberration Coefficients	W	LC	5	1	1	-27	-30	34
		TC	35	-2	36	-10	-5	5
	T	LC	0	1	0	-2	-2	2
		TC	-23	-30	50	-12	-5	-39

TABLE 32

Data on Glass Material

Lens	Glass Material	nd	ν d
LL	Low Refractive Index/Low Dispersion	1.5	60
LH	Low Refractive Index/High Dispersion	1.6	40
HH	High Refractive Index/High Dispersion	1.8	30
HL	High Refractive Index/Low Dispersion	1.7	50
-	Diffractive Lens Surface	∞	-3.45

TABLE 33

Aberration Coefficients of Models (a) to (c)

Lens Position	Aberration Coefficients	(a)	(b)		(c)	
		Positive Lens:LL Negative Lens:HH	Positive Lens:LL Negative Lens:HH	Positive Lens:HL Negative Lens:LH	Positive Lens:LL	Positive Lens:HL
Without Regard to Position	PT	0.778	0.759	0.543	0.63	0.55
Aperture Position	AS	1	1	1	1	1
Behind Aperture Stop	AS	0.036	0.973	1.217	1.366	1.19

TABLE 34

Aberration Coefficients in Comparison Example 4 and Example 7

			Whole	First Unit	Second Unit	Third Unit	Fourth Unit
Comparison Example 4	W	AS	130	486	-349	587	-560
	T	AS	-4	1046	-1501	600	-103
	PT		-48	239	-988	322	379
Example 7	W	AS	154	499	-258	534	-586
	T	AS	18	924	-1357	540	-42
	PT		-16	261	-980	237	465

TABLE 35
Construction Data of Example 11

$f = 4.8 \sim 10.5 \sim 23.0$
 $\omega = 32.6 \sim 16.4 \sim 7.7(^{\circ})$
 $FNO = 2.4 \sim 3.25 \sim 4.1$

Radius of Curvature	Axial Distance	Refractive Index	Abbe Number
$r1^* = -108.09$			
	$d1 = 0.34$	$N1 = 1.773$	$\nu 1 = 49.6$
$r2 = 10.93$			
	$d2 = 1.50$		
$r3^* = 40.71$			
	$d3 = 0.76$	$N2 = 1.805$	$\nu 2 = 25.4$
$r4 = 120.55$			
	$d4 = 14.7 \sim 5.3 \sim 0.1$		
$r5 = 84.26$			
	$d5 = 0.34$	$N3 = 1.847$	$\nu 3 = 23.8$
$r6 = 19.66$			
	$d6 = 1.83$	$N4 = 1.734$	$\nu 4 = 51.5$
$r7 = -27.21$			
	$d7 = 0.10$		
$r8 = 11.99$			
	$d8 = 1.43$	$N5 = 1.72$	$\nu 5 = 50.2$
$r9^* = 41.07$			
	$d9 = 0.1 \sim 3.7 \sim 14.6$		
$r10 = \infty (S)$			
	$d10 = 0.3 \sim 5.3 \sim 10.2$		
$r11 = -7.70$			
	$d11 = 0.73$	$N6 = 1.805$	$\nu 6 = 25.4$
$r12 = -5.38$			
	$d12 = 0.34$	$N7 = 1.487$	$\nu 7 = 70.2$
$r13 = 18.51$			
	$d13 = 9.9 \sim 5.0 \sim 0.1$		
$r14^* \# = 16.61$			
	$d14 = 1.64$	$N8 = 1.773$	$\nu 8 = 49.6$
$r15 = -19.97$			
	$d15 = 0.10$		
$r16 = 62.60$			

$d_{16} = 0.34$ $N_9 = 1.847$ $\nu_9 = 23.8$
 $r_{17} = 7.97$
 $d_{17} = 1.95$ $N_{10} = 1.773$ $\nu_{10} = 49.6$
 $r_{18} = -64.01$
 $d_{18} = 7.27$
 $r_{19} = \infty$
 $d_{19} = 3.40$ $N_{11} = 1.517$ $\nu_{11} = 64.1$
 $r_{20} = \infty$
 $d_{20} = 1.00$
 $r_{21} = \infty (I)$

Aspherical Surface Data of First Surface (r1)

$A = 1.30 \times 10^{-4}$, $B = -1.51 \times 10^{-6}$, $C = 7.60 \times 10^{-9}$

Aspherical Surface Data of Third Surface (r3)

$A = 8.53 \times 10^{-6}$, $B = 1.31 \times 10^{-6}$, $C = -1.75 \times 10^{-9}$

Aspherical Surface Data of Ninth Surface (r9)

$A = 4.77 \times 10^{-5}$, $B = 3.06 \times 10^{-7}$, $C = -1.35 \times 10^{-8}$

Aspherical Surface Data of Fourteenth Surface (r14)

$A = -1.63 \times 10^{-4}$, $B = 3.97 \times 10^{-7}$, $C = 6.40 \times 10^{-11}$

Diffractive Surface Data of Fourteenth Surface (r14)

$C_1 = -1.63 \times 10^{-4}$, $C_2 = 9.32 \times 10^{-6}$

Values corresponding to Conditions

Condition(18): $\phi_{\text{doe}} / \phi_{\text{gr4}} = 0.0033$

Condition(19): $tW / fW = 2.3$

Condition(20): $tT / fT = 0.5$

Condition(21) (At Wide-angle End [W]): $|Y'_{\text{max}} / PZ| = 0.05$

Condition(21) (At Telephoto End [T]): $|Y'_{\text{max}} / PZ| = 0.08$

TABLE 36
Construction Data of Comparison Example 5

$f = 4.8 \sim 10.5 \sim 23.0$

$\omega = 32.6 \sim 16.4 \sim 7.7(^{\circ})$

$FNO = 2.4 \sim 3.25 \sim 4.1$

Radius of Curvature	Axial Distance	Refractive Index	Abbe Number
$r1^{*} = -48.33$			
	$d1 = 0.63$	$N1 = 1.773$	$\nu 1 = 49.6$
$r2 = 11.94$			
	$d2 = 1.90$		
$r3^{*} = 42.15$			
	$d3 = 1.28$	$N2 = 1.805$	$\nu 2 = 25.4$
$r4 = 142.47$			
	$d4 = 23.5 \sim 8.1 \sim 0.9$		
$r5 = 37.08$			
	$d5 = 0.42$	$N3 = 1.847$	$\nu 3 = 23.8$
$r6 = 15.49$			
	$d6 = 3.00$	$N4 = 1.734$	$\nu 4 = 51.5$
$r7 = -93.80$			
	$d7 = 0.35$		
$r8 = 20.15$			
	$d8 = 1.68$	$N5 = 1.72$	$\nu 5 = 50.2$
$r9^{*} = -71.59$			
	$d9 = 0.8 \sim 4.6 \sim 18.0$		
$r10 = \infty (S)$			
	$d10 = 0.3 \sim 5.6 \sim 12.0$		
$r11 = -11.17$			
	$d11 = 1.19$	$N6 = 1.805$	$\nu 6 = 25.4$
$r12 = -7.44$			
	$d12 = 0.42$	$N7 = 1.487$	$\nu 7 = 70.2$
$r13 = 22.81$			
	$d13 = 11.9 \sim 6.9 \sim 0.1$		
$r14^{*} = 21.27$			
	$d14 = 1.73$	$N8 = 1.773$	$\nu 8 = 49.6$
$r15 = -19.74$			
	$d15 = 0.10$		
$r16 = -625.34$			

$d16 = 0.42$ $N9 = 1.847$ $\nu 9 = 23.8$
 $r17 = 8.07$
 $d17 = 6.00$ $N10 = 1.773$ $\nu 10 = 49.6$
 $r18 = -35.23$
 $d18 = 5.21$
 $r19 = \infty$
 $d19 = 3.40$ $N11 = 1.517$ $\nu 11 = 64.1$
 $r20 = \infty$
 $d20 = 1.77$
 $r21 = \infty (I)$

Aspherical Surface Data of First Surface (r1)
 $A = 4.46 \times 10^{-5}$, $B = -6.68 \times 10^{-7}$, $C = 3.09 \times 10^{-9}$

Aspherical Surface Data of Third Surface (r3)
 $A = 2.19 \times 10^{-5}$, $B = 1.00 \times 10^{-6}$, $C = -7.81 \times 10^{-10}$

Aspherical Surface Data of Ninth Surface (r9)
 $A = 2.77 \times 10^{-5}$, $B = 2.05 \times 10^{-8}$, $C = -1.74 \times 10^{-9}$

Aspherical Surface Data of Fourteenth Surface (r14)
 $A = -1.32 \times 10^{-4}$, $B = 2.26 \times 10^{-7}$, $C = -1.35 \times 10^{-11}$

TABLE 37

Chromatic Aberration Coefficients in Comparison Example 5
(having no diffractive lens element)

			Whole	First unit	Second Unit	Third Unit	Fourth Unit
Chromatic Aberration Coefficients	W	LC	4	-10	49	18	-53
		TC	37	101	-3	18	-79
	T	LC	1	-10	12	1	-2
		TC	2	202	194	38	-44

TABLE 38

Chromatic Aberration Coefficients in Example 11
(having diffractive lens element in Fourth Lens Unit)

			Whole	First Unit	Second Unit	Third Unit	Fourth Unit	
							Whole	Diffractive Lens Element
Chromatic Aberration Coefficients	W	LC	-9	-10	34	11	-45	-43
		TC	8	85	-3	14	-88	-95
	T	LC	0	-10	11	1	-2	-2
		TC	-11	187	-183	31	-45	-54

TABLE 39

Data on Glass Material

Glass Material	nd	ν d
Low Refractive Index/Low Dispersion	1.5	60
High Refractive Index/High Dispersion	1.8	30
Diffractive Lens Surface	∞	-3.45

TABLE 40

Aberration Coefficients of Models (a) to (c)

Lens Position	Aberration Coefficients	(a)	(b)	(c)	
				Low Refractive Index /Low Dispersion	High Refractive Index /High Dispersion
Without Regard to Position	PT	0.778	0.759	0.63	0.498
Aperture Position	AS	1	1	1	1
Behind Aperture Stop	AS	0.036	0.973	1.366	1.138

TABLE 41

Aberration Coefficients in Comparison Example 5 and Example 11

			Whole	First Unit	Second Unit	Third Unit	Fourth Unit
Comparison Example 5	W	AS	-71	541	642	-531	-724
	T	AS	13	687	-148	-80	-445
	PT		161	-381	412	-384	514
Example 11	W	AS	-29	482	714	-744	-481
	T	AS	58	434	6	-288	-95
	PT		129	-366	439	-537	594

What is claimed is:

1. An optical system comprising:

a cemented lens element, formed by cementing at least two constituent lens elements made of different optical materials together, and having a diffractive optical surface formed at a cementing interface between the two constituent lens elements, the two constituent lens elements having at their respective interfaces with air a radius of curvature different from a radius of curvature that they have at the cementing interface.

2. An optical system as claimed in claim 1,

wherein one of the two constituent lens elements of the cemented lens element has a refractive optical power of an opposite sign to a diffractive optical power of the cementing interface.

3. An optical system as claimed in claim 1,

wherein the two constituent lens elements of the cemented lens element have different refractive optical powers.

4. An optical system as claimed in claim 1,

wherein the cemented lens element fulfills the following condition:

$$0.1 \leq (\phi_p / v_d) / (\phi_{DOE} / v_{DOE}) \leq 35$$

where

ϕ_p represents a refractive optical power of that one of the two constituent lens elements of the cemented lens element which has a refractive optical power of an opposite sign to a diffractive optical power of the cementing interface;

5 v_d represents an Abbe number of that one of the two constituent lens elements of the cemented lens element which has a refractive optical power of an opposite sign to the diffractive optical power of the cementing interface;

ϕ_{DOE} represents the diffractive optical power of the cementing interface; and

v_{DOE} represents an Abbe-number-equivalent value of the cementing interface.

- 10 5. An optical system as claimed in claim 1,
wherein the cemented lens element fulfills the following condition:

$$0.04 \leq t_p / t_g \leq 5$$

where

15 t_p represents an axial distance of that one of the two constituent lens elements of the cemented lens element which has a refractive optical power of an opposite sign to a diffractive optical power of the cementing interface; and

t_g represents an axial distance of that one of the two constituent lens elements of the cemented lens element which has a refractive optical power of a same sign as the diffractive optical power of the cementing interface.

20

6. An optical system as claimed in claim 1,
wherein the optical system is a zoom lens system.

7. An optical system as claimed in claim 1,

wherein the optical system is a zoom lens system having a plurality of lens units,
at least two of the lens units each including a cemented lens element as recited in
5 claim 1.

8. An optical system for use in a taking optical system for projecting an
image on a solid-state image sensor, comprising:

a cemented lens element, formed by cementing at least two constituent lens
10 elements made of different optical materials together, and having a diffractive optical
surface formed at a cementing interface between the two constituent lens elements,
the two constituent lens elements having at their respective interfaces with air a radius
of curvature different from a radius of curvature that they have at the cementing
interface; and

15 an optical low-pass filter disposed between the optical system and an image-
sensing surface of the solid-state image sensor.

9. An optical system as claimed in claim 8,

wherein one of the two constituent lens elements of the cemented lens element
20 has a refractive optical power of an opposite sign to a diffractive optical power of the
cementing interface.

10. An optical system as claimed in claim 8,
wherein the two constituent lens elements of the cemented lens element have
different refractive optical powers.

5 11. An optical system as claimed in claim 8,
wherein the cemented lens element fulfills the following condition:

$$0.1 \leq (\phi_p / \nu_d) / (\phi_{DOE} / \nu_{DOE}) \leq 35$$

where

ϕ_p represents a refractive optical power of that one of the two constituent lens
10 elements of the cemented lens element which has a refractive optical power of an
opposite sign to a diffractive optical power of the cementing interface;

ν_d represents an Abbe number of that one of the two constituent lens elements
of the cemented lens element which has a refractive optical power of an opposite sign
to the diffractive optical power of the cementing interface;

15 ϕ_{DOE} represents the diffractive optical power of the cementing interface; and
 ν_{DOE} represents an Abbe-number-equivalent value of the cementing interface.

12. An optical system as claimed in claim 8,
wherein the cemented lens element fulfills the following condition:

20 $0.04 \leq t_p / t_g \leq 5$

where

t_p represents an axial distance of that one of the two constituent lens elements

of the cemented lens element which has a refractive optical power of an opposite sign to a diffractive optical power of the cementing interface; and

tg represents an axial distance of that one of the two constituent lens elements of the cemented lens element which has a refractive optical power of a same sign as
5 the diffractive optical power of the cementing interface.

13. An optical system as claimed in claim 8,
wherein the optical system is a zoom lens system.

10 14. An optical system as claimed in claim 8,
wherein the optical system is a zoom lens system having a plurality of lens units, at least two of the lens units each including a cemented lens element as recited in claim 8.

15 15. A method for correcting aberration, comprising steps of:
disposing a cemented lens element in the optical system; and
optimizing correction of all aberrations occurring over the entire optical system,
wherein the cemented lens element is formed by cementing at least two
constituent lens elements made of different optical materials together, with a
20 diffractive optical surface formed at a cementing interface between the two constituent lens elements, the two constituent lens elements having at their respective interfaces with air a radius of curvature different from a radius of curvature that they have at the

cementing interface.

ABSTRACT OF THE DISCLOSURE

A lens optical system is provided with a cemented lens element formed by cementing two constituent lens elements made of different optical materials together, with a diffractive optical surface formed at the cementing interface between the two
5 constituent lens elements. The two constituent lens elements have at their respective interfaces with air a radius of curvature different from the radius of curvature that they have at the cementing interface.

FIG. 1A

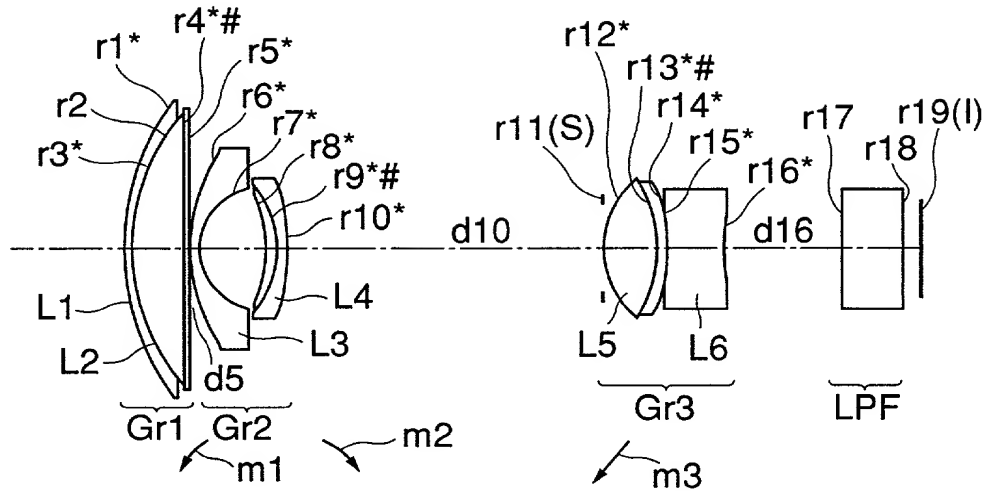


FIG. 1B

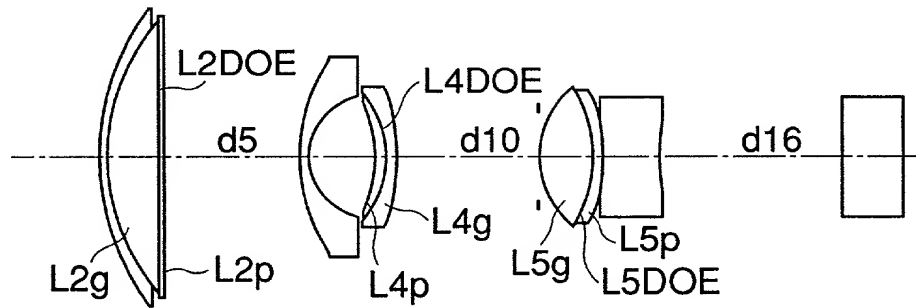


FIG. 1C

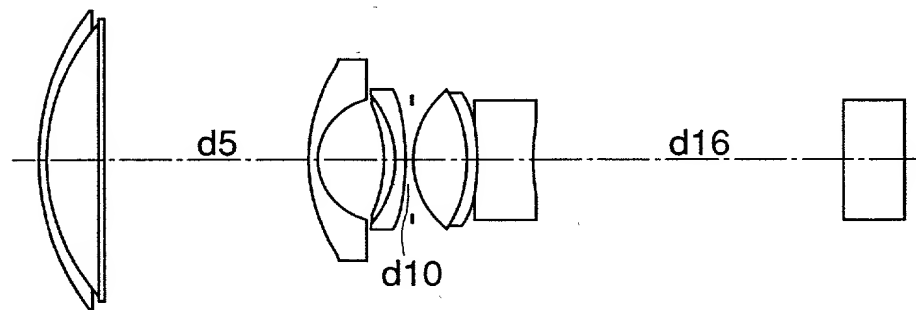


FIG. 2A

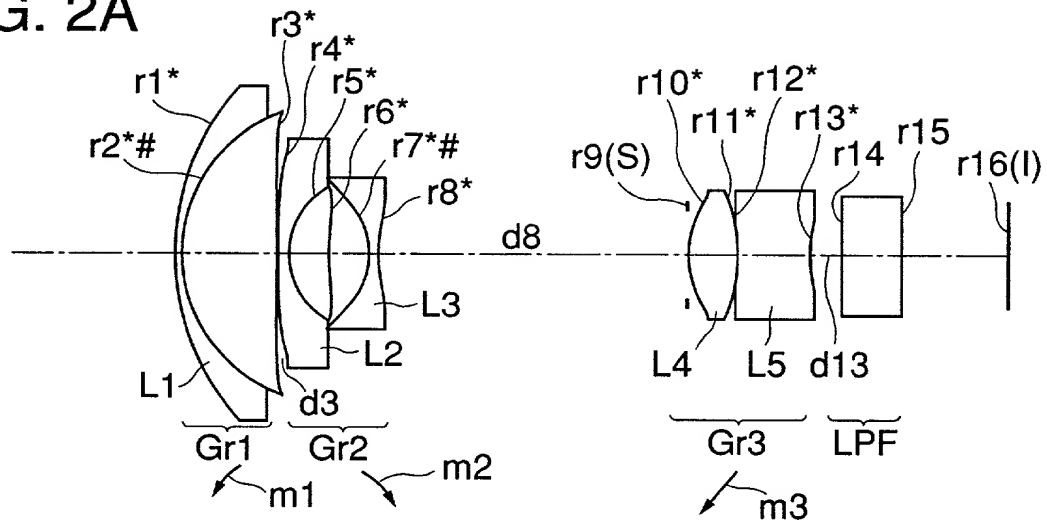


FIG. 2B

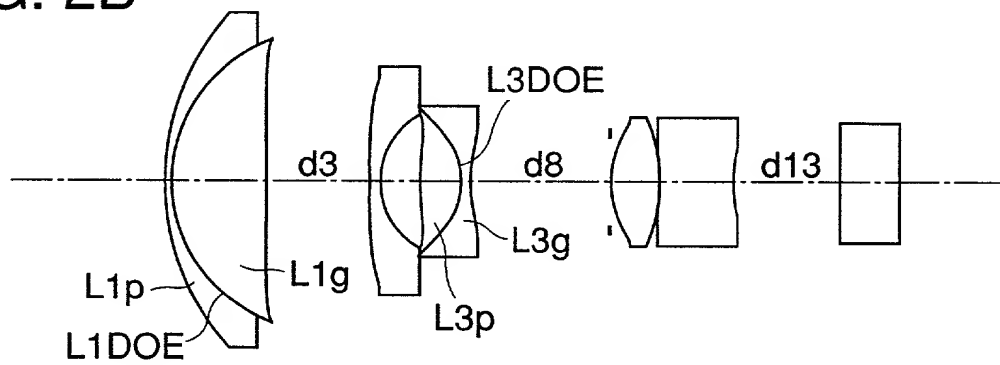


FIG. 2C

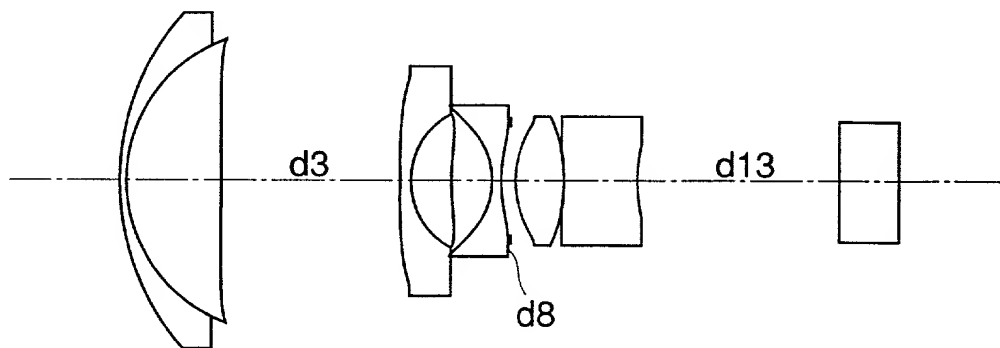


FIG. 3A

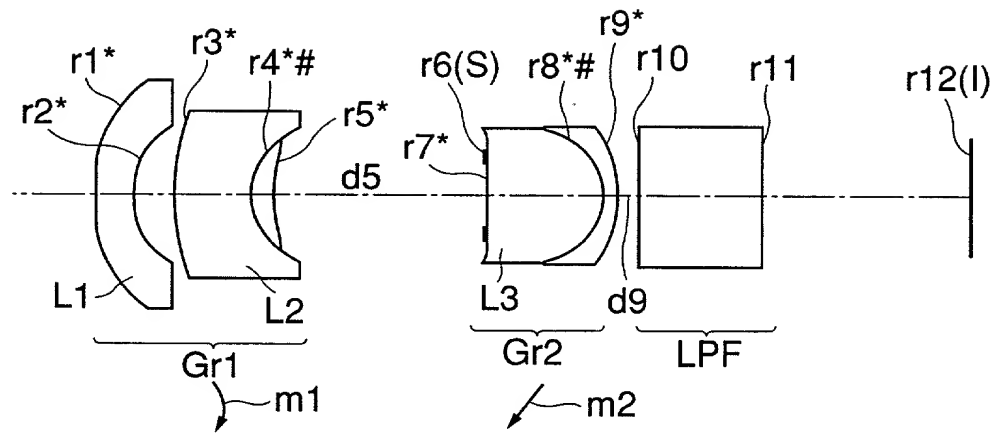


FIG. 3B

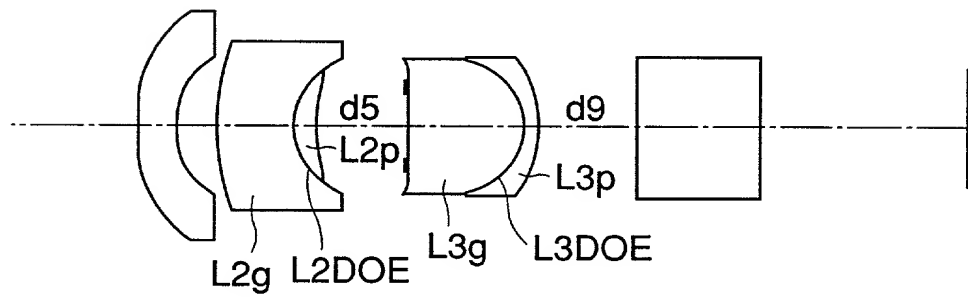


FIG. 3C

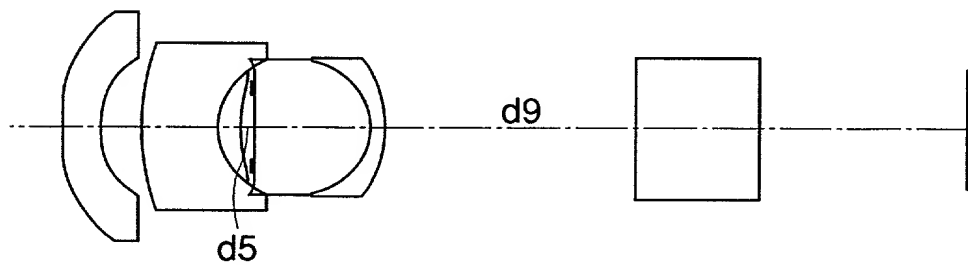


FIG. 4

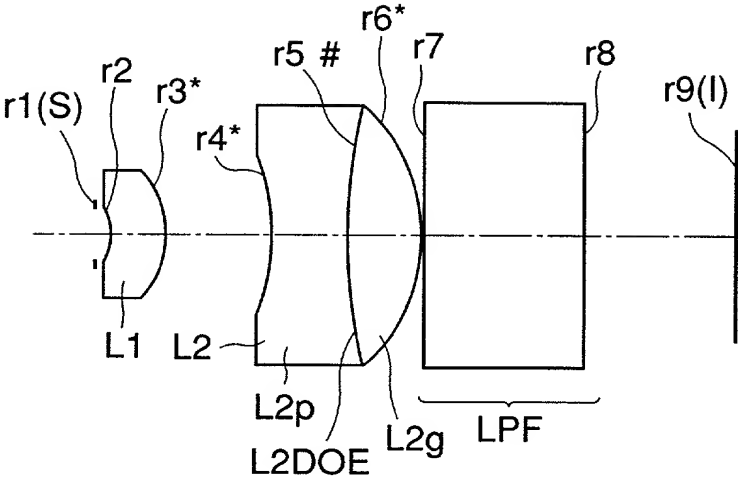


FIG. 5A

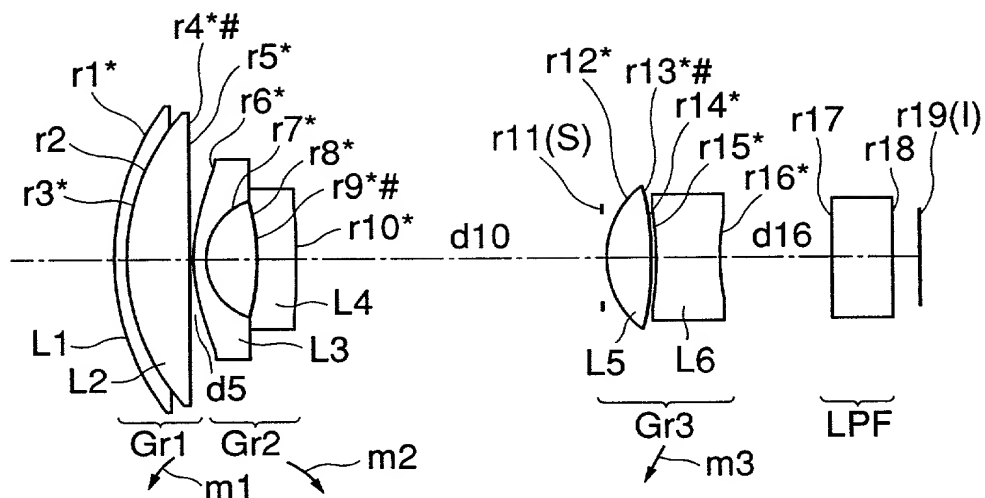


FIG. 5B

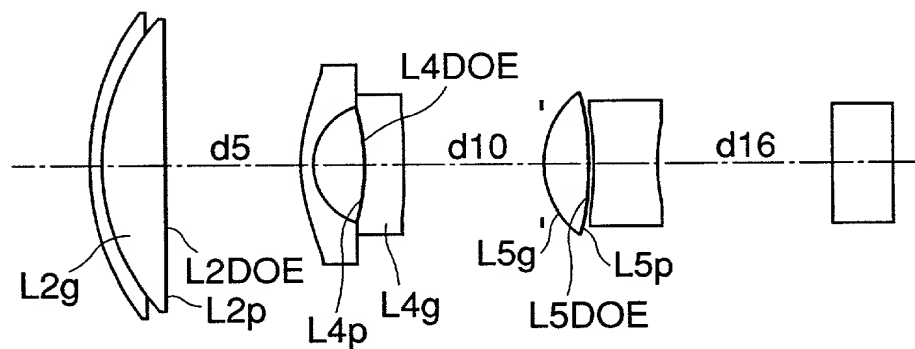


FIG. 5C

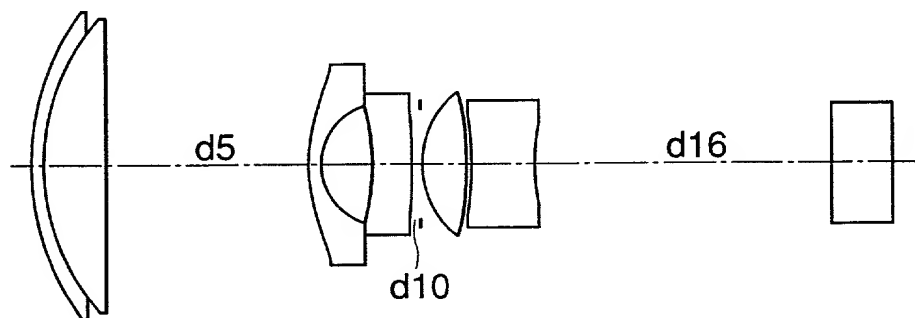


FIG. 6A

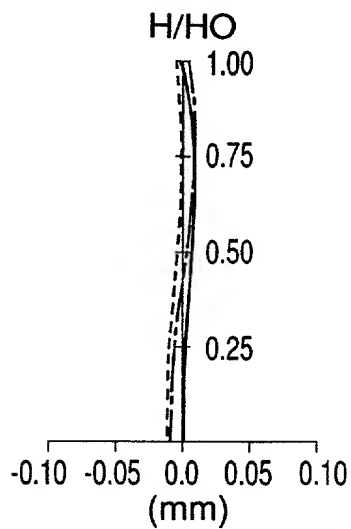


FIG. 6B

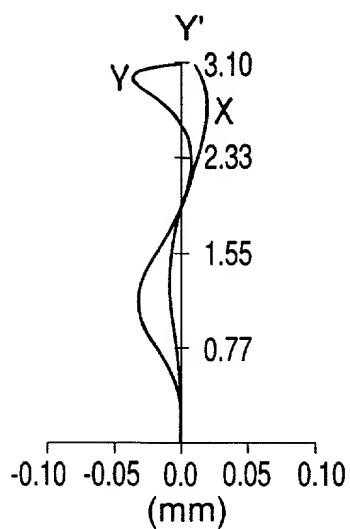


FIG. 6C

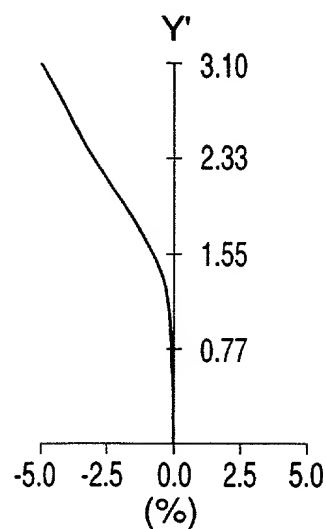


FIG. 6D

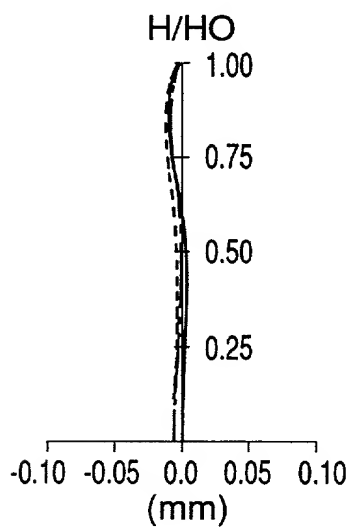


FIG. 6E

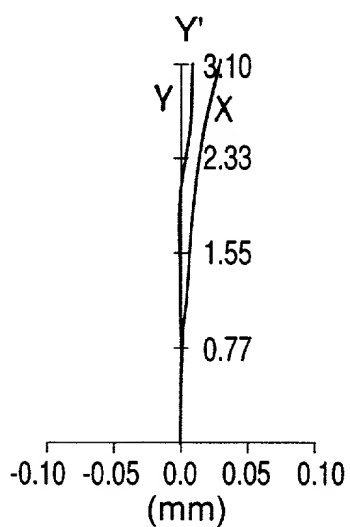


FIG. 6F

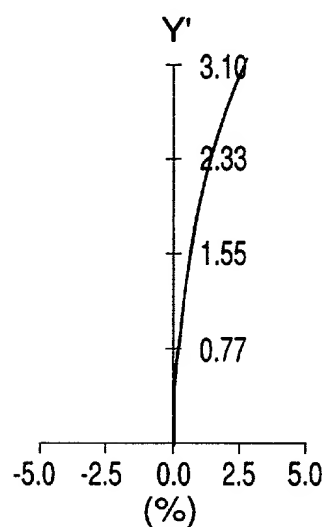


FIG. 6G

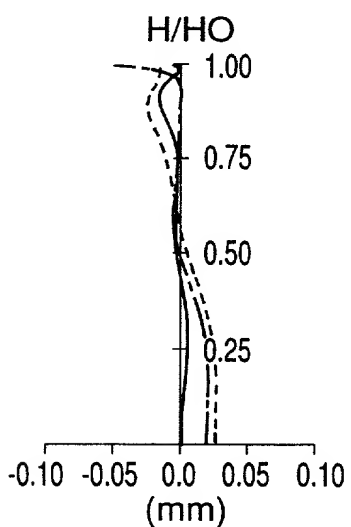


FIG. 6H

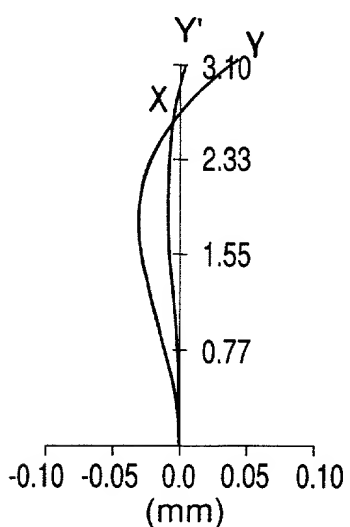


FIG. 6I

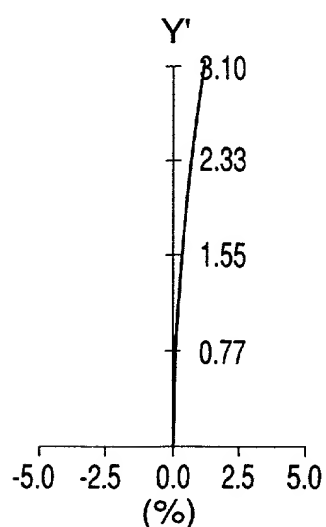


FIG. 7A

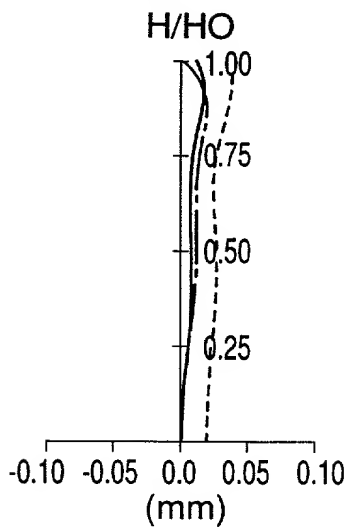


FIG. 7B

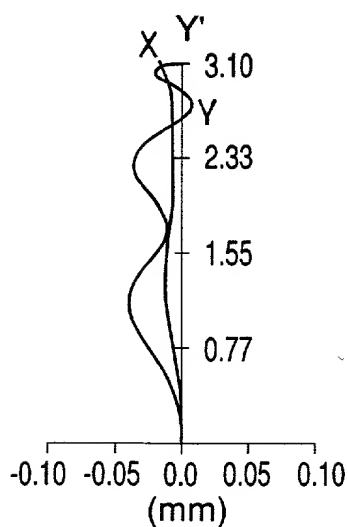


FIG. 7C

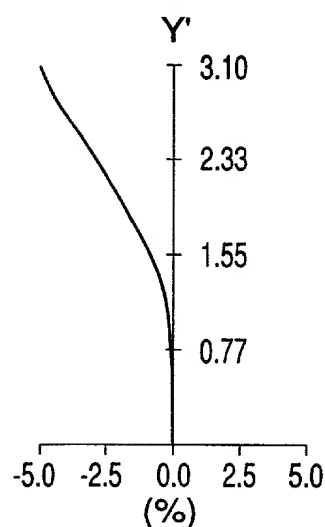


FIG. 7D

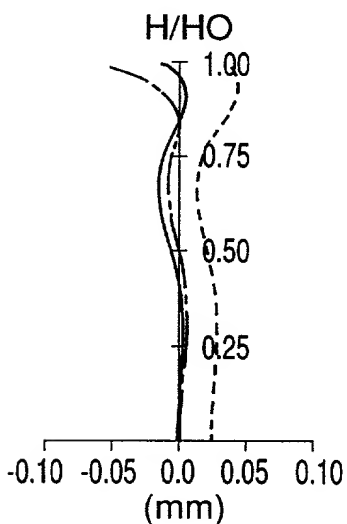


FIG. 7E

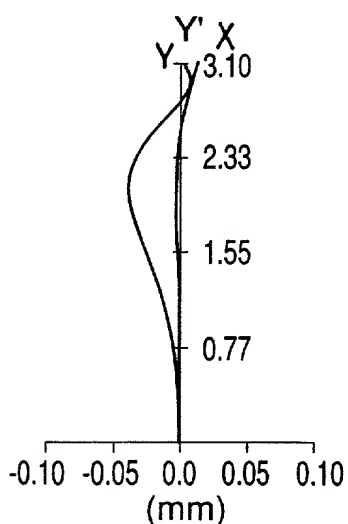


FIG. 7F

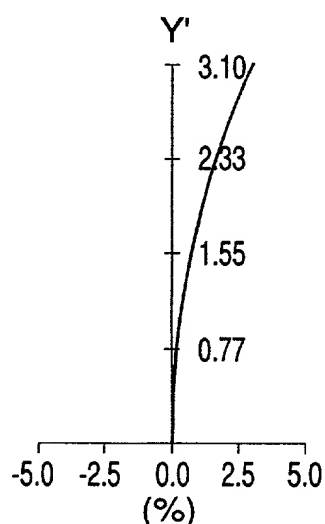


FIG. 7G

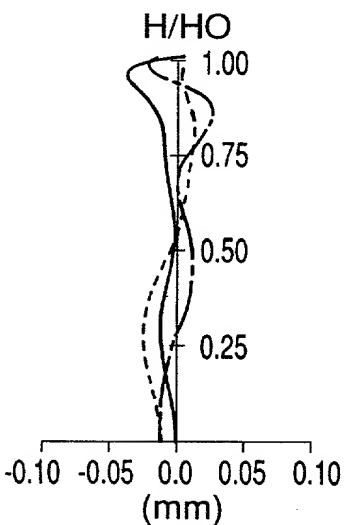


FIG. 7H

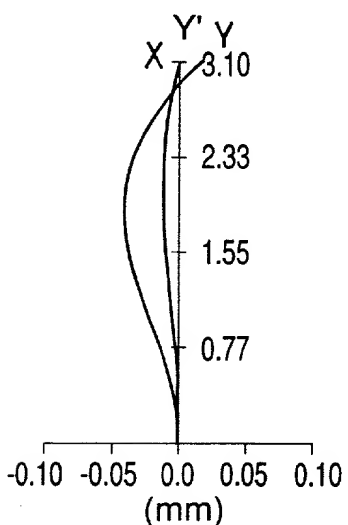


FIG. 7I

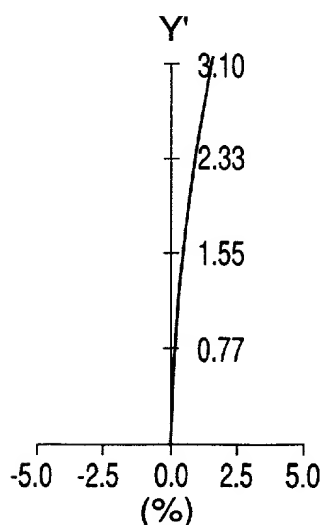


FIG. 8A

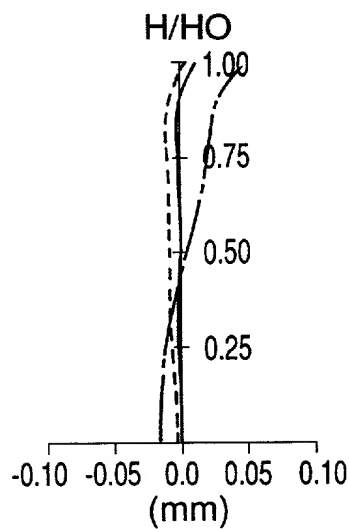


FIG. 8B

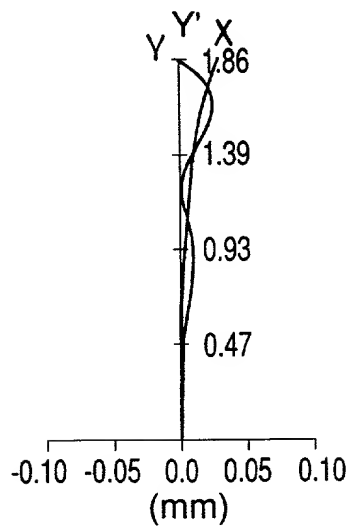


FIG. 8C

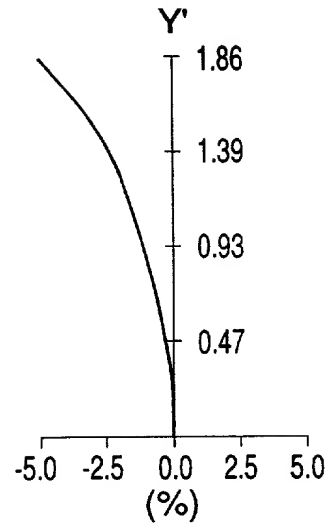


FIG. 8D

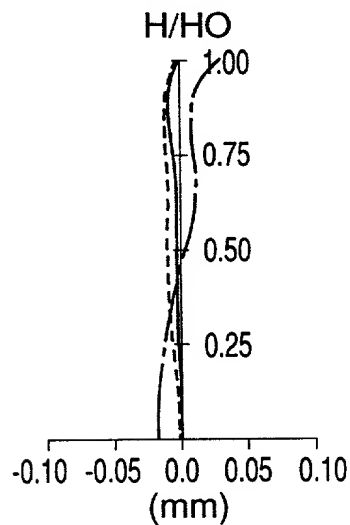


FIG. 8E

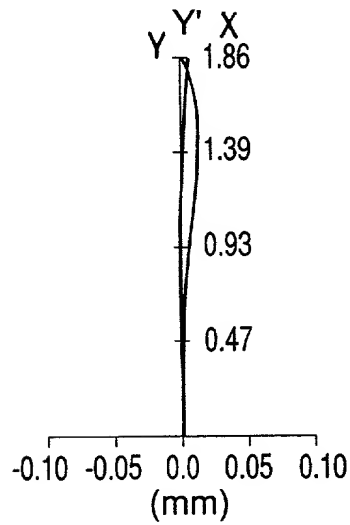


FIG. 8F

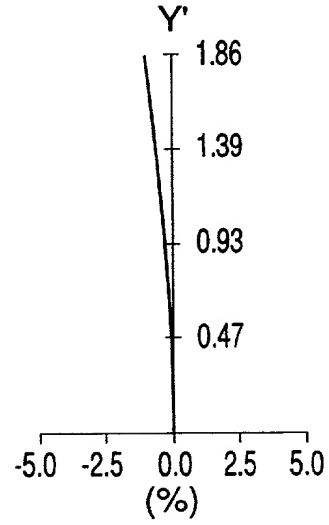


FIG. 8G

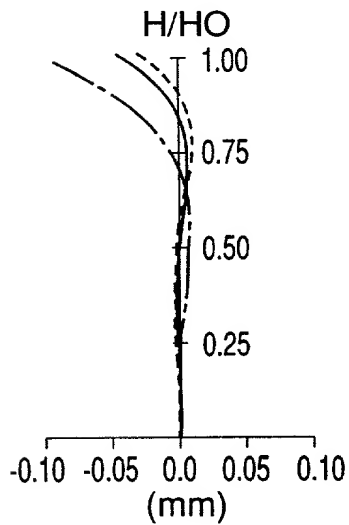


FIG. 8H

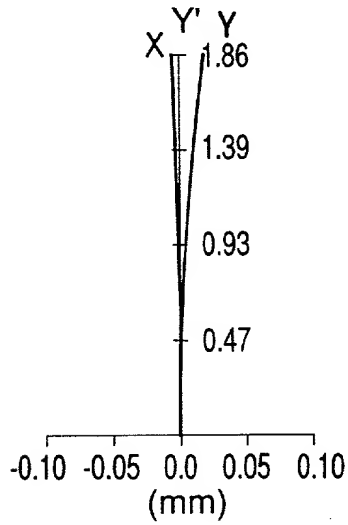


FIG. 8I

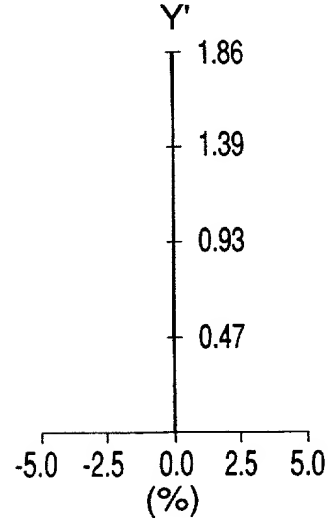


FIG. 9A

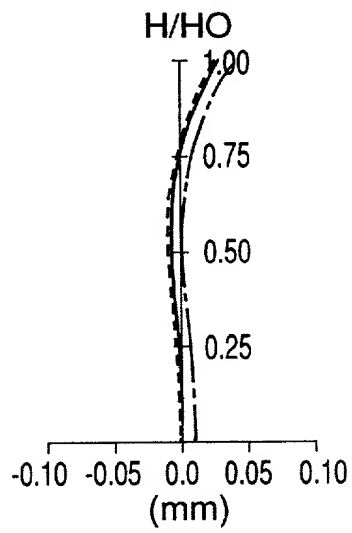


FIG. 9B

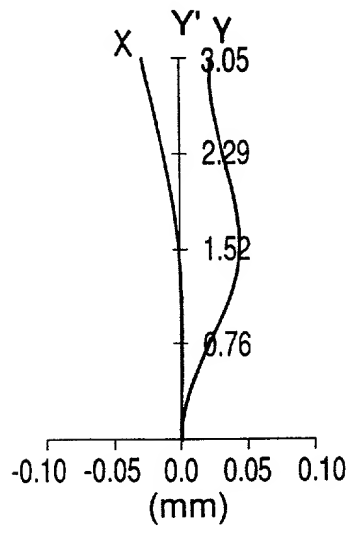


FIG. 9C

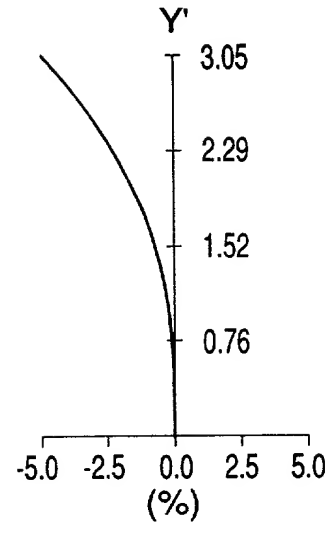


FIG. 10A

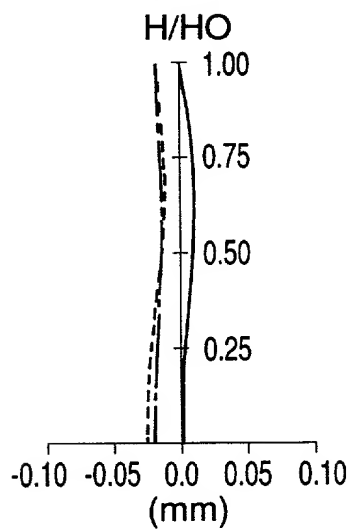


FIG. 10B

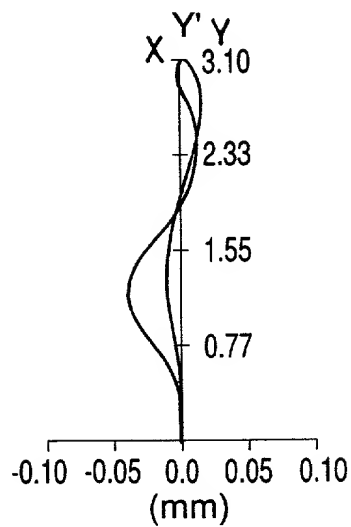


FIG. 10C

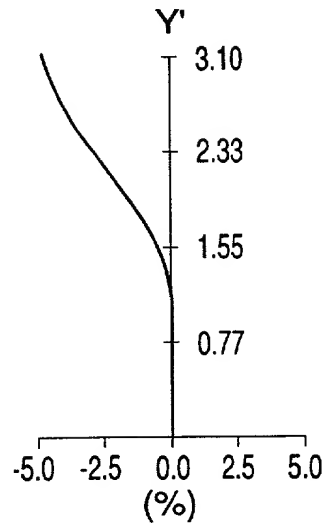


FIG. 10D

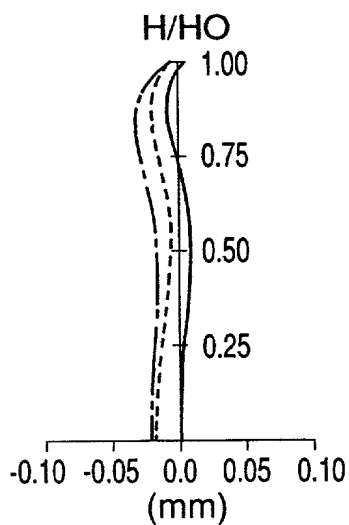


FIG. 10E

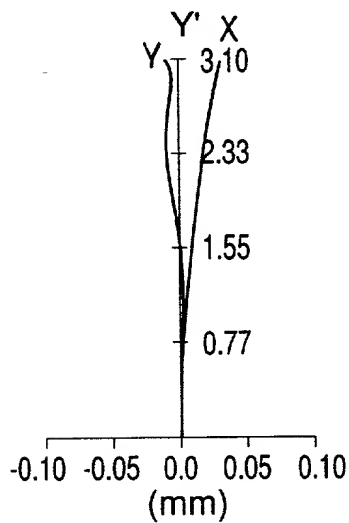


FIG. 10F

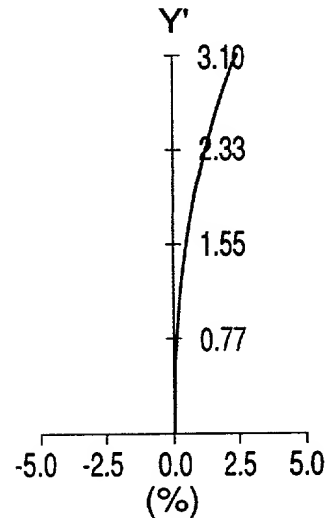


FIG. 10G

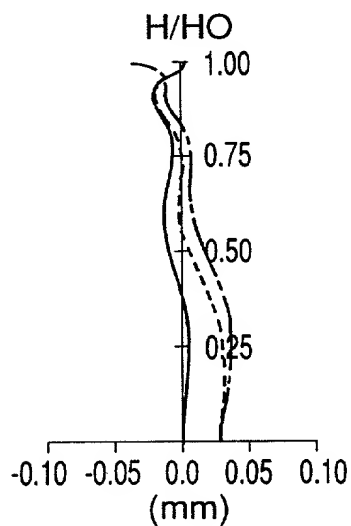


FIG. 10H

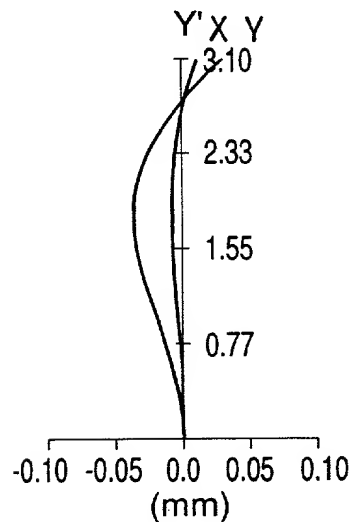


FIG. 10I

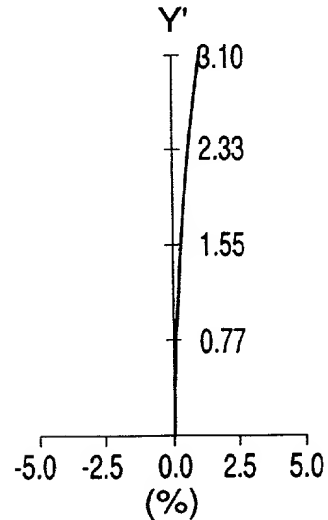


FIG. 11

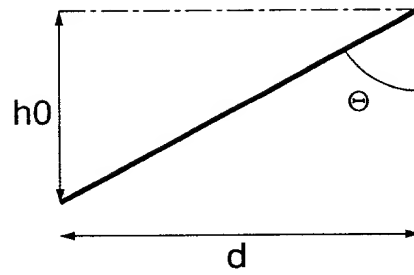


FIG. 12A

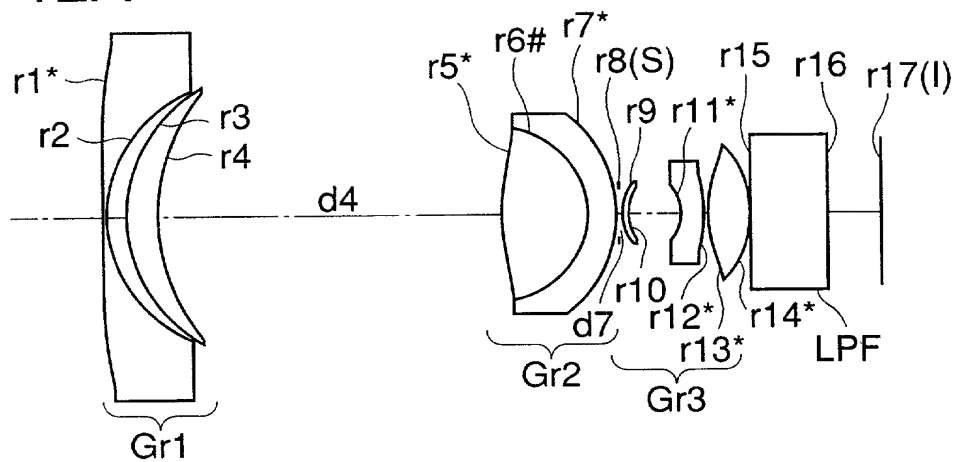


FIG. 12B

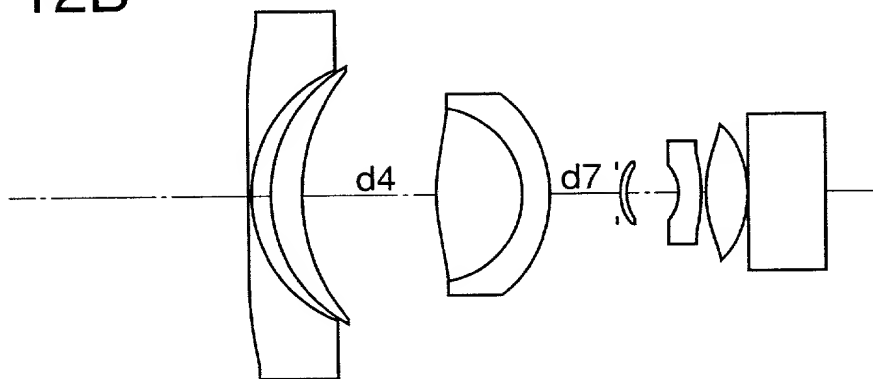


FIG. 12C

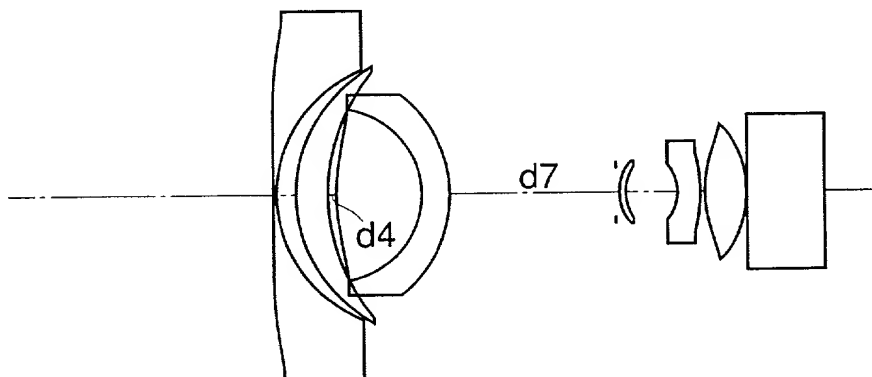


FIG. 13A

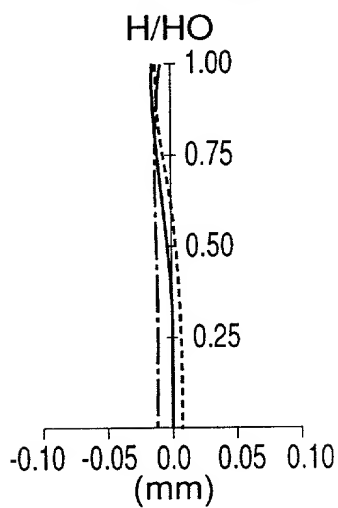


FIG. 13B

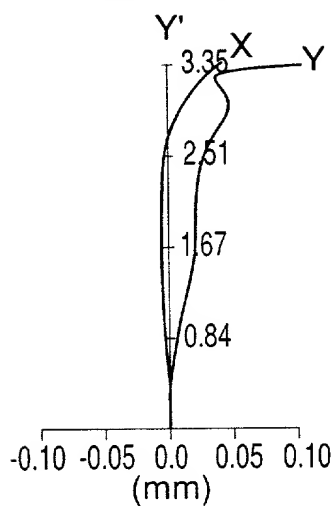


FIG. 13C

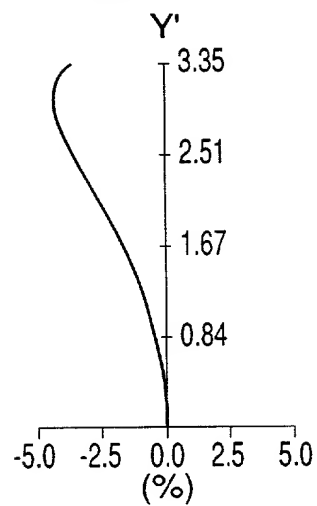


FIG. 13D

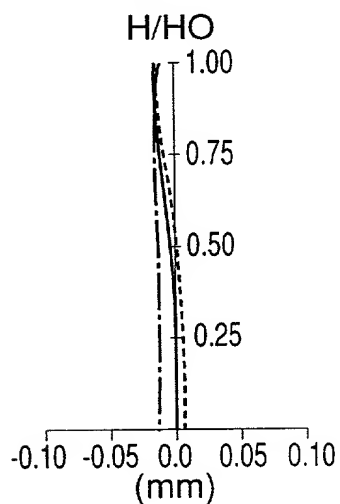


FIG. 13E

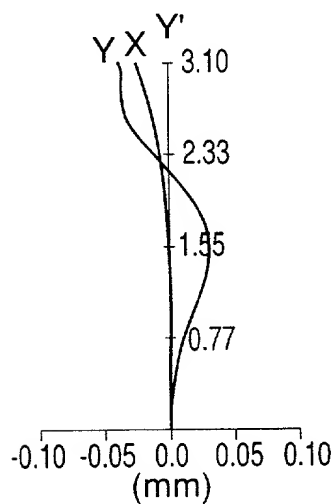


FIG. 13F

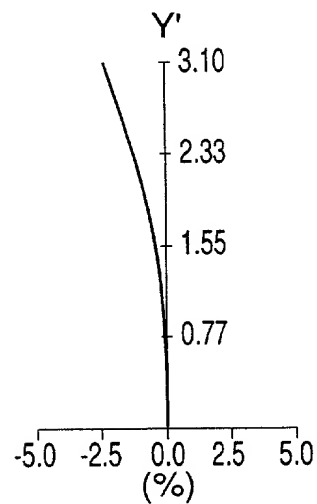


FIG. 13G

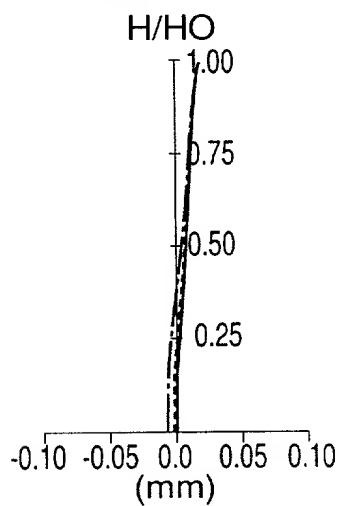


FIG. 13H

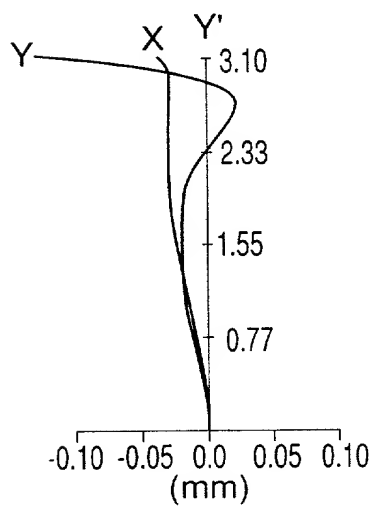


FIG. 13I

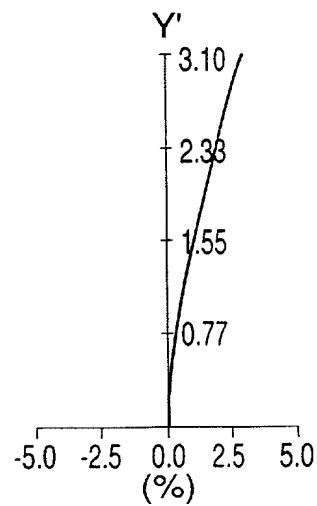


FIG. 14A

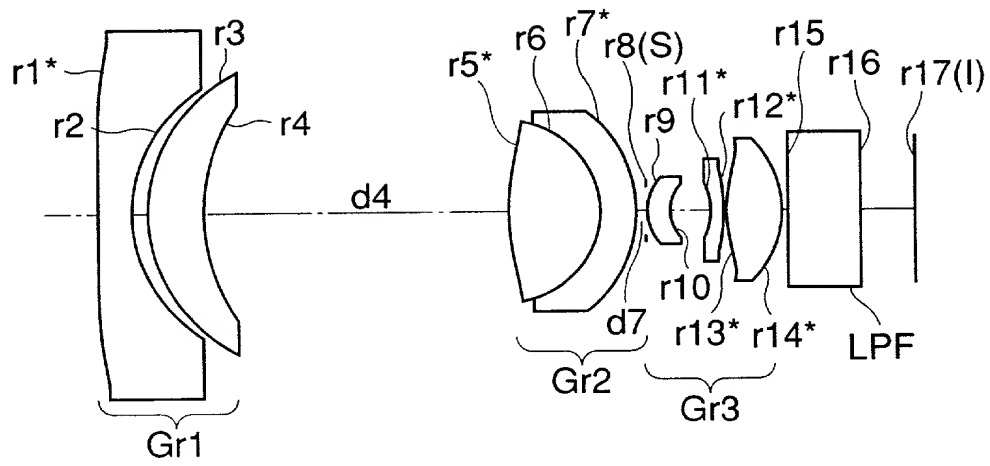


FIG. 14B

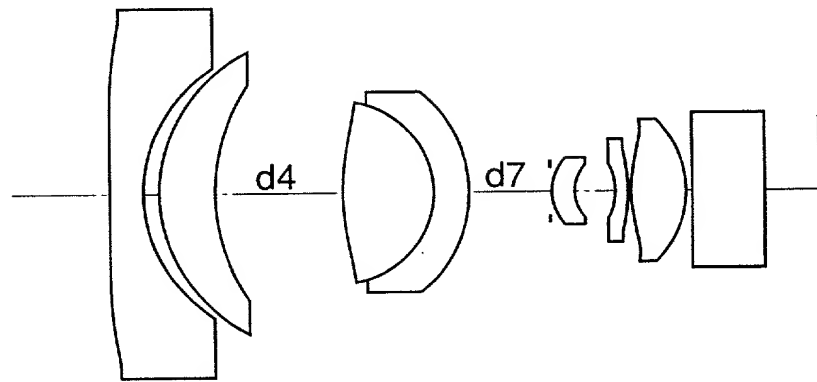


FIG. 14C

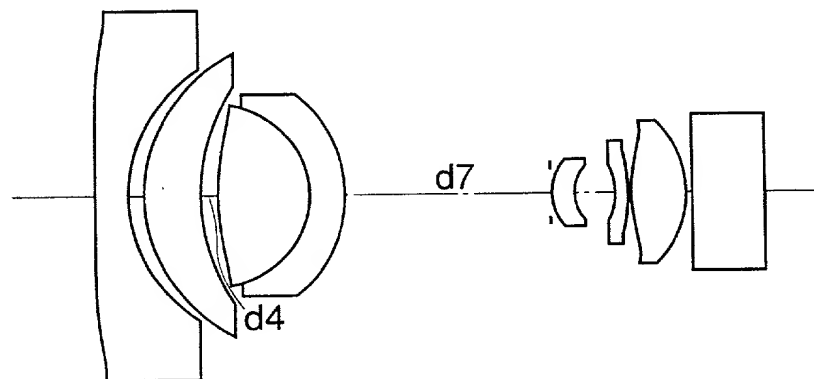


FIG. 15A

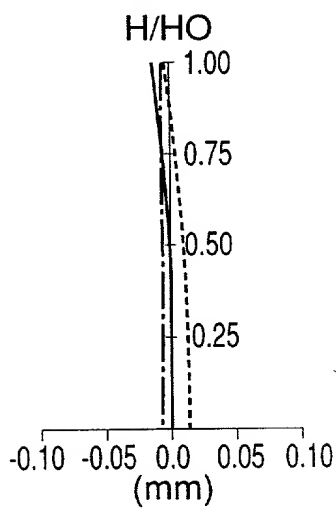


FIG. 15B

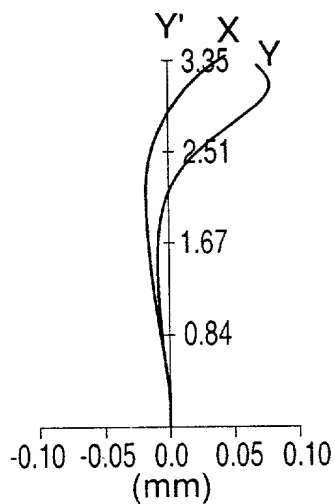


FIG. 15C

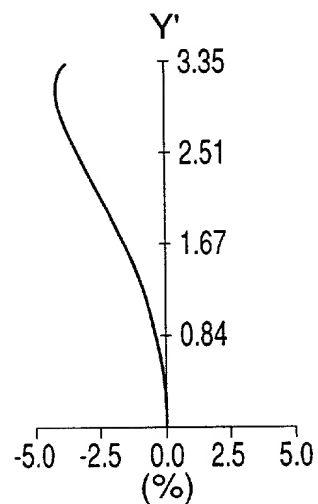


FIG. 15D

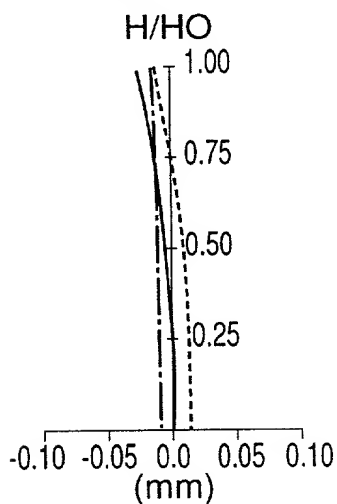


FIG. 15E

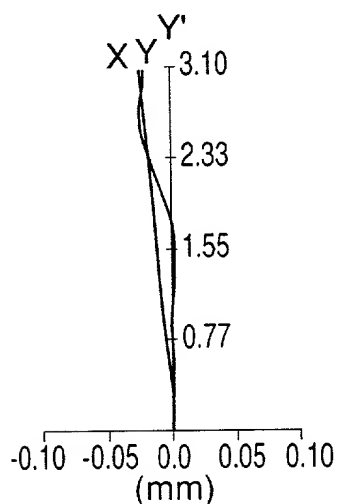


FIG. 15F

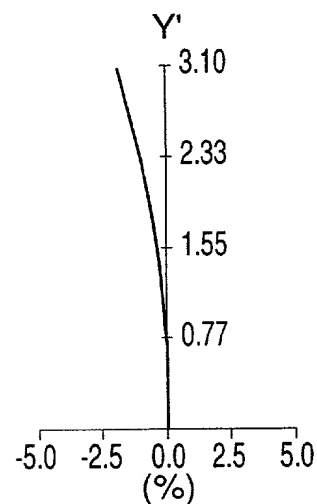


FIG. 15G

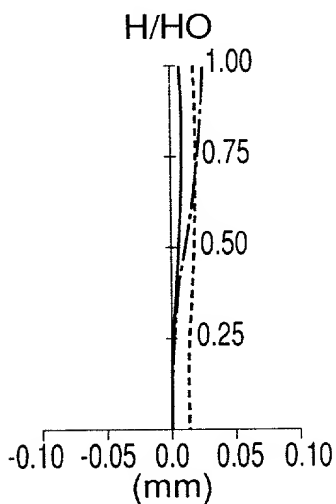


FIG. 15H

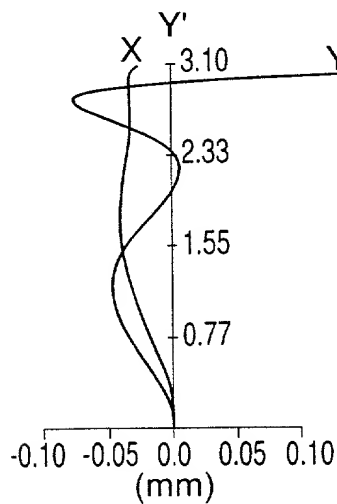


FIG. 15I

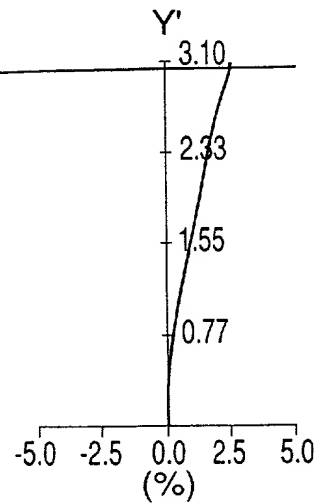


FIG. 16A

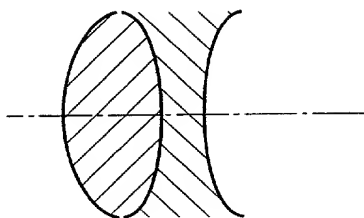


FIG. 16B

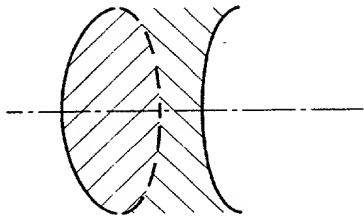


FIG. 16C




FIG. 17A

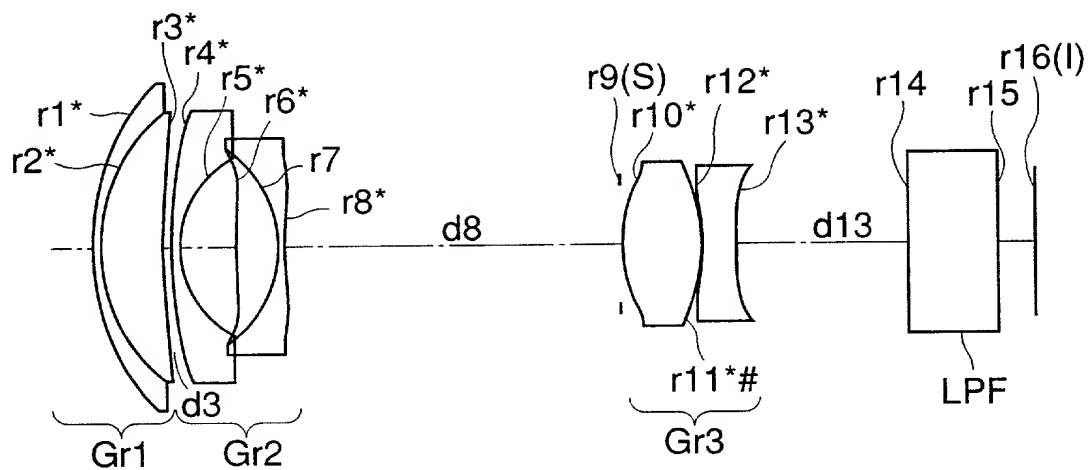


FIG. 17B

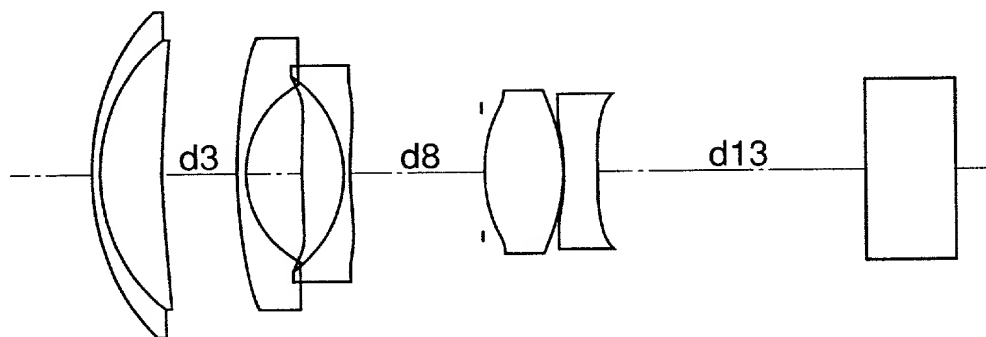


FIG. 17C

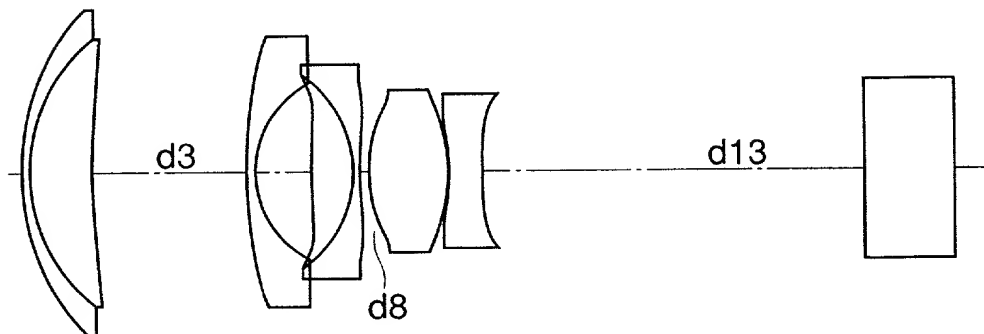


FIG. 18A

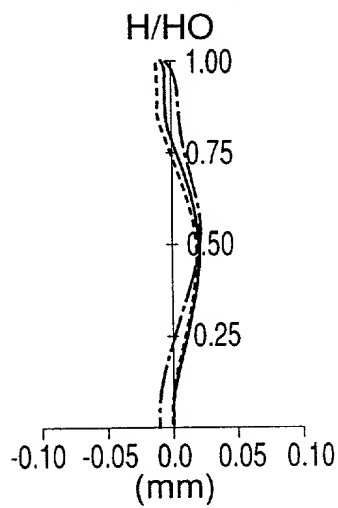


FIG. 18B

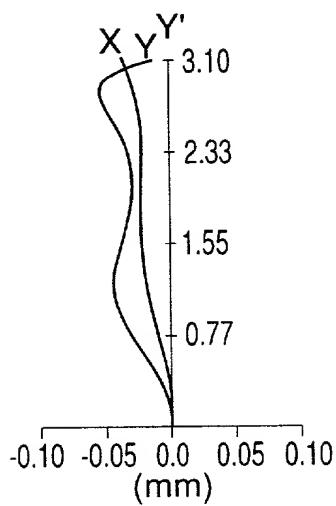


FIG. 18C

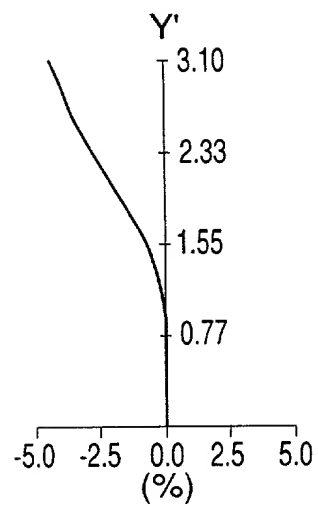


FIG. 18D

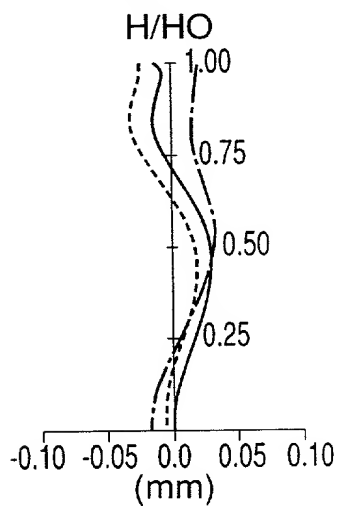


FIG. 18E

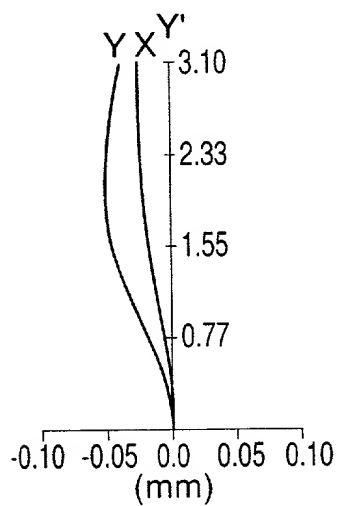


FIG. 18F

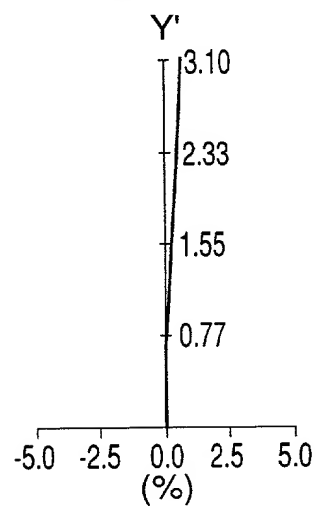


FIG. 18G

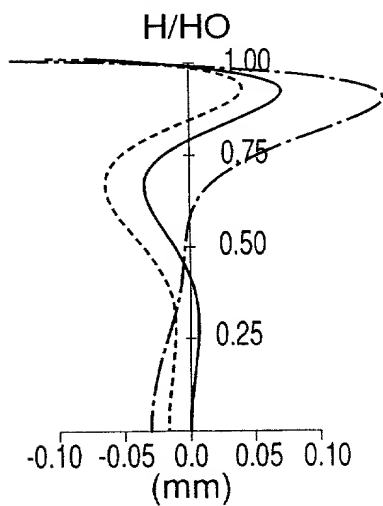


FIG. 18H

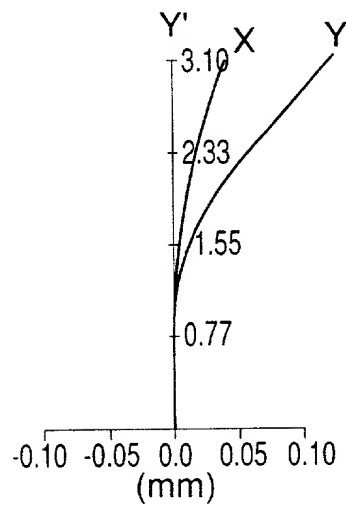


FIG. 18I

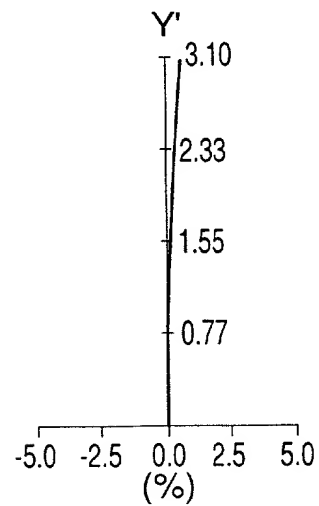


FIG. 19A

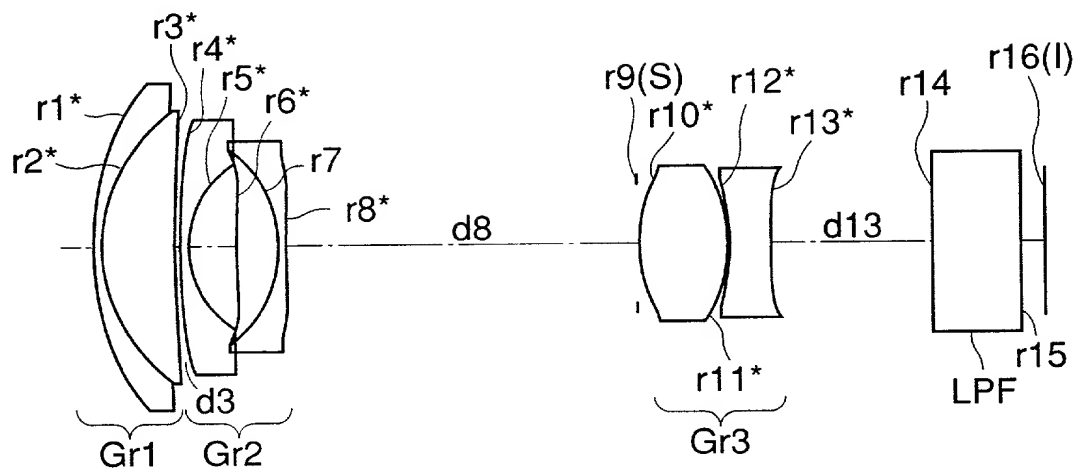


FIG. 19B

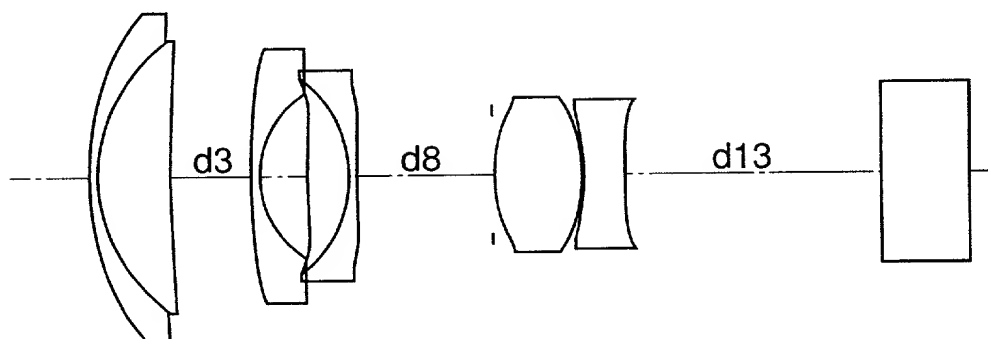


FIG. 19C

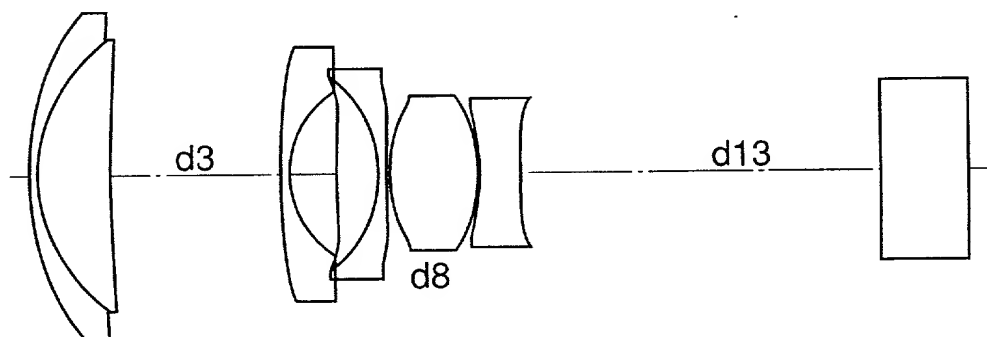


FIG. 20A

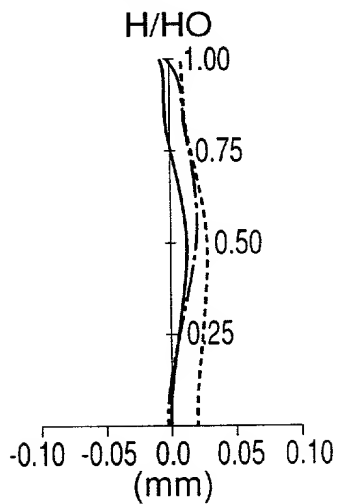


FIG. 20B

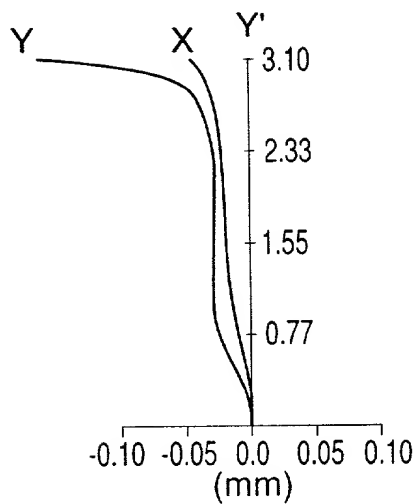


FIG. 20C

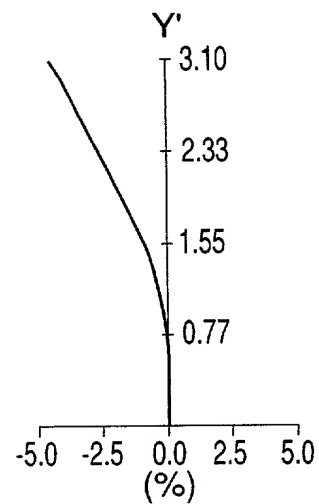


FIG. 20D

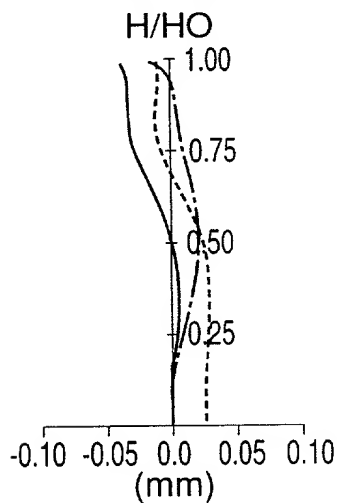


FIG. 20E

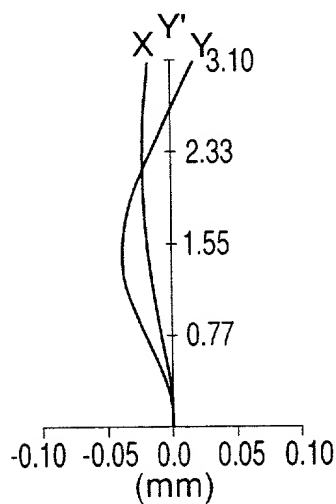


FIG. 20F

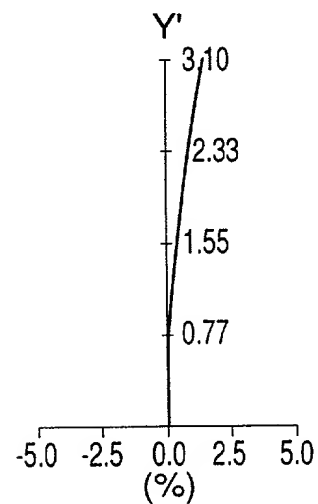


FIG. 20G

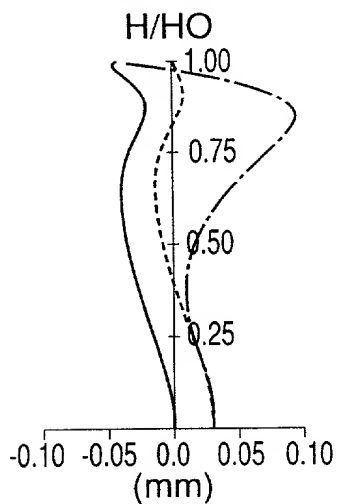


FIG. 20H

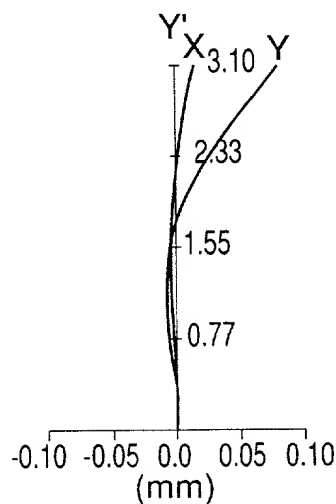


FIG. 20I

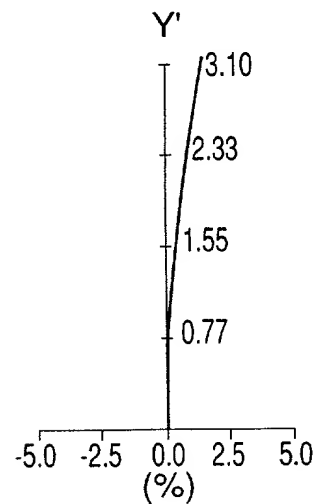


FIG. 21A

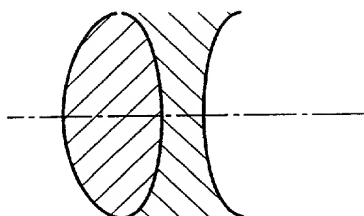


FIG. 21B

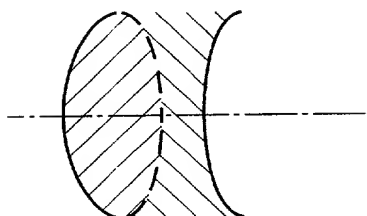


FIG. 21C




FIG. 22A

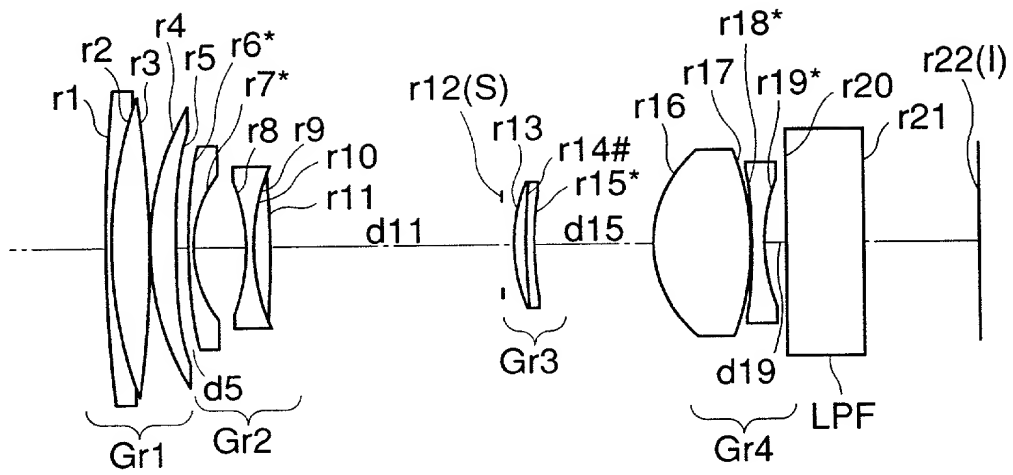


FIG. 22B

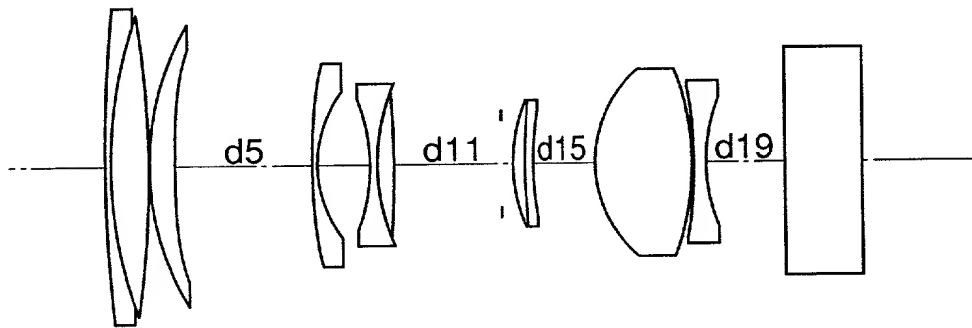


FIG. 22C

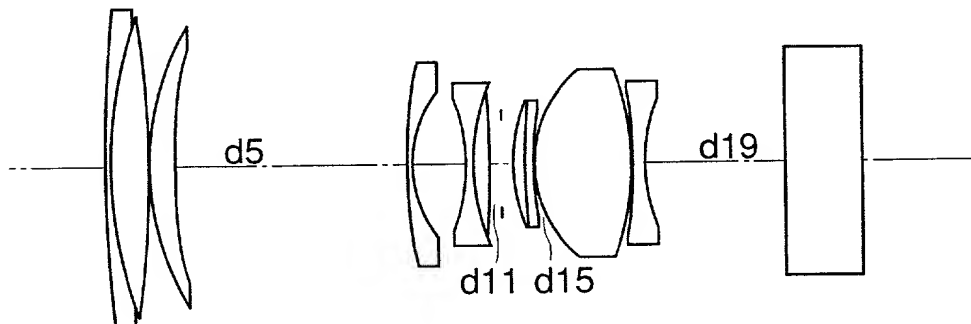


FIG. 23A

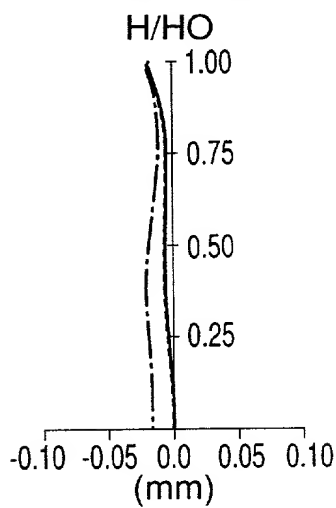


FIG. 23B

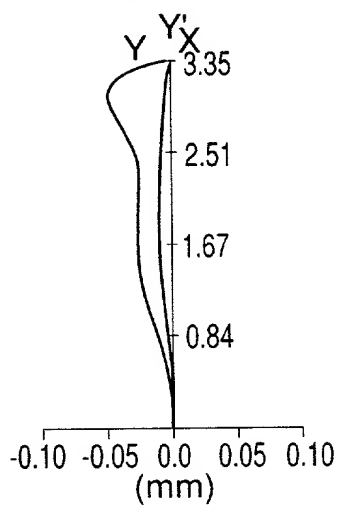


FIG. 23C

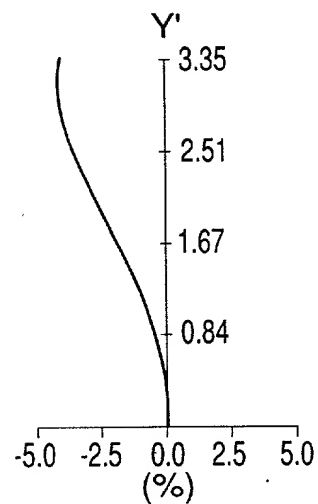


FIG. 23D

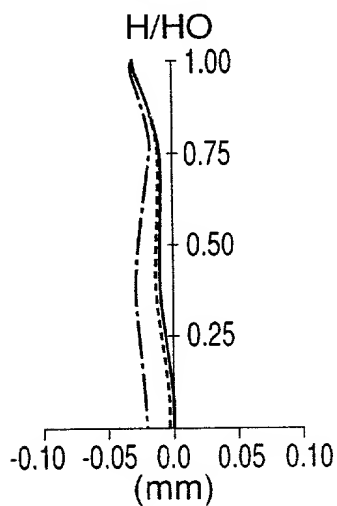


FIG. 23E

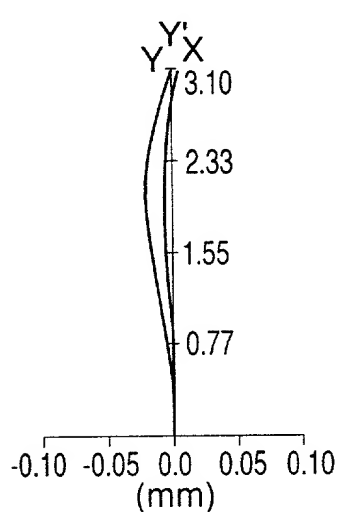


FIG. 23F

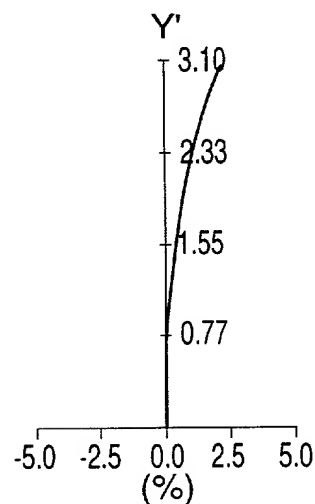


FIG. 23G

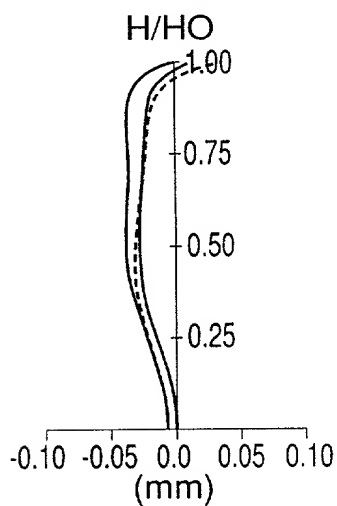


FIG. 23H

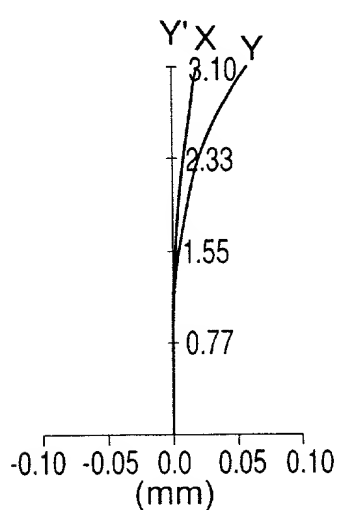


FIG. 23I

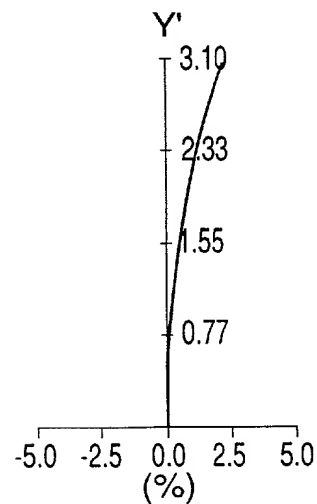


FIG. 24A

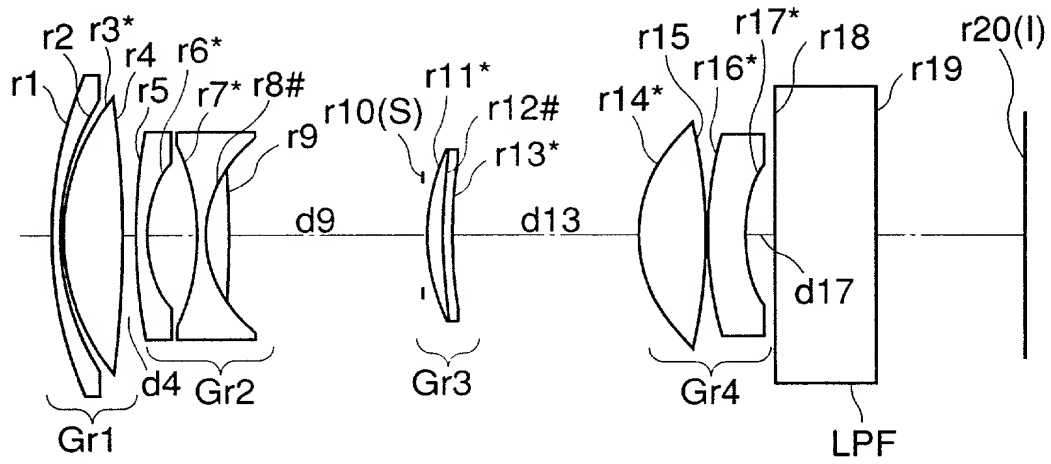


FIG. 24B

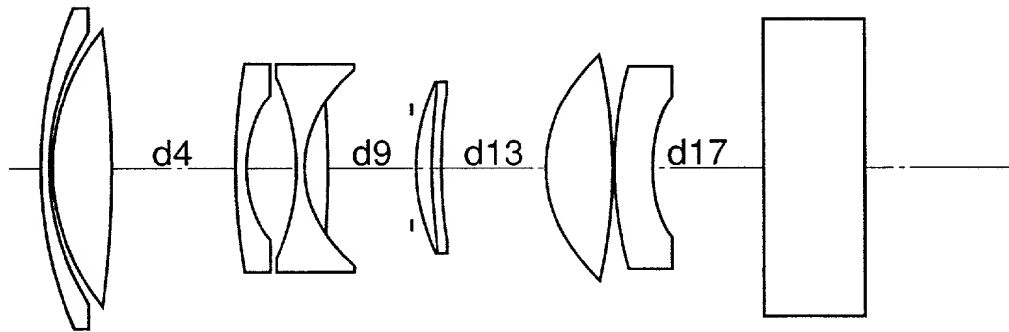


FIG. 24C

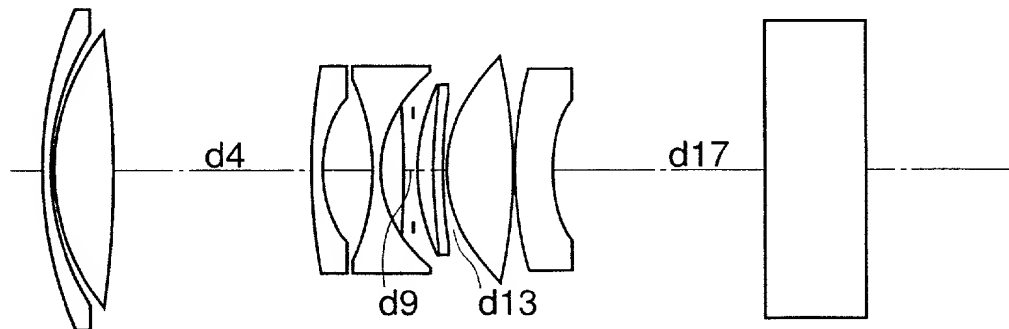


FIG. 25A

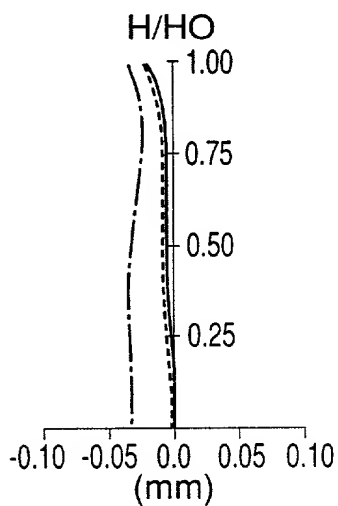


FIG. 25B

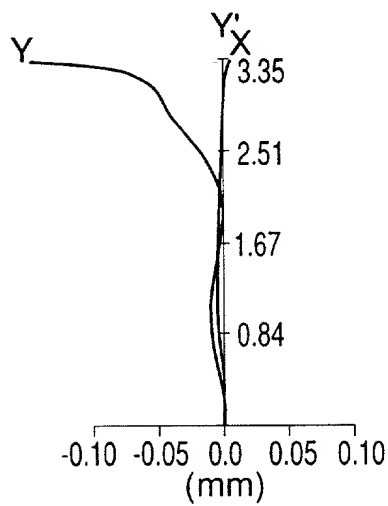


FIG. 25C

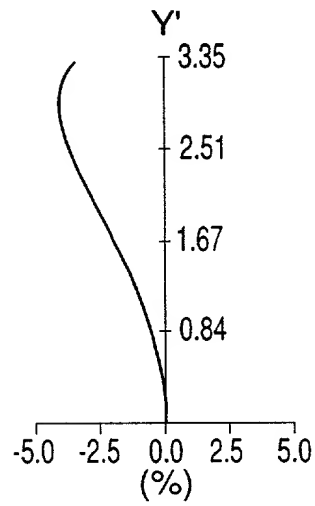


FIG. 25D

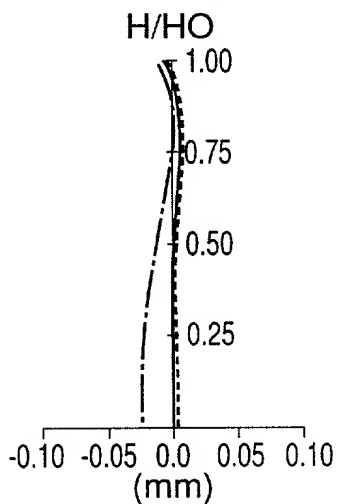


FIG. 25E

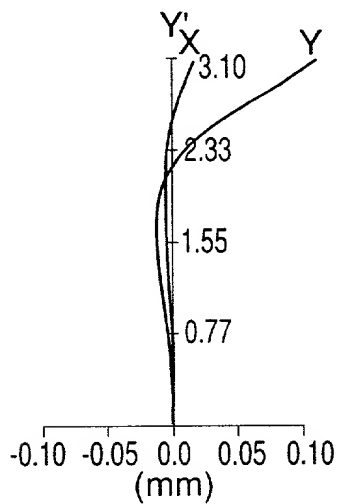


FIG. 25F

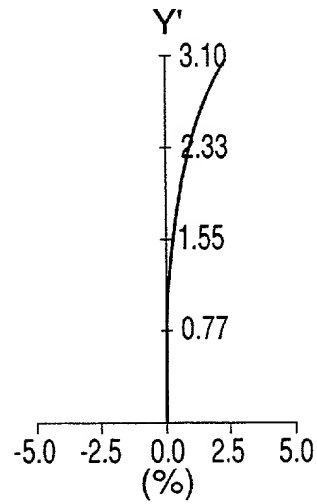


FIG. 25G

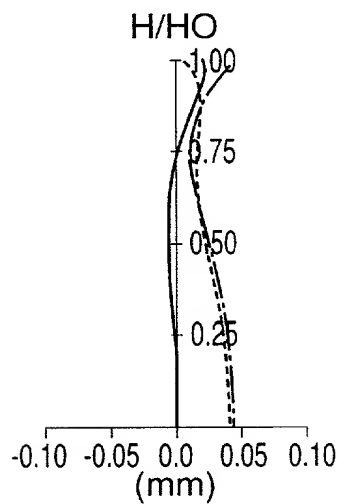


FIG. 25H

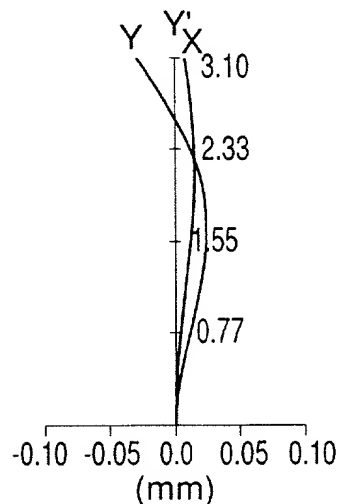


FIG. 25I

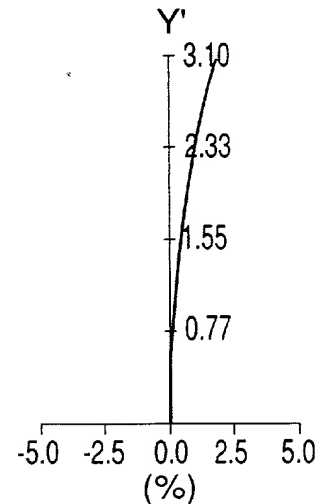


FIG. 26A

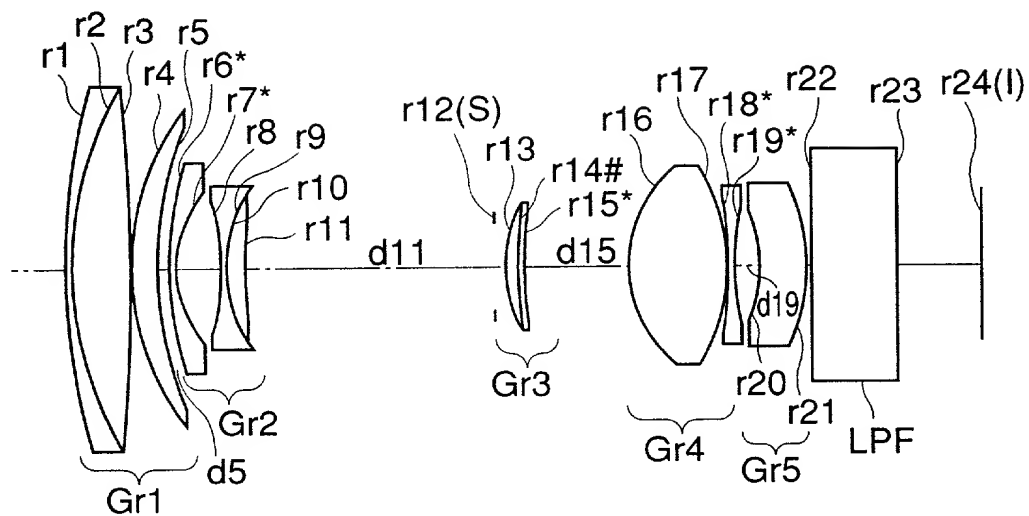


FIG. 26B

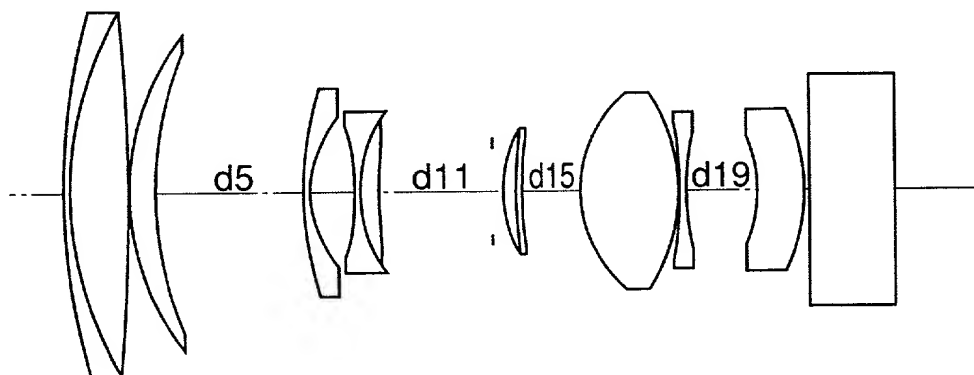


FIG. 26C

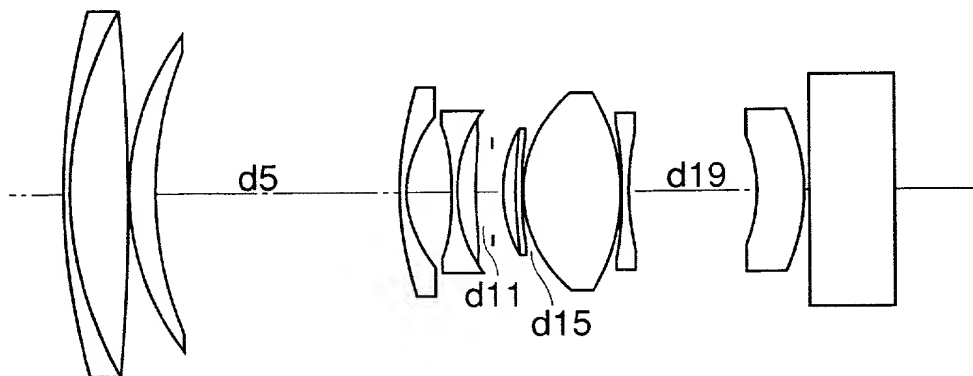


FIG. 27A

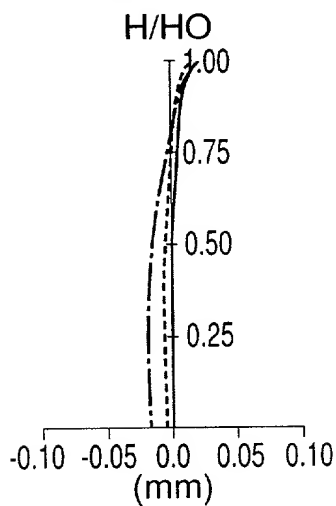


FIG. 27B

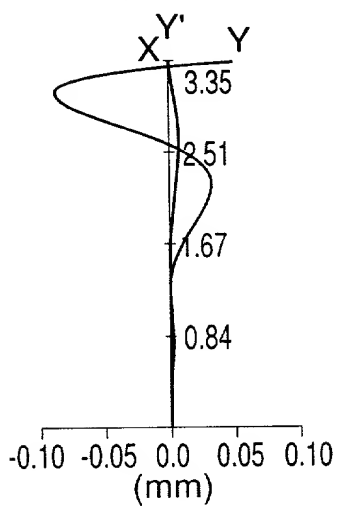


FIG. 27C

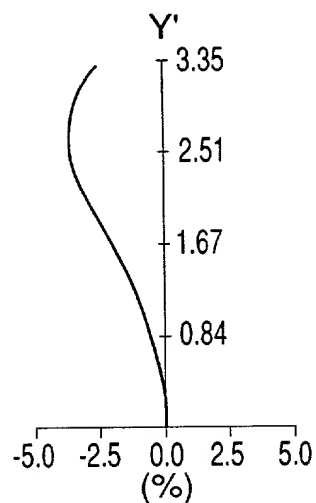


FIG. 27D

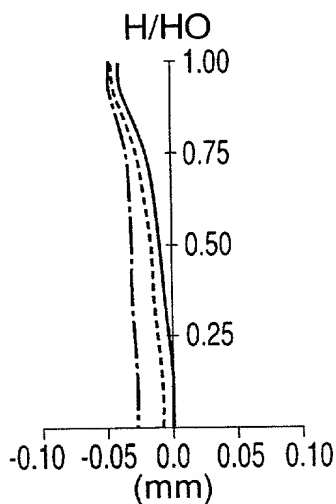


FIG. 27E

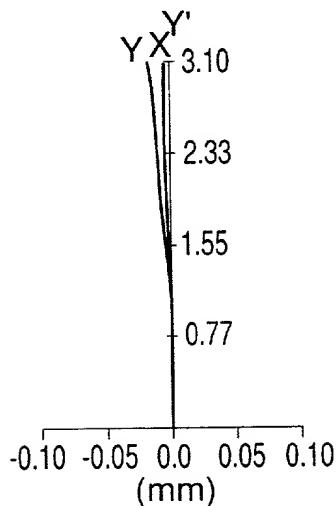


FIG. 27F

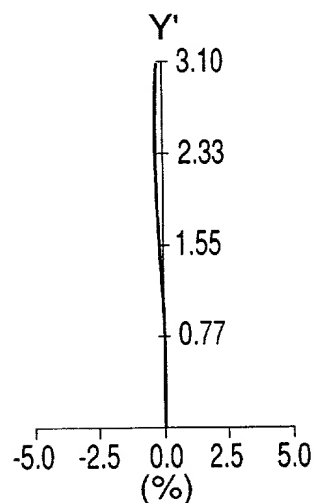


FIG. 27G

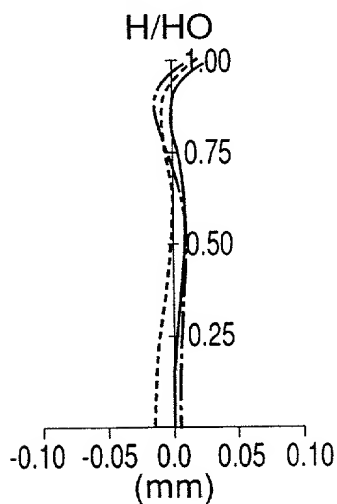


FIG. 27H


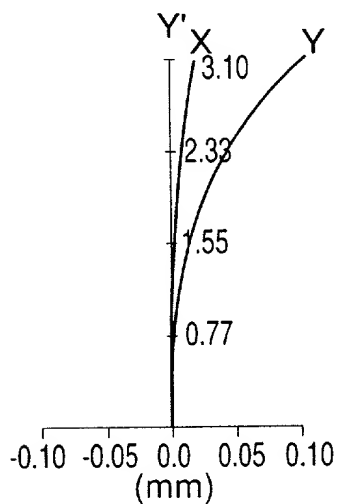


FIG. 27I

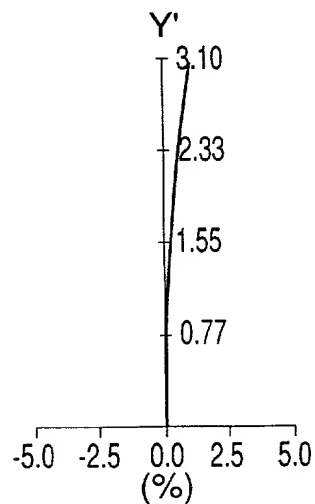

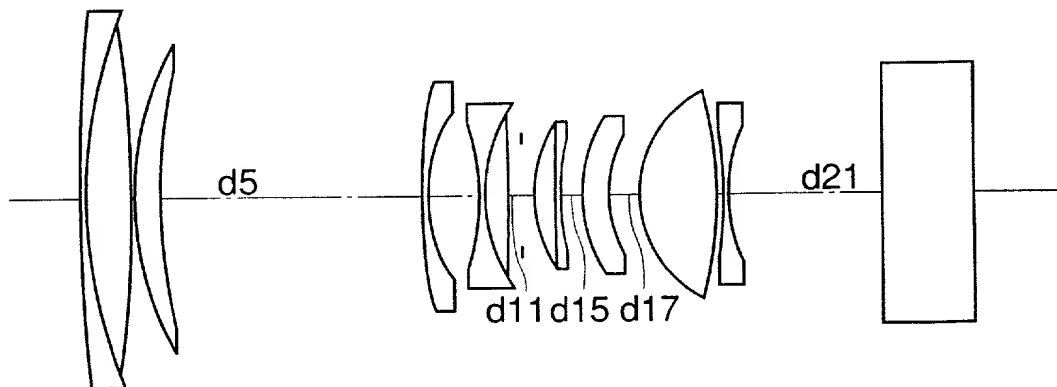


[illegible]

FIG. 29A

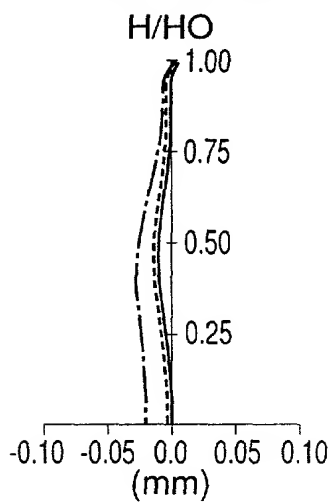


FIG. 29B

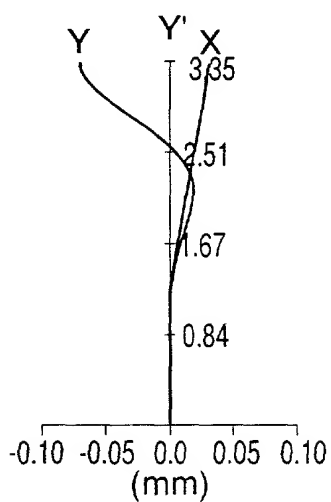


FIG. 29C

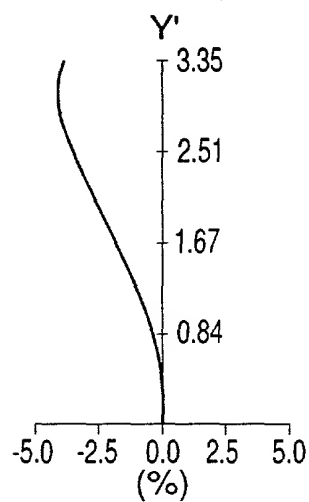


FIG. 29D

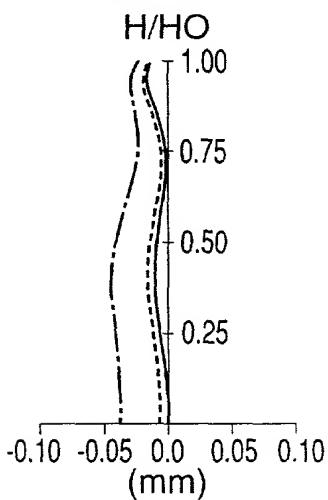


FIG. 29E

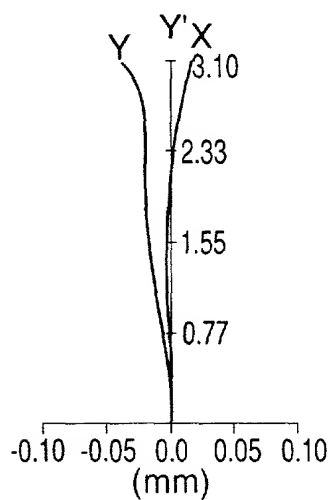


FIG. 29F

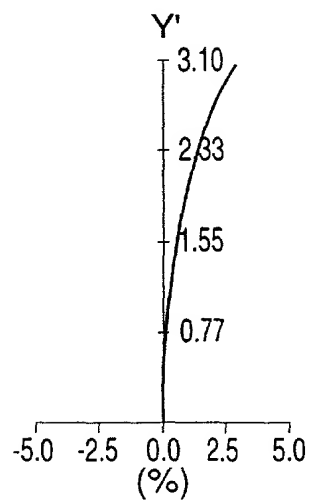


FIG. 29G

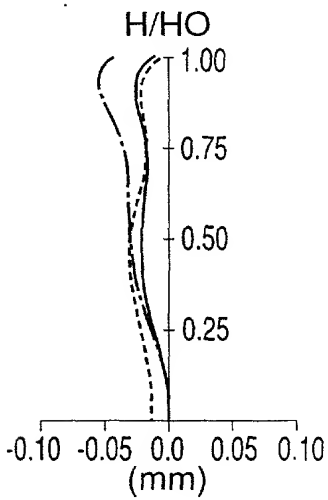


FIG. 29H

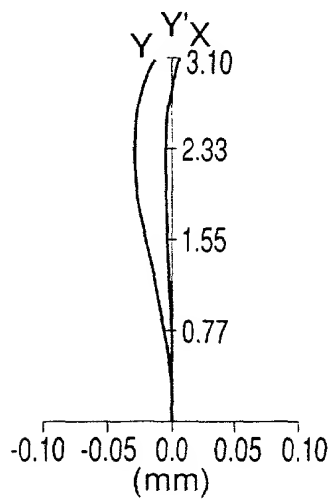


FIG. 29I

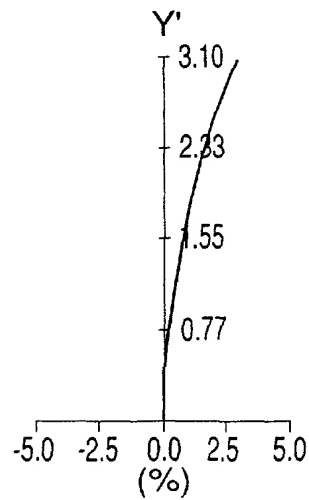


FIG. 30A

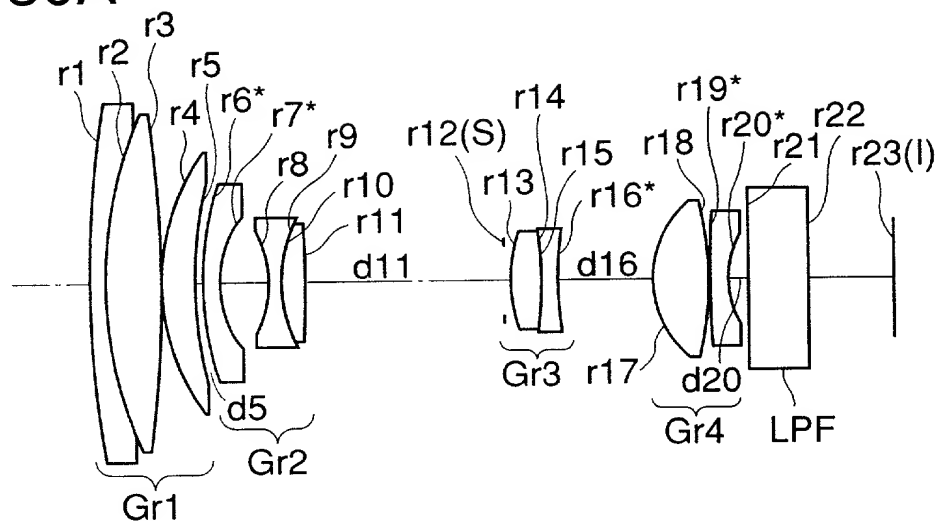


FIG. 30B

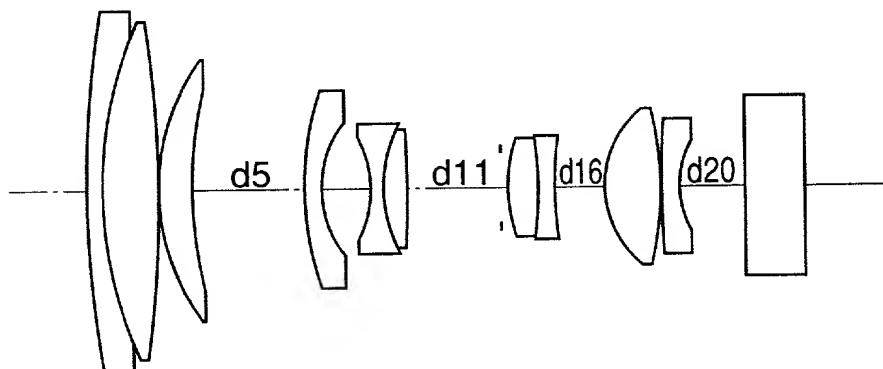


FIG. 30C

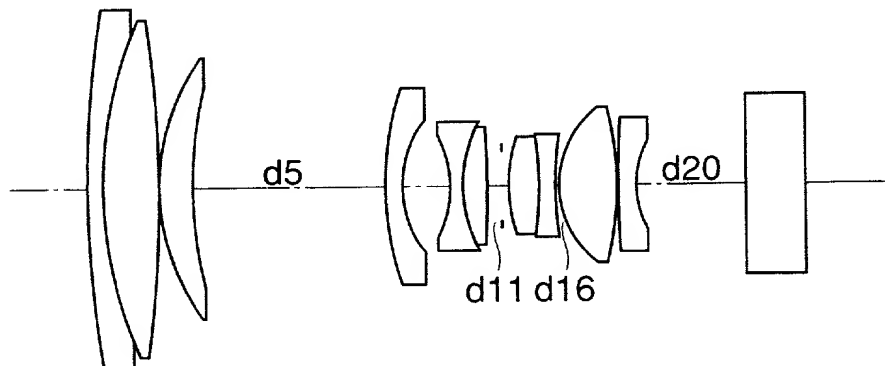


FIG. 31A

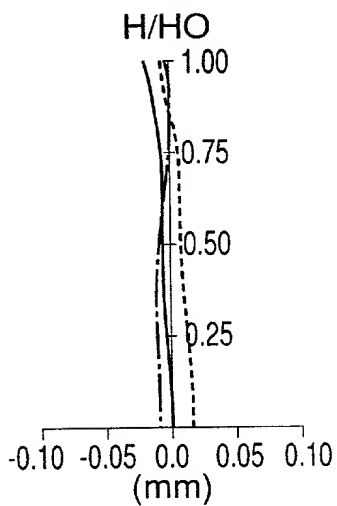


FIG. 31B

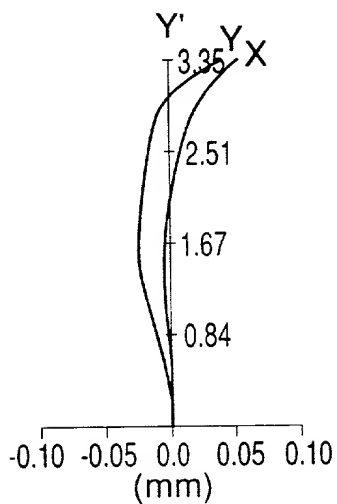


FIG. 31C

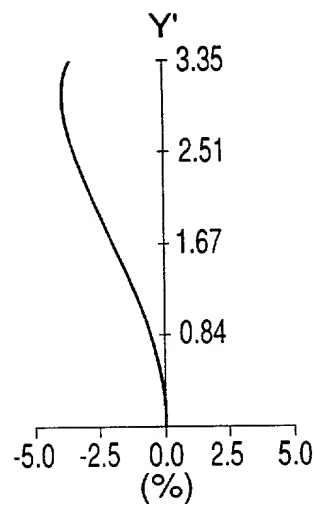


FIG. 31D

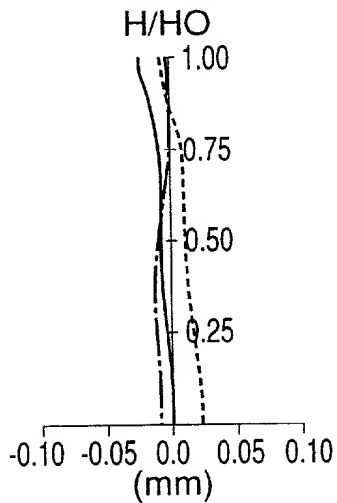


FIG. 31E

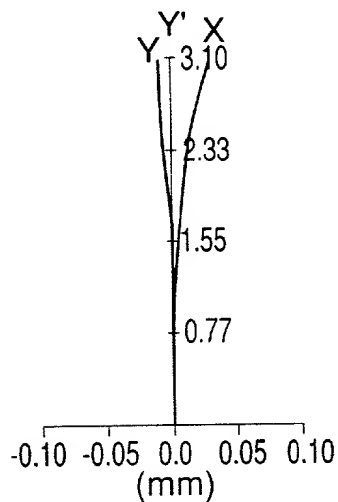


FIG. 31F

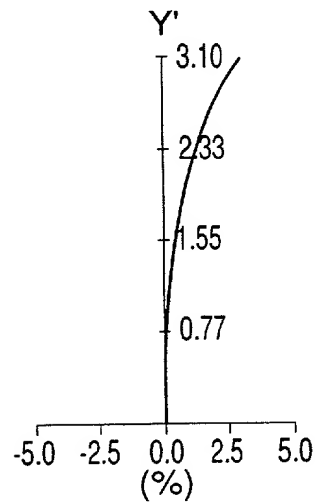


FIG. 31G

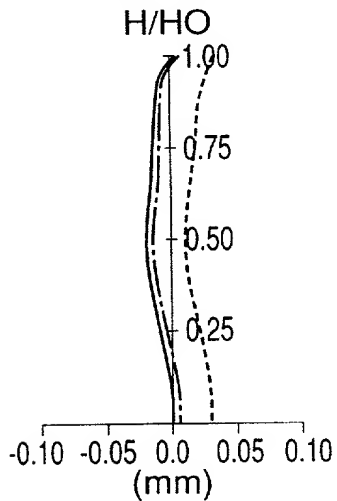


FIG. 31H

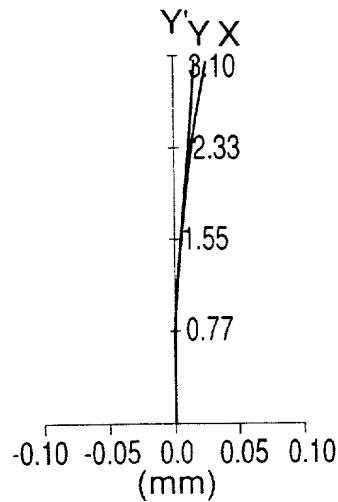


FIG. 31I

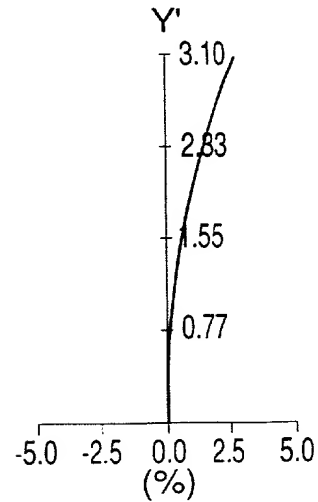


FIG. 32A

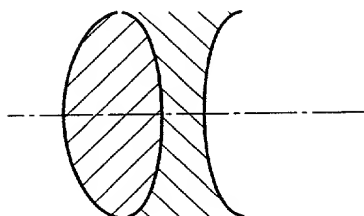


FIG. 32B

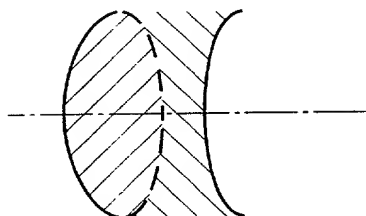


FIG. 32C




FIG. 33A

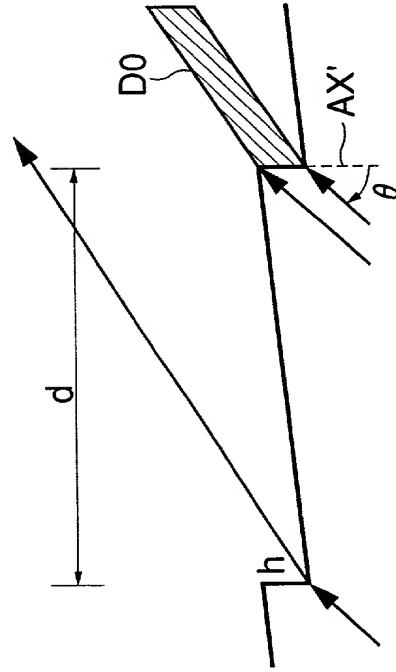


FIG. 33B

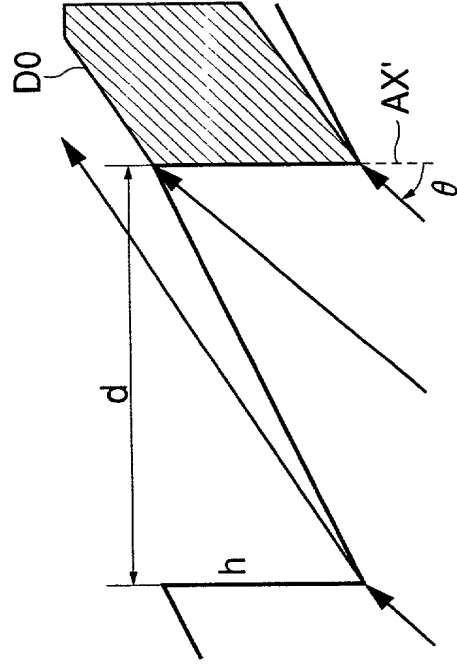


FIG. 34

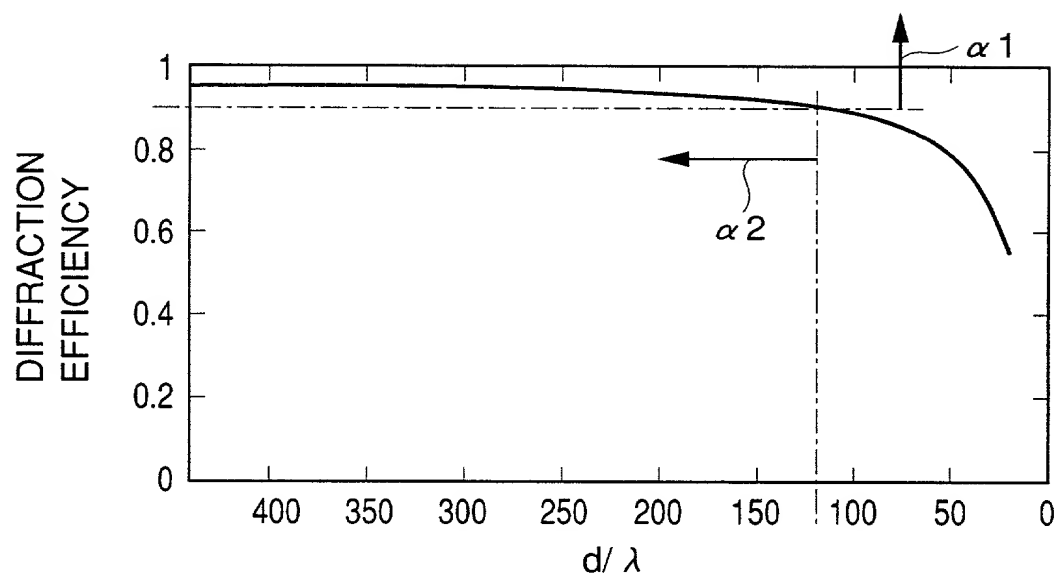


FIG. 35

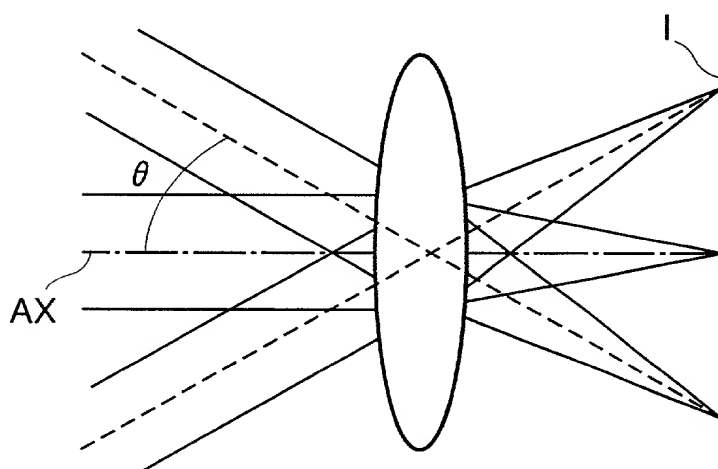


FIG. 36A

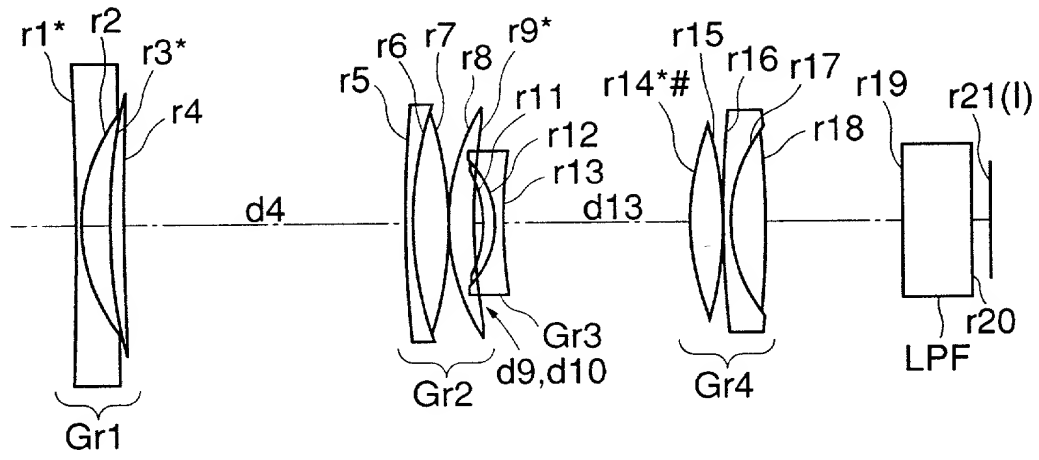


FIG. 36B

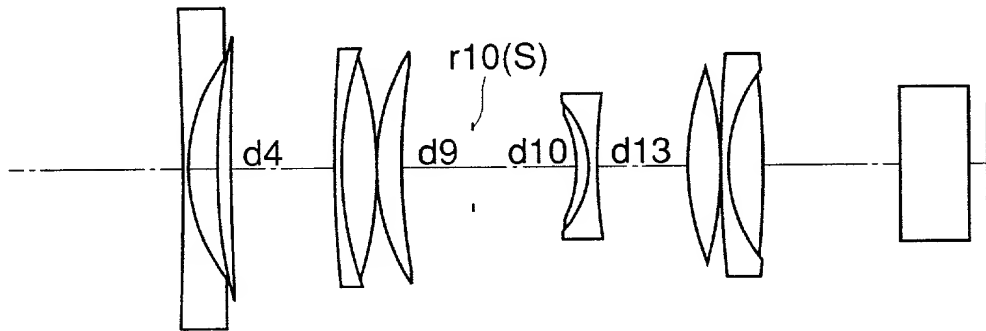


FIG. 36C

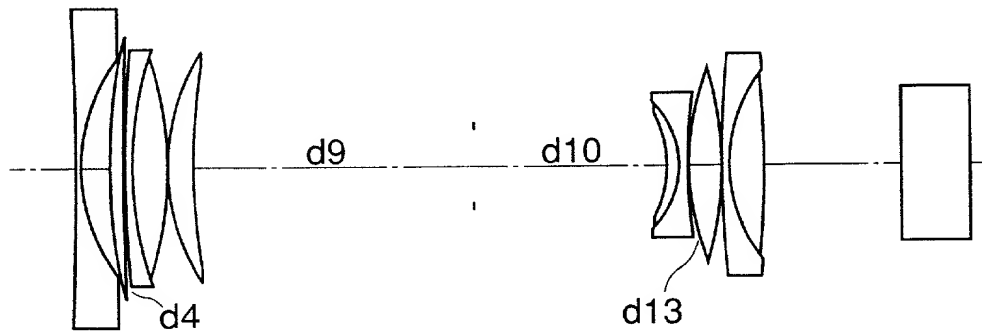


FIG. 37A

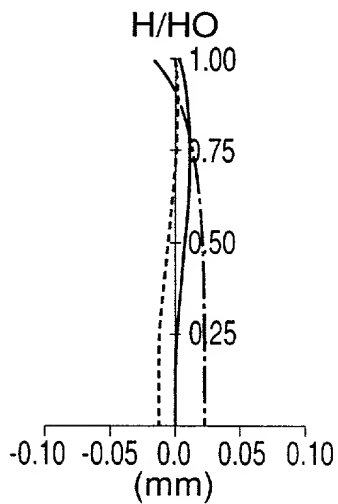


FIG. 37B

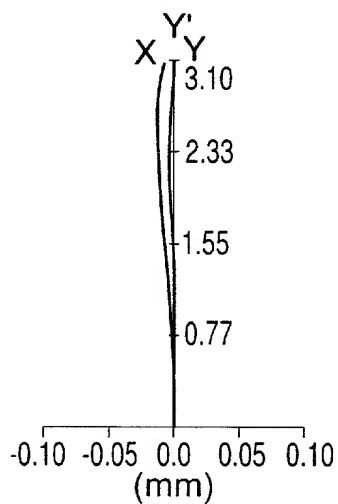


FIG. 37C

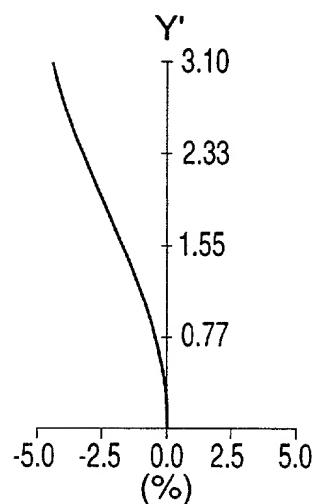


FIG. 37D

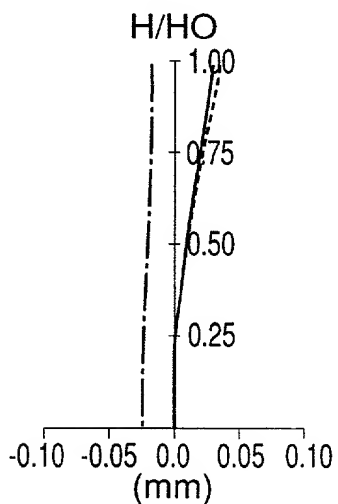


FIG. 37E

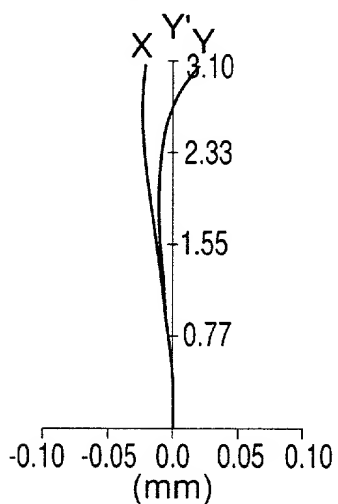


FIG. 37F

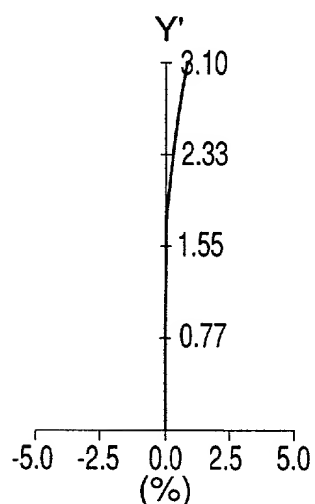


FIG. 37G

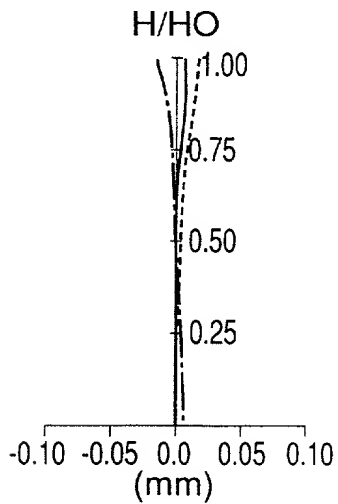


FIG. 37H

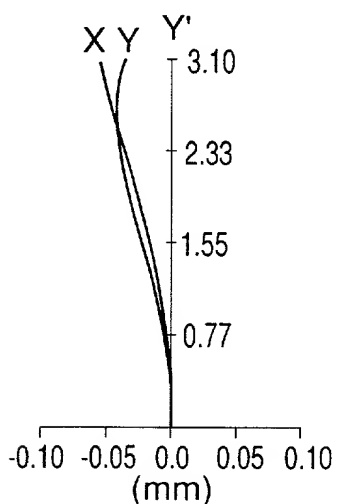


FIG. 37I

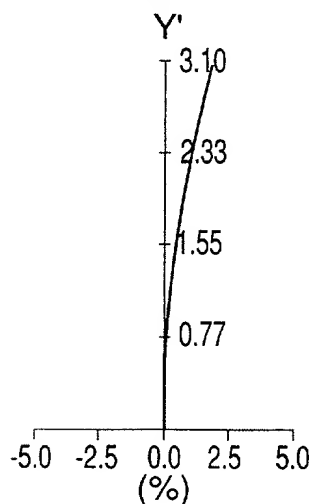


FIG. 38A

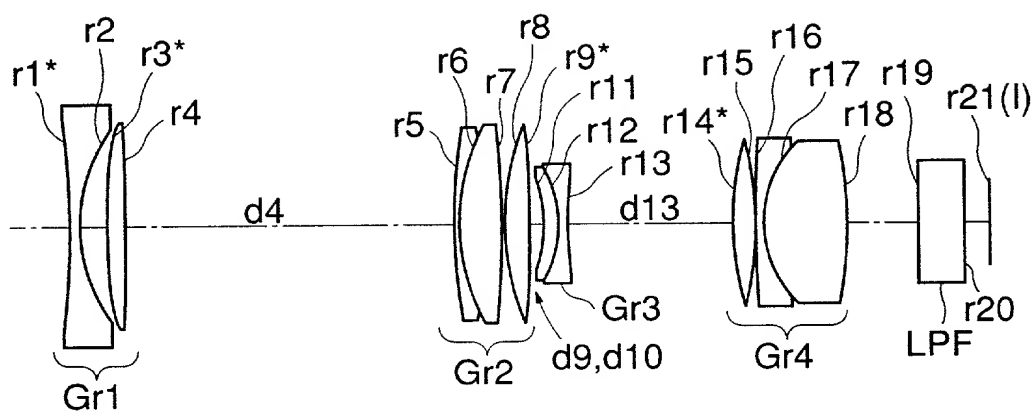


FIG. 38B

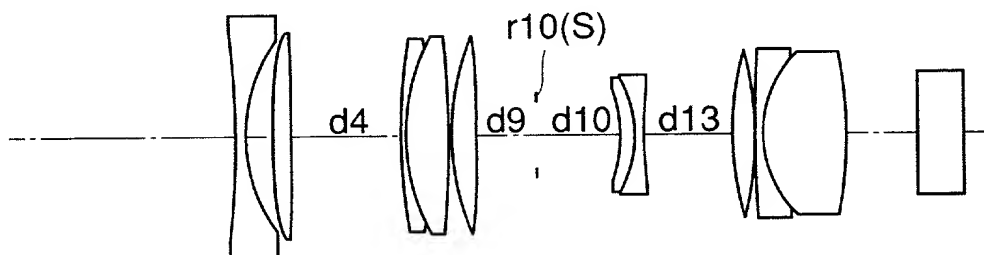


FIG. 38C

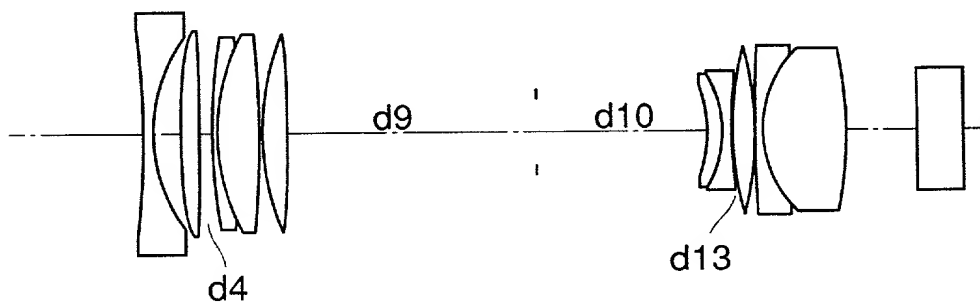


FIG. 39A

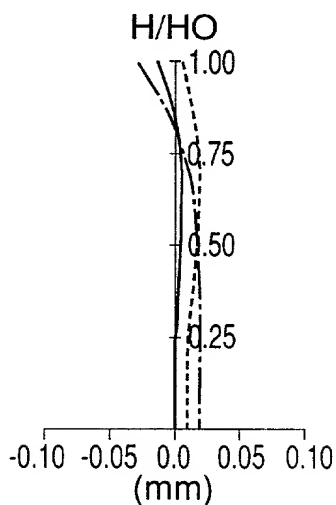


FIG. 39B

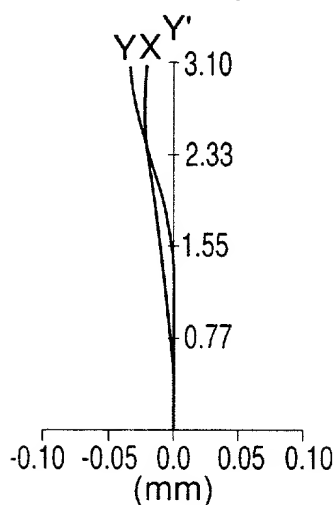


FIG. 39C

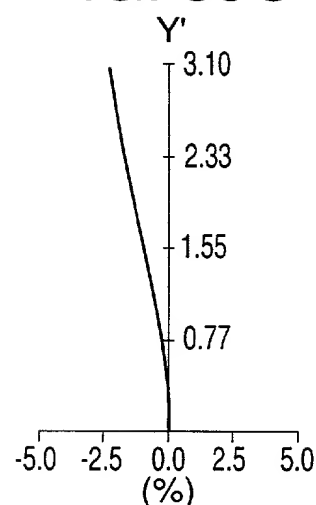


FIG. 39D

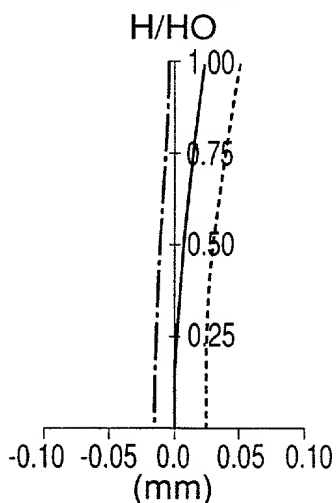


FIG. 39E

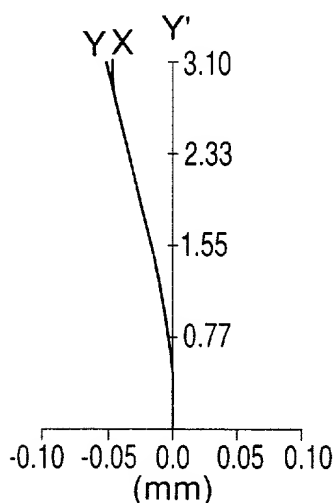


FIG. 39F

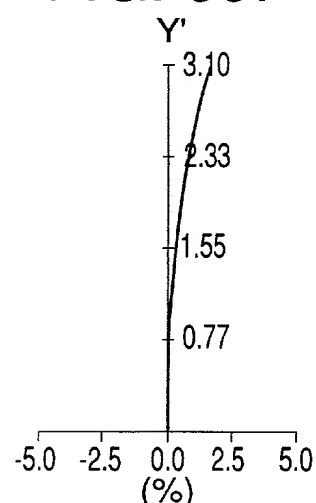


FIG. 39G

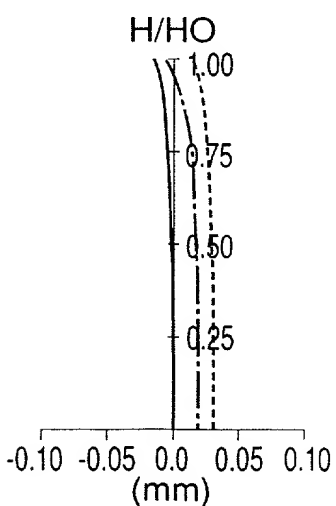


FIG. 39H

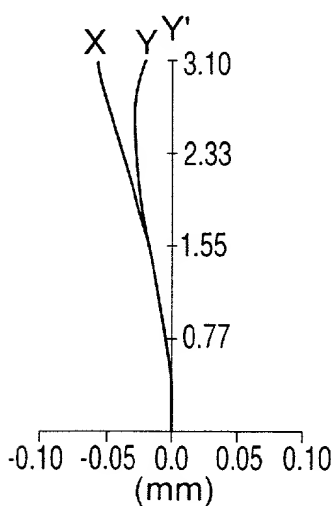


FIG. 39I

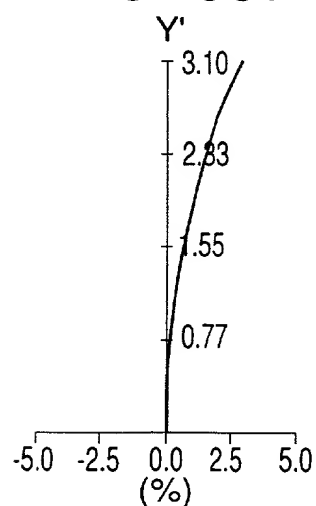


FIG. 40A

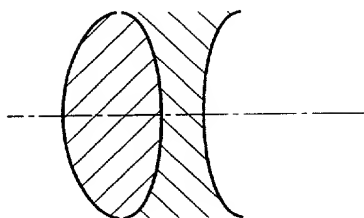


FIG. 40B


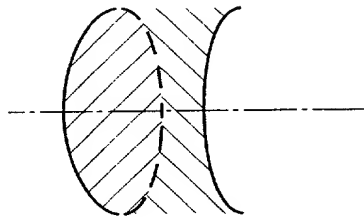


FIG. 40C



COMBINED DECLARATION FOR PATENT APPLICATION AND POWER OF ATTORNEY
(Includes Reference to Provisional and PCT International Applications)

ATTORNEY'S DOCKET NUMBER

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name;

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

A LENS OPTICAL SYSTEM

the specification of which (check only one item below):

☒ is attached hereto.

☐ was filed as United States application

Number _____

on _____

and was amended

on _____ (if applicable).

☐ was filed as PCT international application

Number _____

on _____

and was amended under PCT Article 19

on _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, §1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, §119 (a)-(e) of any foreign application(s) for patent or inventor's certificate or of any PCT international application(s) designating at least one country other than the United States of America listed below and have also identified below any foreign application(s) for patent or inventor's certificate or any PCT international application(s) designating at least one country other than the United States of America filed by me on the same subject matter having a filing date before that of the application(s) of which priority is claimed:

PRIOR FOREIGN/PCT APPLICATION(S) AND ANY PRIORITY CLAIMS UNDER 35 U.S.C. §119:

COUNTRY (if PCT, indicate "PCT")	APPLICATION NUMBER	DATE OF FILING (day, month, year)	PRIORITY CLAIMED UNDER 35 U.S.C. §119
Japan	H10-110612	21/04/1998	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No
Japan	H11-025694	03/02/1999	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No
Japan	H11-025686	03/02/1999	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No
Japan	H11-030097	08/02/1999	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No
Japan	H11-025692	03/02/1999	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No

I hereby claim the benefit under Title 35, United States Code § 119(e) of any United States provisional application(s) listed below.

(Application Number)

(Filing Date)

(Application Number)

(Filing Date)

COMBINED DECLARATION FOR PATENT APPLICATION AND POWER OF ATTORNEY (CONTINUED)
(Includes Reference to Provisional and PCT International Applications)

ATTORNEY'S DOCKET NO.

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) or PCT international application(s) designating the United States of America that is/are listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in that/those prior application(s) in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose to the Office all information known to me to be material to the patentability as defined in Title 37, Code of Federal Regulations §1.56, which became available between the filing date of the prior application(s) and the national or PCT international filing date of this application:

PRIOR U.S. APPLICATIONS OR PCT INTERNATIONAL APPLICATIONS DESIGNATING THE U.S. FOR BENEFIT UNDER 35 U.S.C. 120:

U.S. APPLICATIONS

STATUS (check one)

U.S. APPLICATION NUMBER

U.S. FILING DATE

PATENTED

PENDING

ABANDONED

09/294,385

April 20, 1999

X

PCT APPLICATIONS DESIGNATING THE U.S.

PCT APPLICATION NO.

PCT FILING DATE

U.S. APPLICATION NUMBERS
ASSIGNED (if any)

I hereby appoint the following attorneys and agent(s) to prosecute said application and to transact all business in the Patent and Trademark Office connected therewith and to file, prosecute and to transact all business in connection with international applications directed to said invention:

William L. Mathis	17,337	George A. Hovanec, Jr.	28,223	Peter K. Skiff	31,917
Peter H. Smolka	15,913	James A. LaBarre	28,632	Richard J. McGrath	29,195
Robert S. Swecker	19,885	E. Joseph Gess	28,510	Matthew L. Schneider	32,814
Platon N. Mandros	22,124	R. Danny Huntington	27,903	Michael G. Savage	32,596
Benton S. Duffett, Jr.	22,030	Eric H. Weisblatt	30,505	Gerald F. Swiss	30,113
Norman H. Stepno	22,716	James W. Peterson	26,057	Michael J. Ure	33,089
Ronald L. Grudziecki	24,970	Teresa Stanek Rea	30,427	Charles F. Wieland III	33,096
Frederick G. Michaud, Jr.	26,003	Robert E. Krebs	25,885	Bruce T. Wieder	33,815
Alan E. Kopecki	25,813	William C. Rowland	30,888	Todd R. Walters	34,040
Regis E. Slutter	26,999	T. Gene Dillahunt	25,423	Ronni S. Jillions	31,979
Samuel C. Miller, III	27,360	Patrick C. Keane	32,858	Harold R. Brown III	36,341
Ralph L. Freeland, Jr.	16,110	Bruce J. Boggs, Jr.	32,344	Allen R. Baum	36,086
Robert G. Mukai	28,531	William H. Benz	25,952	Steven M. du Bois	35,023

and:

Address all correspondence to:

PLATON N. MANDROS
BURNS, DOANE, SWECKER & MATHIS, L.L.P.
P.O. Box 1404
Alexandria, Virginia 22313-1404



21839

PATENT TRADEMARK OFFICE

Address all telephone calls to: Platon N. Mandros

at (703) 836-6620.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

COMBINED DECLARATION FOR PATENT APPLICATION AND POWER OF ATTORNEY (CONTINUED) (Includes Reference to Provisional and PCT International Applications)		ATTORNEY'S DOCKET NO.	
FULL NAME OF SOLE OR FIRST INVENTOR Shigeto OHMORI		SIGNATURE <i>Shigeto Ohmori</i>	DATE Nov. 4, 1999
RESIDENCE Kawachinagano-Shi, Osaka, Japan		CITIZENSHIP Japan	
POST OFFICE ADDRESS C/O MINOLTA CO., LTD., Osaka Kokusai Bldg., 3-13, 2-Chome Azuchi-Machi, Chuo-Ku, Osaka-Shi, Osaka 541-8556 Japan			
FULL NAME OF SECOND JOINT INVENTOR, IF ANY Yuichiro ORI		SIGNATURE <i>Yuichiro Ori</i>	DATE Oct. 25, 1999
RESIDENCE Moriyama-Shi, Shiga-Ken, Japan		CITIZENSHIP Japan	
POST OFFICE ADDRESS C/O MINOLTA CO., LTD., Osaka Kokusai Bldg., 3-13, 2-Chome Azuchi-Machi, Chuo-Ku, Osaka-Shi, Osaka 541-8556 Japan			
FULL NAME OF THIRD JOINT INVENTOR, IF ANY		SIGNATURE	DATE
RESIDENCE		CITIZENSHIP	
POST OFFICE ADDRESS			
FULL NAME OF FOURTH JOINT INVENTOR, IF ANY		SIGNATURE	DATE
RESIDENCE		CITIZENSHIP	
POST OFFICE ADDRESS			
FULL NAME OF FIFTH JOINT INVENTOR, IF ANY		SIGNATURE	DATE
RESIDENCE		CITIZENSHIP	
POST OFFICE ADDRESS			
FULL NAME OF SIXTH JOINT INVENTOR, IF ANY		SIGNATURE	DATE
RESIDENCE		CITIZENSHIP	
POST OFFICE ADDRESS			
FULL NAME OF SEVENTH JOINT INVENTOR, IF ANY		SIGNATURE	DATE
RESIDENCE		CITIZENSHIP	
POST OFFICE ADDRESS			
FULL NAME OF EIGHTH JOINT INVENTOR, IF ANY		SIGNATURE	DATE
RESIDENCE		CITIZENSHIP	
POST OFFICE ADDRESS			
FULL NAME OF NINTH JOINT INVENTOR, IF ANY		SIGNATURE	DATE
RESIDENCE		CITIZENSHIP	
POST OFFICE ADDRESS			